

| | | | | |
|---|------|------|---|---|
| MODENA SQUARE SURFACE LED PANEL FAMILY DATASHEET | IP44 | IK03 | □ | TOPE  |
|---|------|------|---|---|

MODENA PRO

Surface/suspended edge lit LED luminaire with a slim 27mm profile. Electronic, fixed output gear. IP44 protection degree. IK03. Body: sheet aluminium white (RAL9016). Diffuser: UV-stabilised, PRO-LINE prismatic optic. Electrical connection via push wire terminal blocks. Complete with 4000K LED. With integrated driver.

Dimensions: 87x87x27mm

Luminaire efficiency: 68-84 lm/W

Weight: 0,46 kg


Light source: LED

Color rendering index: >80

Correlated colour temperature: 4000 Kelvin

Rated median useful life: 50000 L80 25°C

Rated output: Fixed output

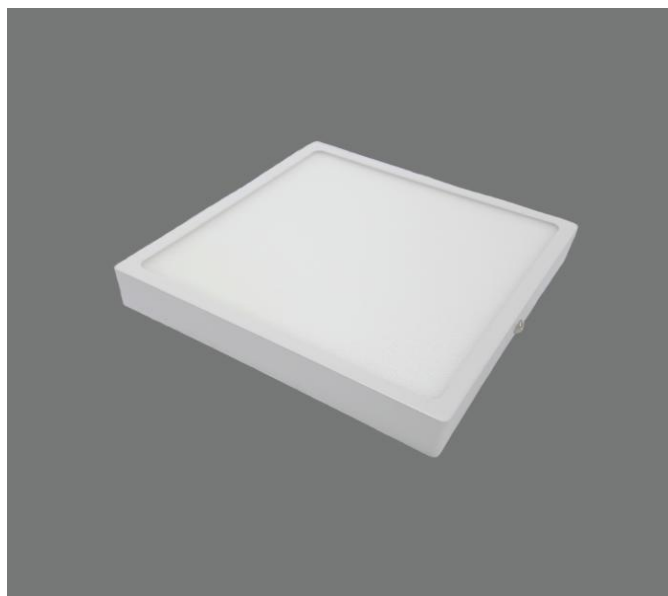

TECHNICAL DATA

| Article | Model | Product description | |
|-----------------|-----------------------|-----------------------------------|--------------|
| 6004000022 | MODENA80_S_8W_LED_570 | TOPE LED PANEL LIGHT 8W, Ø87x87mm | |
| Nominal wattage | 8.0W | Color temperature | 4000K |
| Nominal Voltage | 220-240V | Luminous flux | 461lm |
| Power factor | 0.90 | CRI | 80 |
| Frequency | 50/60Hz | Dimming | Not dimmable |
| Dimensions | 87x87x27mm | Weight | 0,46kg |

| Article | Model | Product description | |
|-----------------|-------------------------|--------------------------------------|--------------|
| 6004000024 | MODENA80_S_16W_LED_1140 | TOPE LED PANEL LIGHT 16W, Ø145x145mm | |
| Nominal wattage | 16.0W | Color temperature | 4000K |
| Nominal Voltage | 220-240V | Luminous flux | 1168lm |
| Power factor | 0.90 | CRI | 80 |
| Frequency | 50/60Hz | Dimming | Not dimmable |
| Dimensions | 145x145x27mm | Weight | 1,0kg |

| Article | Model | Product description | |
|-----------------|-------------------------|--------------------------------------|--------------|
| 6004000025 | MODENA80_S_22W_LED_1570 | TOPE LED PANEL LIGHT 22W, Ø170x170mm | |
| Nominal wattage | 22.0W | Color temperature | 4000K |
| Nominal Voltage | 220-240V | Luminous flux | 1772lm |
| Power factor | 0.90 | CRI | 80 |
| Frequency | 50/60Hz | Dimming | Not dimmable |
| Dimensions | 170x170x27mm | Weight | 1,1kg |

TopE Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.

© TopE Lighting

| | | | | |
|---|------|------|---|---|
| MODENA SQUARE SURFACE LED PANEL FAMILY DATASHEET | IP44 | IK03 | □ | TOPE  |
|---|------|------|---|---|

| Article | Model | Product description | |
|-----------------|-------------------------|--------------------------------------|--------------|
| 6004000026 | MODENA80_S_30W_LED_2150 | TOPE LED PANEL LIGHT 30W, Ø220x220mm | |
| Nominal wattage | 30.0W | Color temperature | 4000K |
| Nominal Voltage | 220-240V | Luminous flux | 2147lm |
| Power factor | 0.90 | CRI | 80 |
| Frequency | 50/60Hz | Dimming | Not dimmable |
| Dimencions | 220x220x27mm | Weight | 1,3kg |