

SPLIT SQUARE LED PANEL FAMILY DATASHEET

IP44

IK03

**TOPE** **SPLIT PRO**

A recessed/surface/suspended edge lit LED luminaire with a slim 7mm profile. Electronic, fixed output gear. IP44 protection degree. IK03. Body: sheet aluminium white (RAL9016). Diffuser: UV-stabilised, PRO-LINE prismatic optic. Electrical connection via push wire terminal blocks. Complete with 4000K LED. With integrated driver.

Dimencions: 220x220x7 mm.

Luminaire efficiancy: 68-76 lm/W

Weight: 0,4 kg

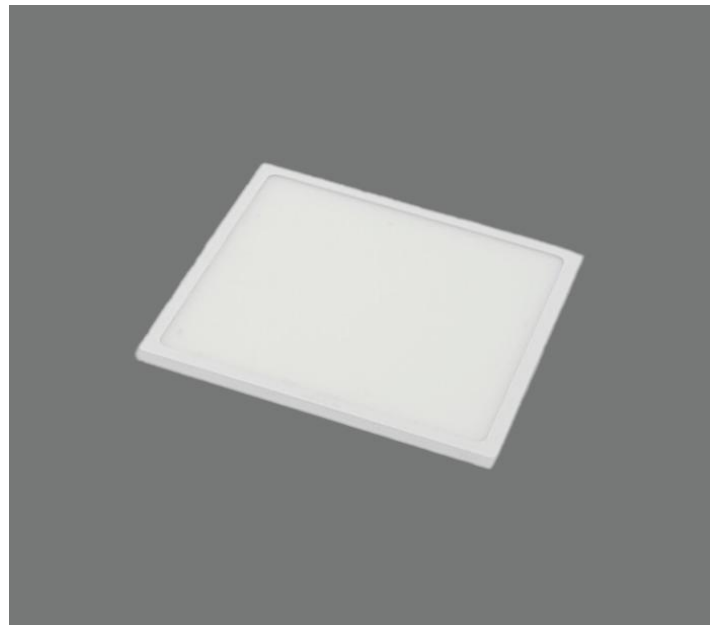
Light source: LED

Color rendering index: >80

Correlated colour temperature: 4000 Kelvin

Rated median usefull life: 50000 L80 25°C

Rated output: Fixed.

**TECHNICAL DATA**

Article	Model	Product description	
6003000023	SPLIT80_S_5W_LED_355	TOPE LED PANEL LIGHT 5W, 75x75mm	
Nominal wattage	5.0W	Color temperature	4000K
Nominal Voltage	220-240V	Luminous flux	325lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	75x75x7mm	Weight	0.4kg

Article	Model	Product description	
6003000024	SPLIT80_S_8W_LED_570	TOPE LED PANEL LIGHT 8W, 87x87mm	
Nominal wattage	8.0W	Color temperature	4000K
Nominal Voltage	220-240V	Luminous flux	461lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	87x87x7mm	Weight	0,44kg

Article	Model	Product description	
6003000026	SPLIT80_S_16W_LED_1140	TOPE LED PANEL LIGHT 16W, 145x145mm	
Nominal wattage	16.0W	Color temperature	4000K
Nominal Voltage	220-240V	Luminous flux	1168lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	145x145x7mm	Weight	0,87kg

TopE Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.

© TopE Lighting

SPLIT SQUARE LED PANEL FAMILY DATASHEET	IP44	IK03	<input type="checkbox"/>	TOPE 
--	-------------	-------------	--------------------------	---

Article	Model	Product description	
60032000026	SPLIT80_S_16W_LED_1140EME	TOPE LED PANEL LIGHT 16W, 145x145mm, Emergency	
Nominal wattage	16.0W	Luminous flux	1168lm
Nominal Voltage	220-240V	CRI	80
Power factor	0.90	Dimming	Emergency
Frequency	50/60Hz	Emergency luminous flux	720lm
Color temperature	4000K	Emergency working time	3 Hours
Dimencions	145x145mm	Weight	0,87kg

Article	Model	Product description	
6003000027	SPLIT80_S_22W_LED_1570	TOPE LED PANEL LIGHT 22W,170x170mm	
Nominal wattage	22.0W	Color temperature	4000K
Nominal Voltage	220-240V	Luminous flux	1772lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	170x170x7mm	Weight	0,98kg

Article	Model	Product description	
60032000021	SPLIT80_S_22W_LED_1570EME	TOPE LED PANEL LIGHT 22W, Ø170x170mm, Emergency	
Nominal wattage	22.0W	Luminous flux	1772lm
Nominal Voltage	220-240V	CRI	80
Power factor	0.90	Dimming	Emergency
Frequency	50/60Hz	Emergency luminous flux	720lm
Color temperature	4000K	Emergency working time	3 Hours
Dimencions	170x170x7mm	Weight	0,98kg

Article	Model	Product description	
6003000027	SPLIT80_S_30W_LED_2150	TOPE LED PANEL LIGHT 30W,Ø220x220mm	
Nominal wattage	30.0W	Color temperature	4000K
Nominal Voltage	220-240V	Luminous flux	2147lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	220x220x7mm	Weight	1,27kg

Article	Model	Product description	
60032000028	SPLIT80_S_30W_LED_2150EME	TOPE LED PANEL LIGHT 30W, Ø220x220mm, Emergency	
Nominal wattage	30.0W	Luminous flux	2147lm
Nominal Voltage	220-240V	CRI	80
Power factor	0.90	Dimming	Emergency
Frequency	50/60Hz	Emergency luminous flux	720lm
Color temperature	4000K	Emergency working time	3 Hours
Dimencions	220x220x7mm	Weight	1,27kg

TopE Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.

© TopE Lighting