




ALICE 500

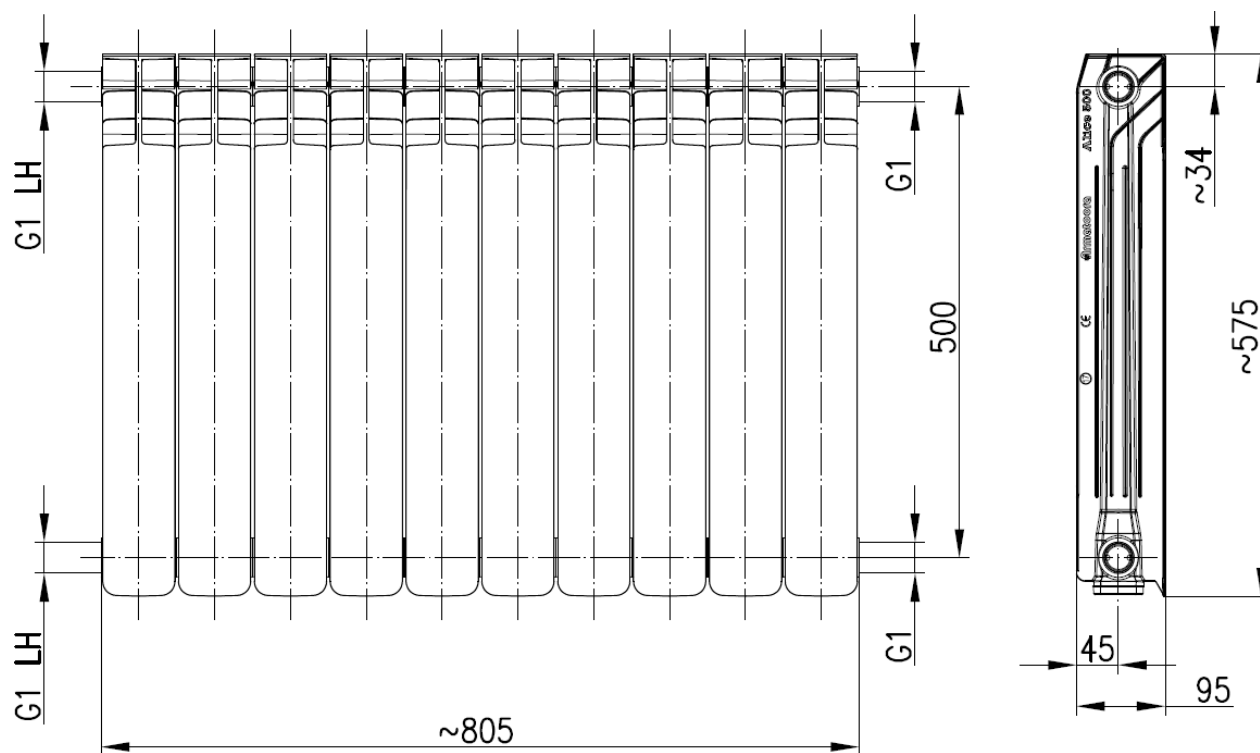

Technical details of 10-elements set	
Total height of the radiator	576,0 mm
Total width of the radiator	805,0 mm
Total depth of the radiator	95,0 mm
Connections spacing	500,0 mm
Connections nominal diameter	1,0 inch
Water capacity of the radiator	2,65 liters
Weight of the radiator	13,8 kg
Maximal working temperature	95 °C
Nominal operating pressure	16 bar
Nominal heat output ($\Delta T = (t_{in} + t_{out})/2 - t_{surr}$):	
For $\Delta T = 30^{\circ}\text{C}$, $t_{in} = 55^{\circ}\text{C}$, $t_{out} = 45^{\circ}\text{C}$, $t_{surr} = 20^{\circ}\text{C}$	607,0 W
For $\Delta T = 50^{\circ}\text{C}$, $t_{in} = 75^{\circ}\text{C}$, $t_{out} = 65^{\circ}\text{C}$, $t_{surr} = 20^{\circ}\text{C}$	1180,0 W
For $\Delta T = 60^{\circ}\text{C}$, $t_{in} = 90^{\circ}\text{C}$, $t_{out} = 70^{\circ}\text{C}$, $t_{surr} = 20^{\circ}\text{C}$	1497,0 W
Thermal characteristic, approx. (heat output equation), n – number of elements	$\Phi = (n/10) \cdot 7,206 \cdot \Delta T^{1,303}$
Warranty	15 years
Product index:	792-100-44
Colour	White, RAAL 9016
PKWiU	25.99.29-55.01
EAN	5907571790031
Quantity in a bulk packaging unit/bulk	1/42

Features Hygienic attestation, Declaration of conformity