


BOREAS

Discharge Floodlight for Metal Halide Lamps with Asymmetric Reflector

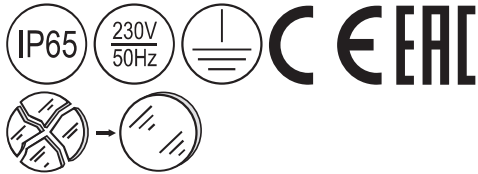

- Type:** A range of discharge floodlights with asymmetric reflector for metal halide lamps. IP65 – water and dust protection for use in adverse conditions.
- Specification:** Faceted asymmetric reflector in anodized aluminium, clear glass diffuser.
Body in aluminium in dark grey finish.
Luminaire is plastic-wrapped and boxed individually.
- Installation:** Suitable for any horizontal and/or vertical surfaces.
- Application:** Outdoor. Efficient floodlight for building facades and perimeters, billboards, displays, car parks, etc.

Name	Lamp (W) and holder	Overall dimensions (LxWxH), mm	Weight, kg	Total wattage, W
Boreas 1150 I77 HI	1x150 (E27)	514x420x146	7,2	168
Boreas 1250 E75 HI	1x250 (E40)	514x420x146	8,2	280
Boreas 1400 E76 HI	1x400 (E40)	514x420x146	9	440
Boreas 1150 I77 HS	1x150 (E27)	514x420x146	7,2	168
Boreas 1250 E75 HS	1x250 (E40)	514x420x146	8,2	280
Boreas 1400 E76 HS	1x400 (E40)	514x420x146	9	440

Options available on request:

- HF – High Frequency control gear
- TIM – Timed ignitor
- HI – For metal halide lamp
- HS – For high pressure sodium lamp

BOREAS 1250 E75 HI

