
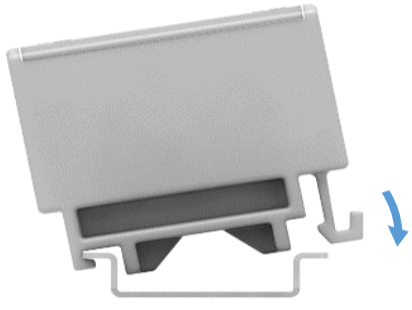


Product data							
Product code	Product name	$I_{n Al}$	$I_{n Cu}$	U_n	US specific		
					$I_{max Al}$	$I_{max Cu}$	U_{max}
VC05-0054	OTL-connector 3xAl/Cu (1x50 mm ²) Grey	145 A	160 A	1000 V	120 A	150 A	600 V


Installation

Type	DIN-rail mounting
------	--------------------------





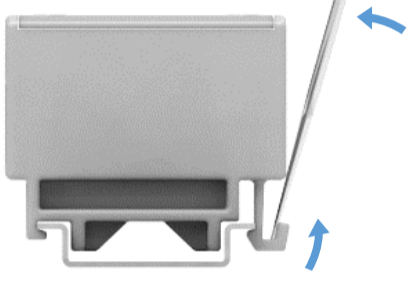


DIN-rail mounting
Set the connector on DIN-rail. See picture. Push until connector locks down.




Removing from DIN-rail
Release the plastic snap with screwdriver. Lift the connector.



Connection

	Thread	M10	Tightening torque	1,5-2,5 mm ² (14-16 AWG)	1,5 Nm	Stripping length L	15 mm
	SW	5		4-10 mm ² (8-12 AWG)	5 Nm		
			16-50 mm ² (1/0-6 AWG)	10 Nm			
			-	-			
Max. Wire cross section			50 mm²				

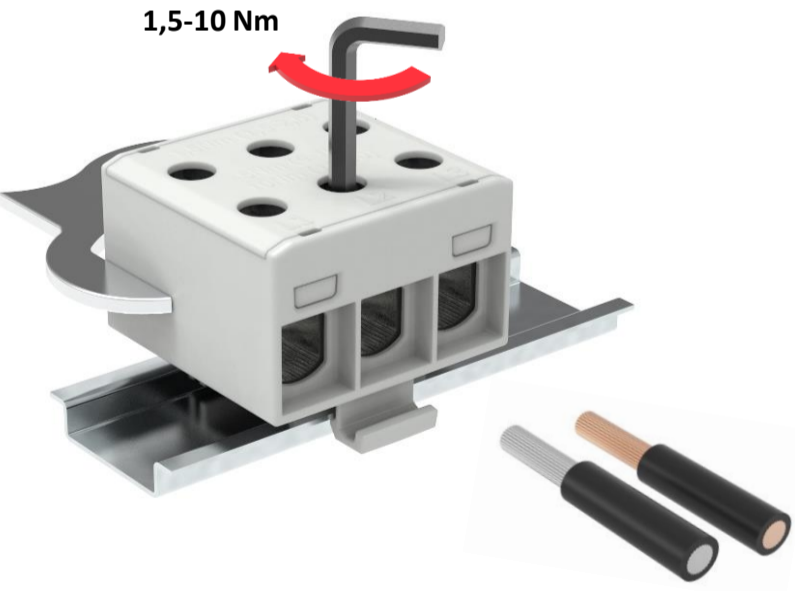

1,5-10 Nm

Installation

Connector can be used for both **copper- or aluminium conductors**. It's recommended to use anti-corrosion paste for aluminium conductors. (e.g. Penetrox).

It is allowed to use max. three adjacent cross sectioned conductors per space (Copper conductors). The nominal max. cross section value must not be exceeded.

It is allowed to install only one aluminium conductor per space.

Using ferrule is recommended for fine stranded conductors.

Sector shaped conductors must be pre-rounded before installation.

Support connector during tightening the screws.

Cross section and max. number of Cu- conductors / space (Al- conductors in parenthesis)

1,5 mm ²	2,5 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²	The specified max. amount of conductors refers only to industrially installed terminals.		
3 (1)	3 (1)	3 (1)	3 (1)	3 (1)	2 (1)	1 (1)	1 (1)			
			70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²	400 mm ²
			-	-	-	-	-	-	-	-

Ouneva Oy

 Teollisuustie 21
 FI-82730 Tuupovaara, Finland

 Tel. +358 400 179 750
info@ouneva.fi
www.ounevagroup.fi
www.ounevaproducts.fi