


Product data							
Product code	Product name	$I_n$ Al	$I_n$ Cu	$U_n$	US specific		
					$I_{max}$ Al	$I_{max}$ Cu	$U_{max}$
<b>VC05-0010</b>	OTL-connector 1xAl/Cu 1,5-16mm <sup>2</sup> (Grey)	75 A	82 A	1000 V	65 A	85 A	600 V
<b>VC05-0001</b>	OTL-connector 1xAl/Cu 1,5-16mm <sup>2</sup> (Blue)	75 A	82 A	1000 V	65 A	85 A	600 V
<b>VC05-0045</b>	OTL-connector 1xAl/Cu 1,5-16mm <sup>2</sup> (Yellow/Green)	75 A	82 A	1000 V	65 A	85 A	600 V
<b>VC05-0140</b>	OTL-connector 1xAl/Cu 1,5-16mm <sup>2</sup> (Red)	75 A	82 A	1000 V	-	-	-
<b>VC05-0141</b>	OTL-connector 1xAl/Cu 1,5-16mm <sup>2</sup> (Black)	75 A	82 A	1000 V	-	-	-


### Installation

Type **DIN-rail mounting**

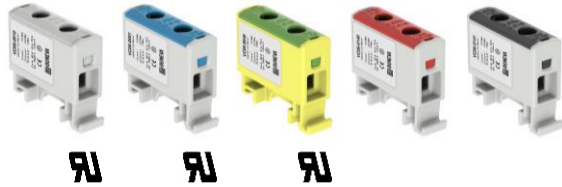

#### DIN-rail mounting



Set the connector on DIN-rail.  
Push until connector locks down.

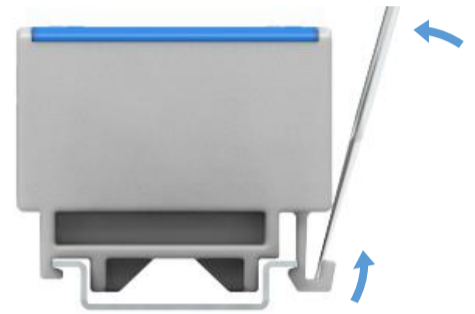


#### Removing from DIN-rail

Release the plastic snap with a screwdriver. Lift the connector.



Connection								
<div>Screw</div> <div></div>	Thread	M8	Tightening torque		1,5 mm <sup>2</sup> (16 AWG)	1,5 Nm	<div>Stripping length L</div> <div></div>	13 mm
	SW	4		2,5-6 mm <sup>2</sup> (10-14 AWG)	3,5 Nm			
				10-16 mm <sup>2</sup> (4-8 AWG)	7 Nm			
				-	-			
			Max. Wire cross section		16 mm <sup>2</sup>			

### Installation

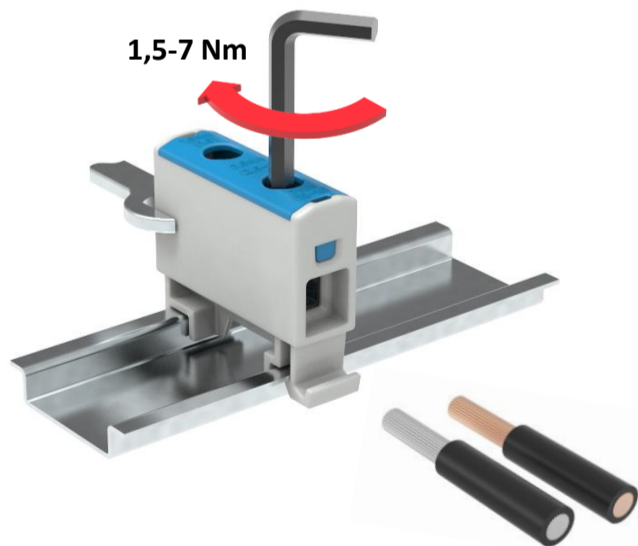

1,5-7 Nm

Connector can be used for both **copper- or aluminium conductors**. It's recommended to use anti-corrosion paste for aluminium conductors. (e.g. Penetrox).

It is allowed to use max. three adjacent cross sectioned conductors per space (Copper conductors). The nominal max. cross section value must not be exceeded.

It is allowed to install only one aluminium conductor per space.

Using ferrule is recommended for fine stranded conductors.

Sector shaped conductors must be pre-rounded before installation.

Support connector during tightening the screws.

Each protective or neutral conductor must have their own conductor space. SFS 6000:2007 clause 810.7

Cross section and max. number of Cu- conductors / space (Al- conductors in parenthesis)							
1,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>	6 mm <sup>2</sup>	10 mm <sup>2</sup>	16 mm <sup>2</sup>	25 mm <sup>2</sup>	35 mm <sup>2</sup>	50 mm <sup>2</sup>
<b>3 (1)</b>	<b>3 (1)</b>	<b>2 (1)</b>	<b>1 (1)</b>	<b>1 (1)</b>	-	-	-
				70 mm <sup>2</sup>	95 mm <sup>2</sup>	120 mm <sup>2</sup>	150 mm <sup>2</sup>
				-	-	-	-
				185 mm <sup>2</sup>	240 mm <sup>2</sup>	300 mm <sup>2</sup>	400 mm <sup>2</sup>
				-	-	-	-

The specified max. amount of conductors refers only to industrially installed terminals.

### Ouneva Oy

Teollisuustie 21  
FI-82730 Tuupovaara, Finland

Tel. +358 400 179 750  
[info@ouneva.fi](mailto:info@ouneva.fi)

[www.ounevagroup.fi](http://www.ounevagroup.fi)  
[www.ounevaproducts.fi](http://www.ounevaproducts.fi)