

TOLEDOSENS LED FLOODLIGHTS FAMILY DATASHEET

IP65

IK03



TOPE

TOLEDOSENS PRO

An LED floodlight with symmetric distribution for creating light. Electronic,. Class II electrical, IP65, IK03. Body: die-cast Aluminium (AS9U), powder coated black (RAL 9005). Enclosure: clear Glass. Supplied in one box, ready to install. Mounting attachments to be ordered separately. Complete with Microwave sensor and 4000K LED Microwave sensor maximum height 3,5m. Workplane 180°, 10m from sensor.

Dimencions: 115x136x35 mm

Luminaire efficiency: 83-89 lm/W

Weight: 0,8 kg


Light source: LED

Color rendering index: >80

Correlated colour temperature: 4000 Kelvin

Rated median usefull life: 50000 L80 25°C

Rated output: Fixed output

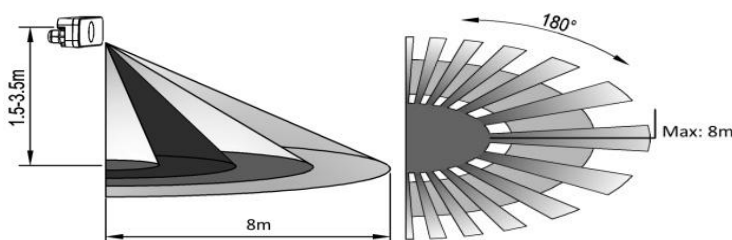

TECHNICAL DATA

Article	Model	Product description	
6008100001	TOLEDOSENS_10W_LED_900	TOPE LED FLOODLIGHT 10W, 115x136mm	
Nominal wattage	10.0W	Color temperature	4000K
Nominal Voltage	220-240V	Luminous flux	850lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	115x136x35mm	Weight	0,8kg

Article	Model	Product description	
6008100002	TOLEDOSENS_20W_LED_1800	TOPE LED FLOODLIGHT 20W, 150x157mm	
Nominal wattage	20.0W	Color temperature	4000K
Nominal Voltage	220-240V	Luminous flux	1690lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	150x157x35mm	Weight	0,95kg

TOLEDOSENS LED FLOODLIGHTS FAMILY DATASHEET	IP65	IK03		TOPE 
--------------------------------------------------------	-------------	-------------	-------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------

Article	Model	Product description	
6008100003	TOLEDOSENS_30W_LED_2700	TOPE LED FLOODLIGHT 30W, 185x205mm	
Nominal wattage	30.0W	Color temperature	4000K
Nominal Voltage	220-240V	Luminous flux	2480lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	185x205x35mm	Weight	1,3kg

Article	Model	Product description	
6008100004	TOLEDOSENS_50W_LED_4500	TOPE LED FLOODLIGHT 50W, 210x215mm	
Nominal wattage	50.0W	Color temperature	4000K
Nominal Voltage	220-240V	Luminous flux	4040lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	210x215x35x35mm	Weight	1,8kg

Article	Model	Product description	
6008100020	TOLEDOSENS_70W_LED_4501	TOPE LED FLOODLIGHT 70W, 240x165mm	
Nominal wattage	70.0W	Color temperature	4000K
Nominal Voltage	220-240V	Luminous flux	6078lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	240x165x35mm	Weight	1kg

Article	Model	Product description	
6008100021	TOLEDOSENS_100W_LED_4502	TOPE LED FLOODLIGHT 100W, 280x192mm	
Nominal wattage	100.0W	Color temperature	4000K
Nominal Voltage	220-240V	Luminous flux	8764lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	280x192x35mm	Weight	1,4kg