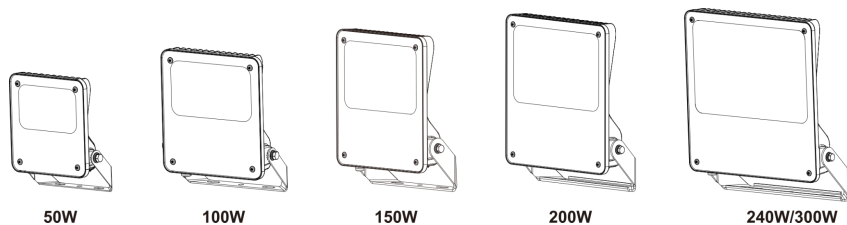


AREA

VALONHEITIN | FLOODLIGHT | STRÅLKASTARE

220 - 240 V ~ 50/60HZ

Tc : -30°C - +50°C

**FI**

Tämä tuote sisältää energiatehokkuusluokan D valonlähteen.

Valaisimen saa asentaa vain sähköalan ammattilainen. Käytä ainoastaan syöttöjännitettä ja taajuutta, joka on merkitty valaisimeen / liitäntälaitteeseen. Kytke virta pois päältä ennen asennusta tai huoltoa. Tämä asennusohje on säilytettävä ja sen on oltava käytössä asennuksessa ja huollossa. Tämän valaisimen valonlähde ei ole vaihdettavissa. Kun valaisin rikkoutuu se on poistettava käytöstä.

EN


This product contains an energy efficiency class D light source.

The luminaire may only be installed by an electrician. Use only the supply voltage and frequency marked on the luminaire / ballast. Turn off the power before installation or maintenance. These installation instructions must be kept and used during installation and maintenance. The light source of luminaire can not be replaced.

SWE

Denna produkt innehåller en ljuskälla av energieffektivitetsklass D.

Armaturen får endast installeras av elektriker. Använd endast matningsspänningen och frekvensen markerade på armaturen/donet. Stäng av strömmen före installation eller underhåll. Dessa installationsanvisningar måste förvaras och användas under installation och underhåll. Ljuskällan för denna lampa kan inte bytas.

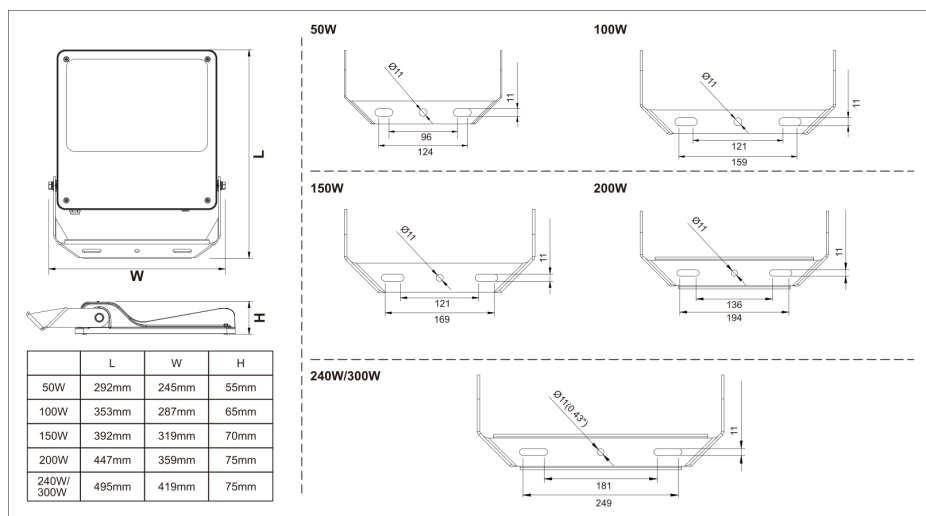

JOHDONSUOJATAULUKKO / CIRCUIT BREAKER / STRÖMBRYTARE


Teho (W)	B10	C10	B16	C16	B20	C20
50	11	18	18	30	22	37
100	11	14	18	22	22	28
150	9	9	14	15	17	18
200	6	7	9	11	12	14
240	2	4	3	6	4	8
300	2	3	3	5	4	6

AREA





Installation





Recommended screw size: M10

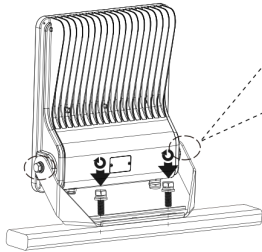

Rotatable angle

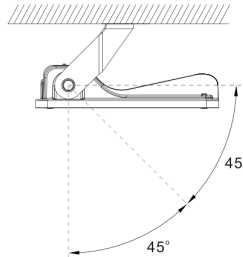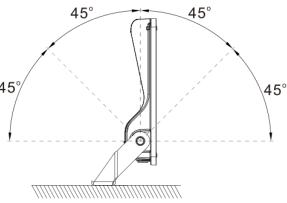

Adaptor Mounting(Optional)

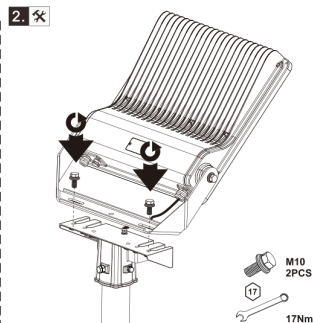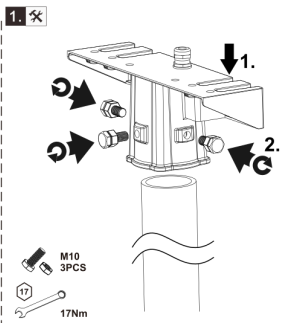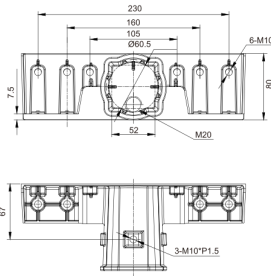

Dimmable			
DIM+/DA1	purple	or	purple
DIM-/DA2	gray	or	pink
Aux 12Vdc +	pink	or	black/white
DIM+/DA1	purple	or	purple
DIM-/DA2	gray	or	pink
Aux 12Vdc +	pink	or	black/white
Aux 12Vdc -	black/white	or	orange
L	brown	or	black
N	blue	or	white
⊕GND	yellow/green	or	green
DIM+/DA1	black	or	red
DIM-/DA2	gray	or	orange
		or	blue



Warning! do not wire dim cord to high voltage, or dim function will fail.

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- For type Y attachments: if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

