
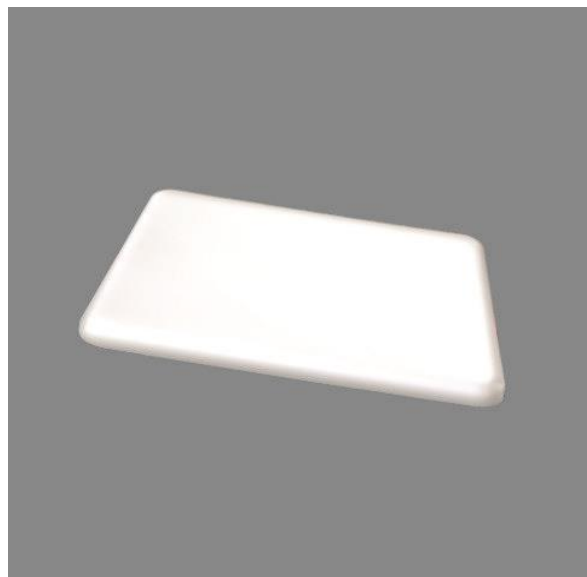


<b>RONDA SQUARE LED PANEL FAMILY DATASHEET</b>	<b>IP65</b>	<b>IK08</b>	<input type="checkbox"/>	<b>TOPE</b> 
--	-------------	-------------	--------------------------	---

#### RONDA PRO

A recessed/surface/suspended edge lit LED luminaire with a slim 9mm no frame profile. Electronic, fixed output gear. IP65 environmental degree, IK08. Driver IP20, IK03. Body: aluminum white painted (RAL9016). Diffuser: UV-stabilised, PRO-LINE prismatic polycarbonate (PC). Electrical connection via push wire terminal blocks Complete with 3000K LED.



Luminaire efficiency: 74-77 lm/W

Light source: LED

Color rendering index min.: >80

Correlated colour temperature: 3000 Kelvin


Rated median useful life: 50000 L70 25°C

Rated output: Fixed output

#### TECHNICAL DATA

Article	Model	Product description	
6003000037	RONDA80_S_8W_LED_530	TOPE LED PANEL 8W, 100x100x20mm	
Nominal wattage	8W	Color temperature	3000K
Nominal Voltage	220-240V	Luminous flux	533 lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	100x100x20mm	Weight	0,2g

Article	Model	Product description	
6003000038	RONDA80_S_15W_LED_1000	TOPE LED PANEL 15W, 155x155x20mm	
Nominal wattage	15W	Color temperature	3000K
Nominal Voltage	220-240V	Luminous flux	998 lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	155x155x20mm	Weight	0.4kg

<b>RONDA SQUARE LED PANEL FAMILY DATASHEET</b>	<b>IP65</b>	<b>IK08</b>	<input type="checkbox"/>	<b>TOPE</b> 
--	-------------	-------------	--------------------------	---

Article	Model	Product description	
6003000039	RONDA80_S_22W_LED_1520	TOPE LED PANEL 22W, 185x185x20mm	
Nominal wattage	22W	Color temperature	3000K
Nominal Voltage	220-240V	Luminous flux	1515 lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	185x185x20mm	Weight	0,6kg

Article	Model	Product description	
6003000040	RONDA80_S_30W_LED_2050	TOPE LED PANEL 30W, 215x215x20mm	
Nominal wattage	30W	Color temperature	3000K
Nominal Voltage	220-240V	Luminous flux	2051 lm
Power factor	0.90	CRI	80
Frequency	50/60Hz	Dimming	Not dimmable
Dimencions	215x215x20mm	Weight	0,7