

„MORA“ LED CEILING LIGHT

White color

Model No: MORA95_SU_W_40W_LED_3800 Article: 6004000029

Model No: MORA95_SU_W_60W_LED_5700 Article: 6004000030

Model No: MORA95_SU_W_70W_LED_6650 Article: 6004000031



Black color

Model No: MORA95_SU_B_40W_LED_3800 Article: 6004000032

Model No: MORA95_SU_B_60W_LED_5700 Article: 6004000033

Model No: MORA95_SU_B_70W_LED_6650 Article: 6004000034



EN

Instalation & Operating Instruction

1. Designated Use

- MORA LED panels are an indoor use luminaire. Can be fixed stright to the ceiling or hanging on the wire.
- Suitable for a wide range of locations: offices, living rooms, corridors, staircases, bars and restorants etc.

⚠ WARNING

2. Basic Safety Instruction

Danger of death through electric shock

- Must only be installed by qualified electricians.
- Conforms to the latest EC directives.
- Designed for use in normal environments.

IMPORTANT


Switch off the electricity at the fuse box by removing the relevant fuse or switching off the circuit breaker before proceeding with the installation

3. Instalation Procedure:

1. Take out acrylic difuser




2. through the center of the intermediate thread the cords

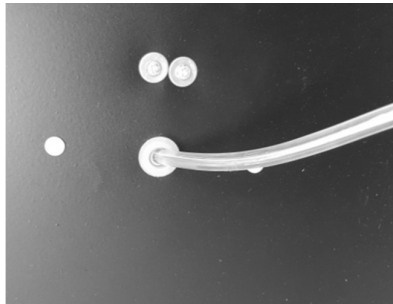


3. Connect cord to the terminal N – Neutral and L-Live




4. through small holes in the fixture, thread the wires

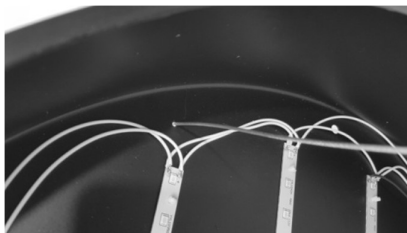


5. To the base of lamp holder screw and tighten 3 wire holders

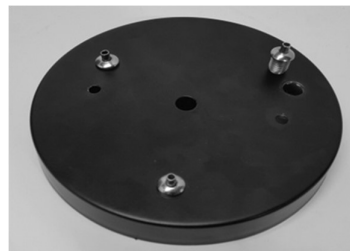

6. Press the wire holder and put inside the wires




7. Aline all the wires, tie a knot on it and tighten.

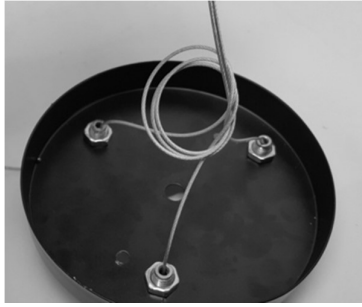


8. Take I profile, put two screws in it and screw profile to the ceiling.



9. Connect base of the lamp holder to I profile



10. With the switch inside, turn on the luminaire, and choose color temperature from 3000 to 4000K

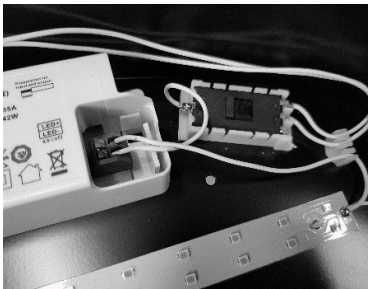

Technical specification

Energy Efficiency	Class A+
Power Supply	220-240V 50Hz
Power Factor	>0.90
Colour Temperature	3000 - 4000K
Colour Rendering Index	>80
Lumen Output Initial	MORA95_SU_W_40W_LED_3800; MORA95_SU_B_40W_LED_3800 - 3798 lm MORA95_SU_W_60W_LED_5700; MORA95_SU_B_60W_LED_5700 - 5712 lm MORA95_SU_W_70W_LED_6650; MORA95_SU_B_70W_LED_6650 - 6637 lm
Lamp beam angle	120 degrees
Environmental Protection	IP20 (suitable for indoor)
EC Directives	Conforms to current EC Directives
Warranty	36 Months