


Outdoor Facade Updown









	EAN	L x W x H	W	lm	lm/W	K	IP	IK
Outdoor Facade Updown 12W/3000K GY IP54	4058075075054	55x90x160	12	700	60	3000K	54	06
Outdoor Facade Updown 12W/3000K WT IP54	4058075075078	55x90x160	12	700	60	3000K	54	06






	EAN		 (°C)	PF	R _a	V _{AC}	Hz	
Outdoor Facade Updown 12W/3000K GY IP54	4058075075054	280°	-20...40	≥ 0.5	> 80	220-240V	50/60Hz	0.5 kg
Outdoor Facade Updown 12W/3000K WT IP54	4058075075078	280°	-20...40	≥ 0.5	> 80	220-240V	50/60Hz	0.5 kg



Outdoor Facade Updown

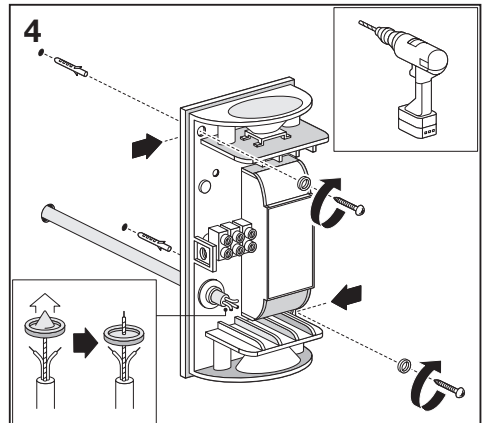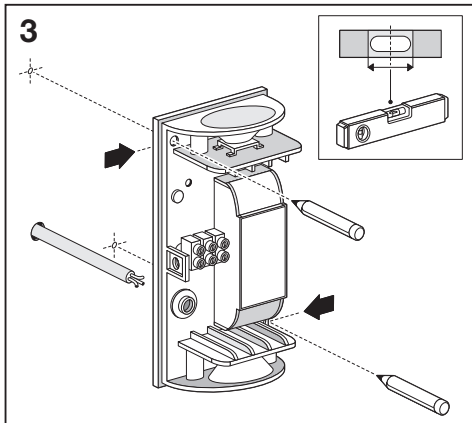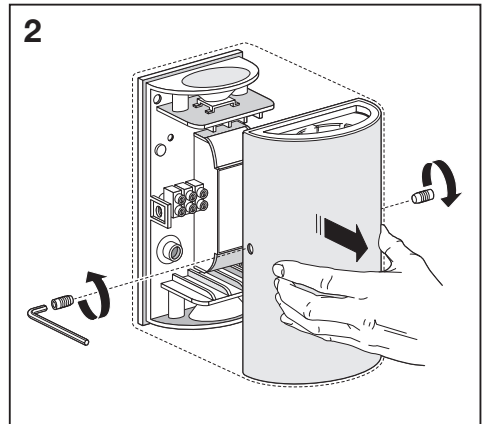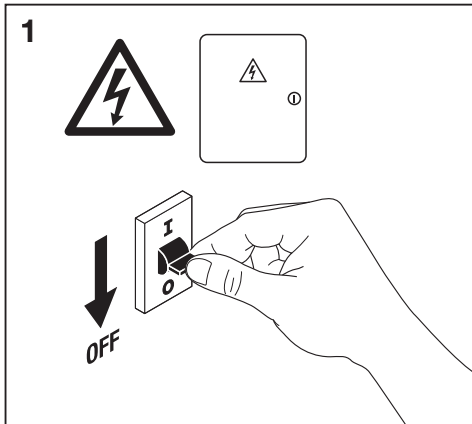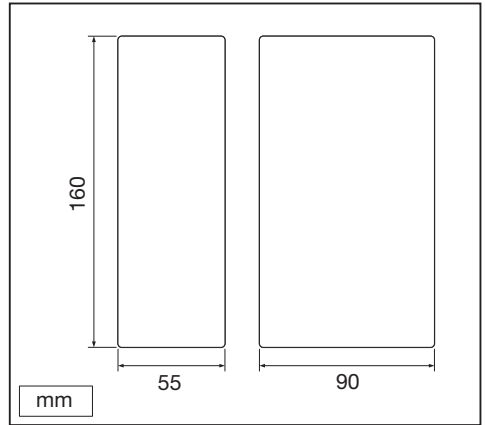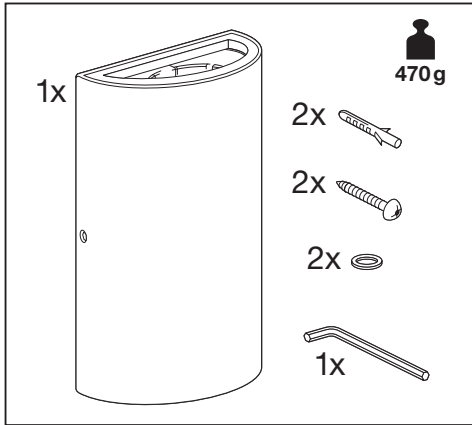

Outdoor Facade Updown

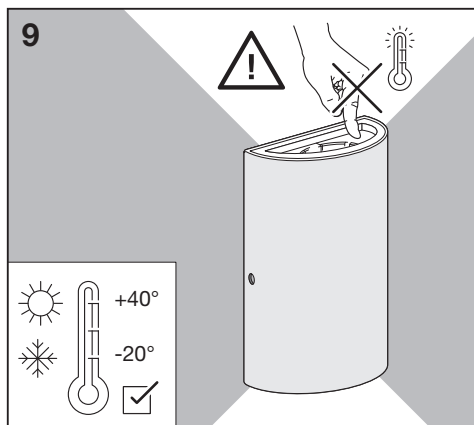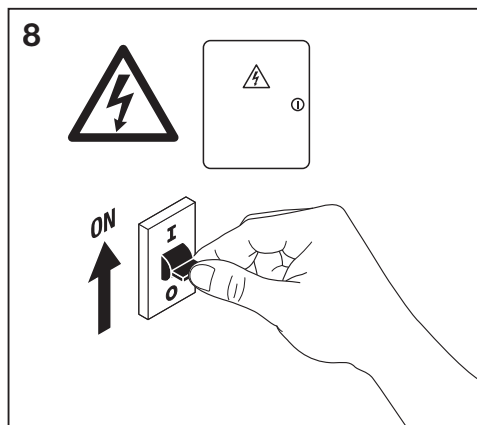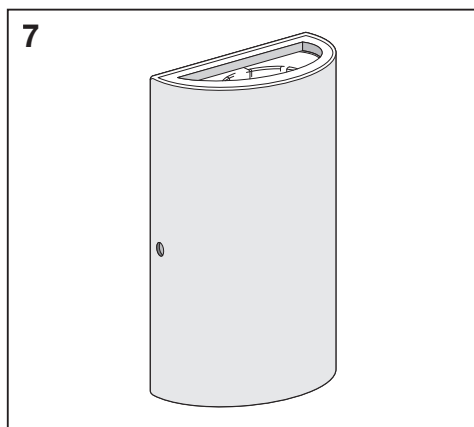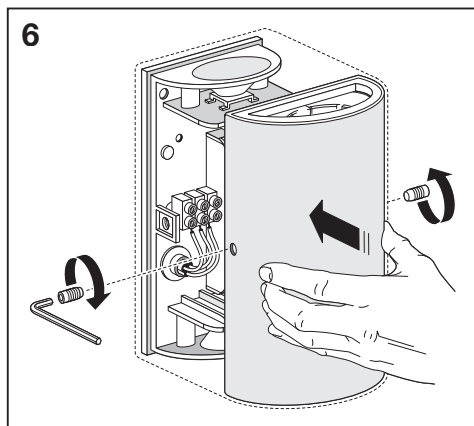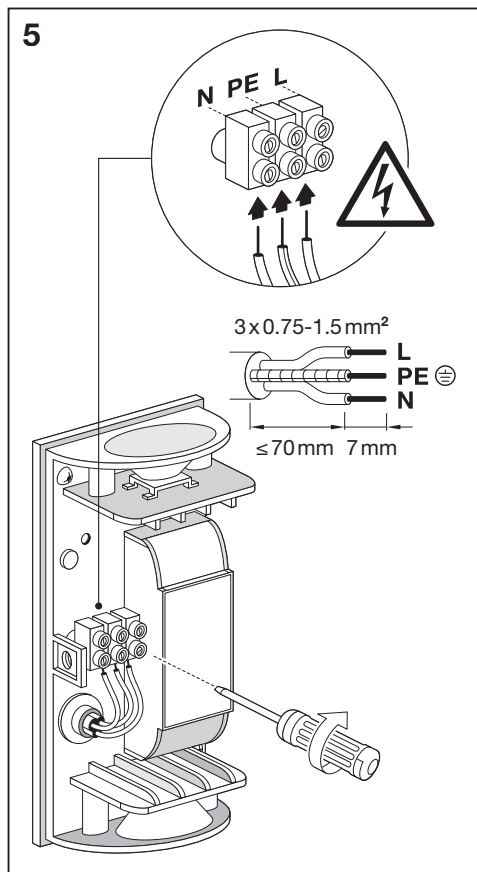

www.luminaires.ledvance.com



Downlight



Spot



Linear



Panel



Surface



DampProof



HighBay



Floodlight



C10449057
G11027764
25.10.17

LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg
Germany
www.ledvance.com