

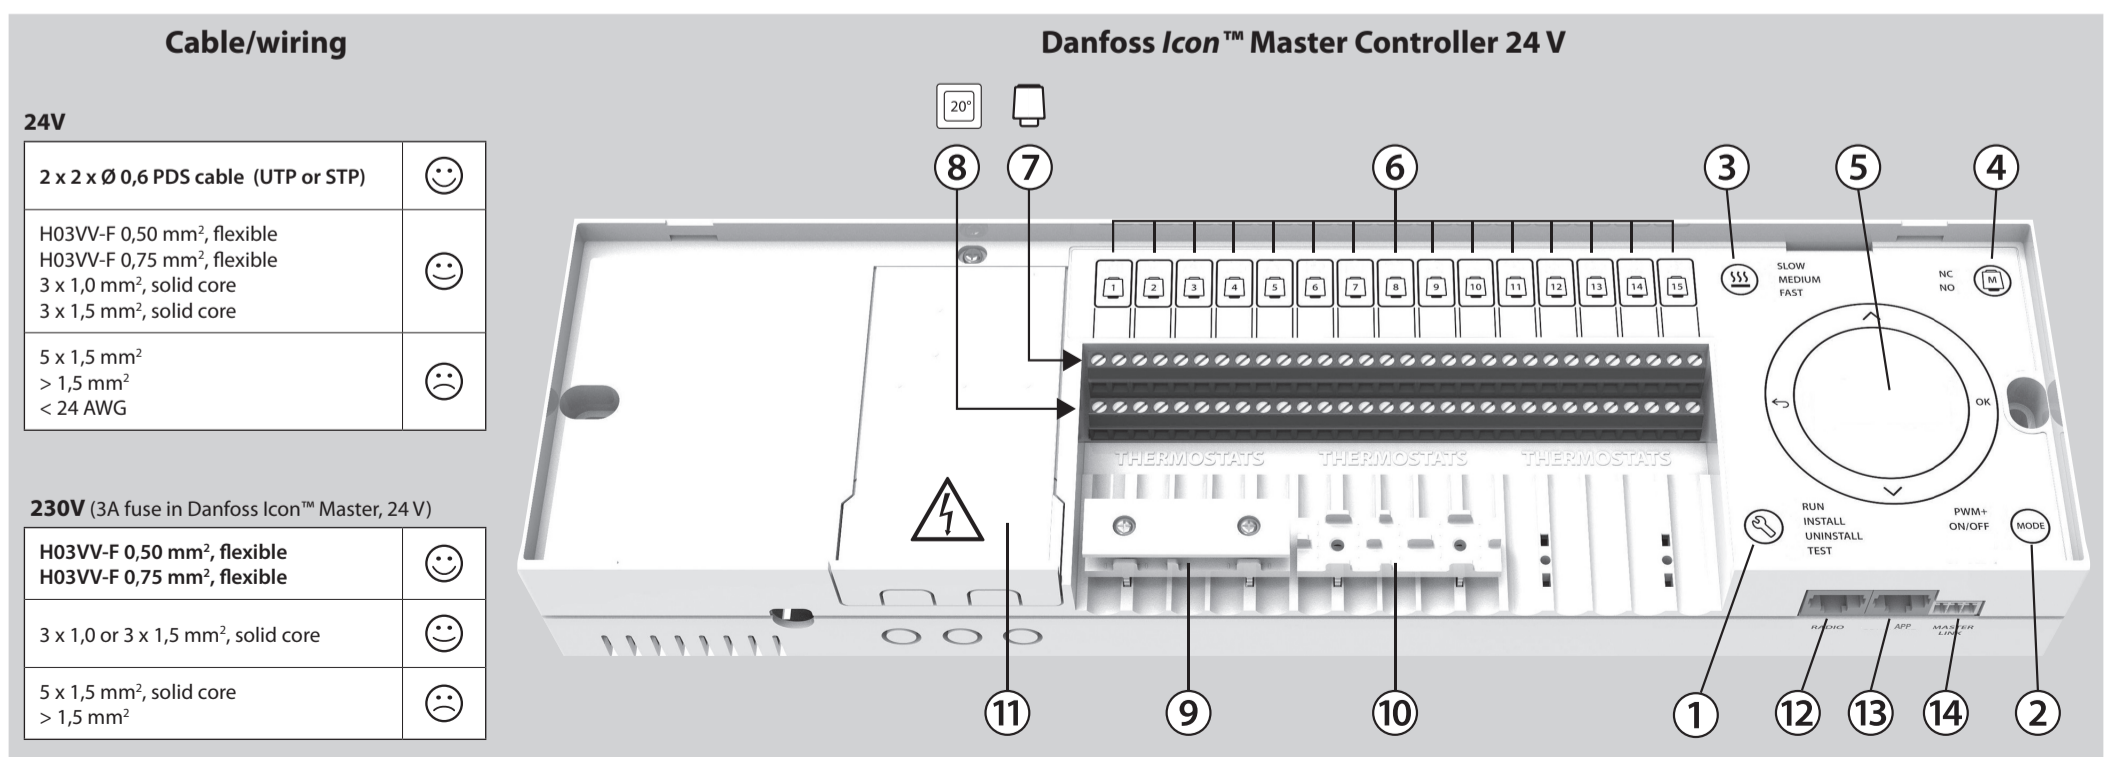
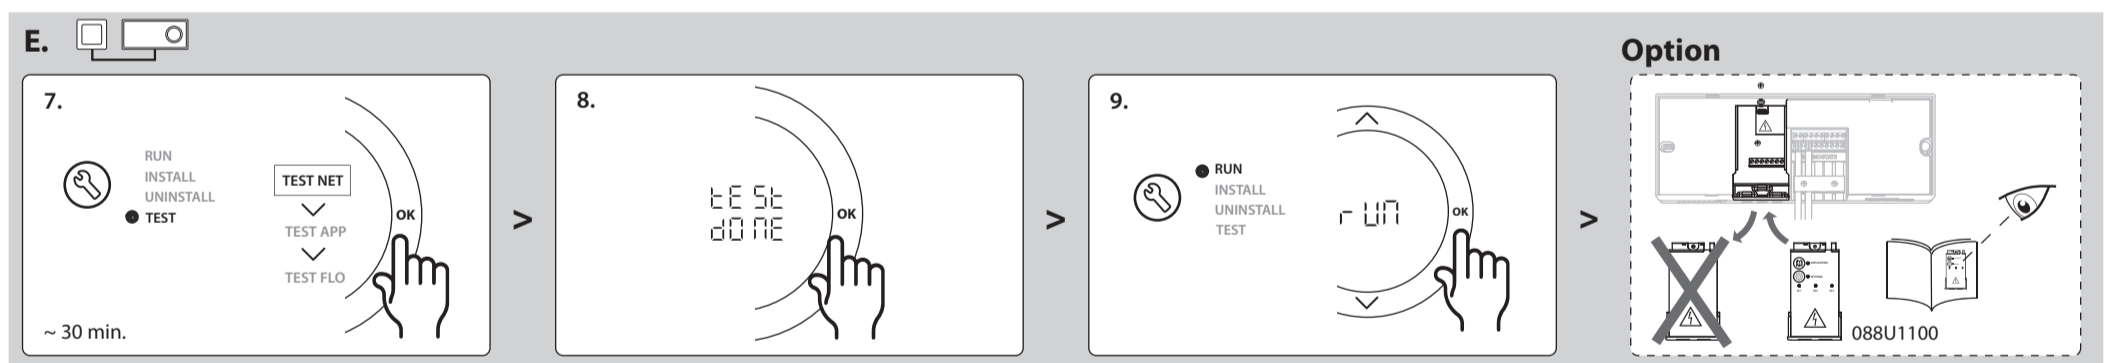
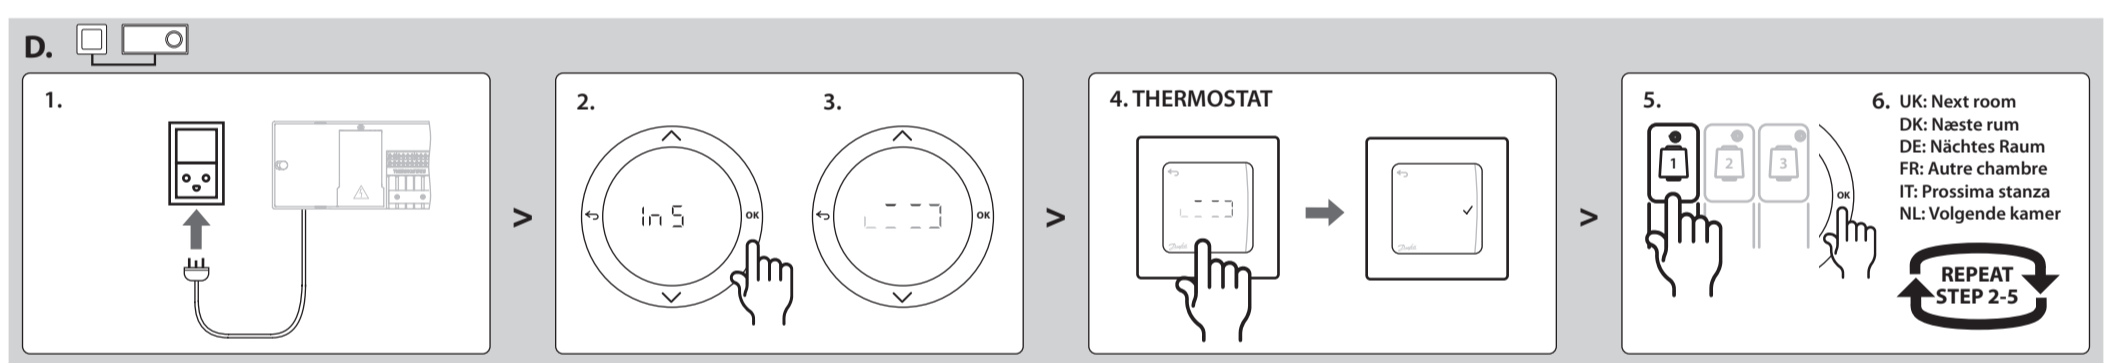
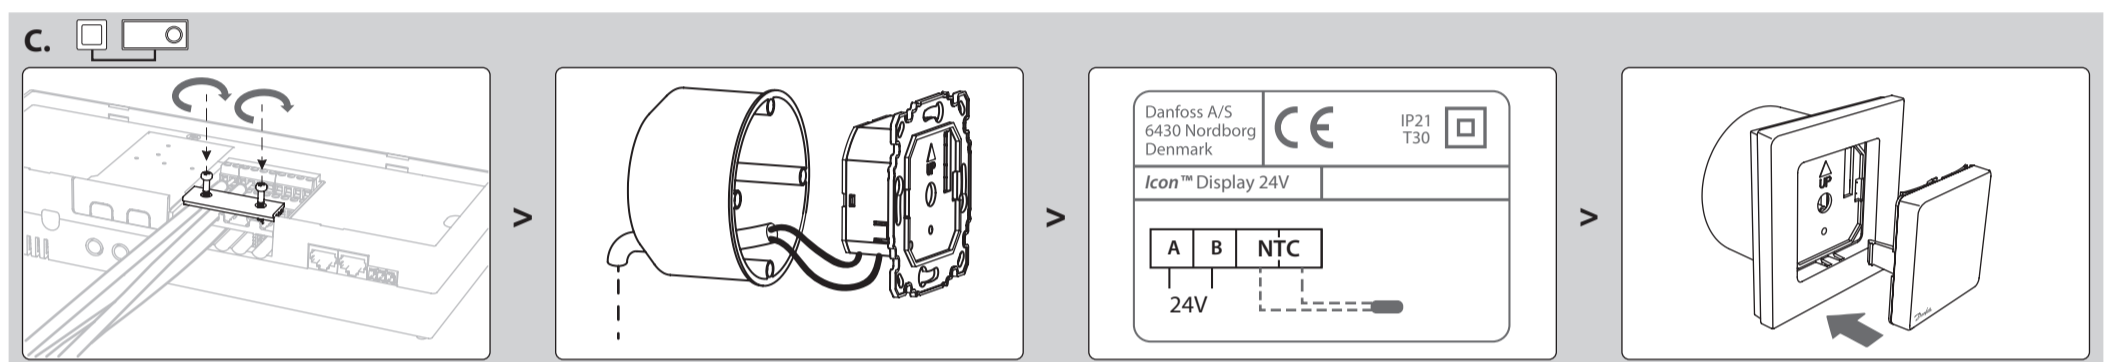


Wired System

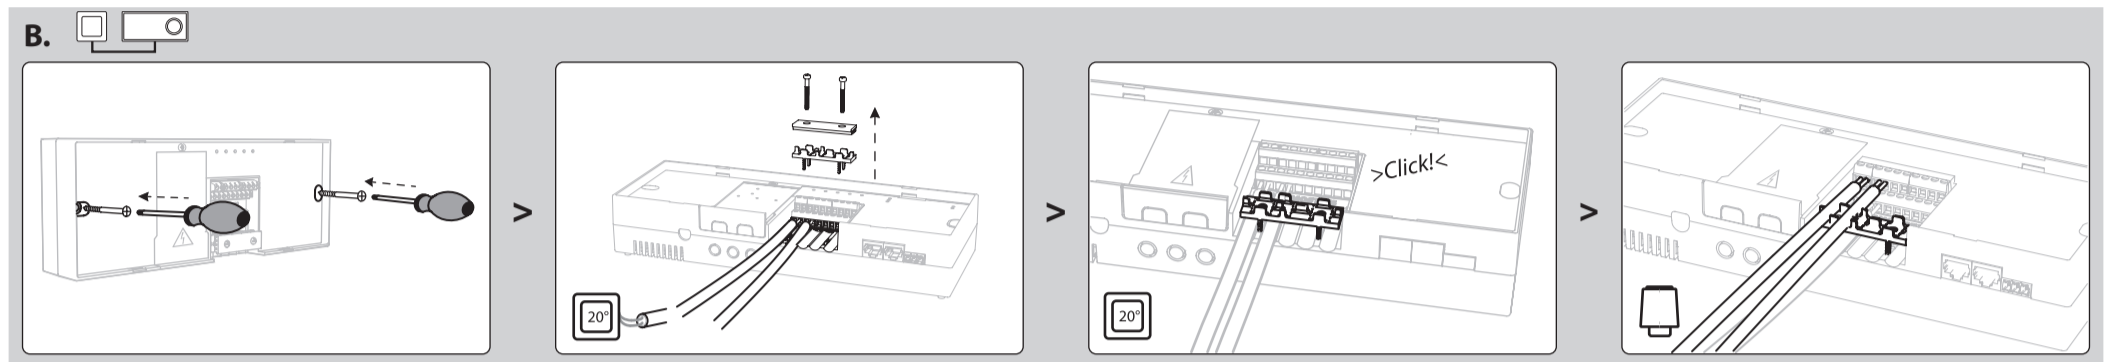

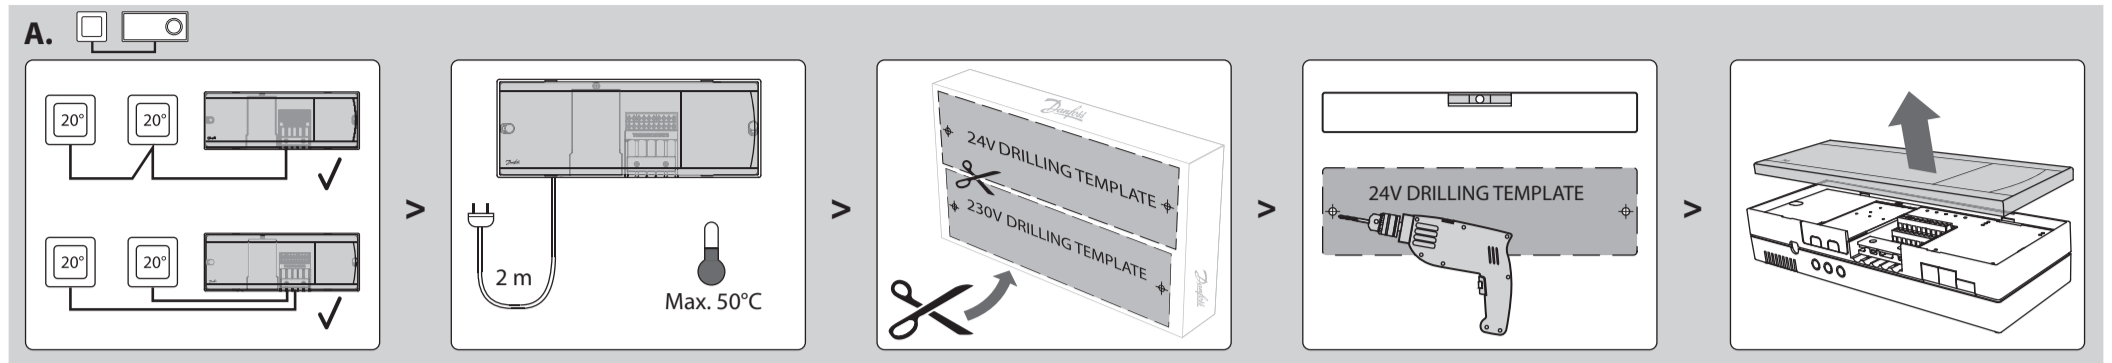

A.)))

B.)))

C.)))

D.)))

E.)))

Option

Cable/wiring

Danfoss Icon™ Master Controller 24 V

230V (3A fuse in Danfoss Icon™ Master, 24 V)	☹️
H03VV-F 0,50 mm ² , flexible	☺️
H03VV-F 0,75 mm ² , flexible	☺️
3 x 1,0 or 3 x 1,5 mm ² , solid core	☺️
5 x 1,5 mm ² , solid core	☹️
> 1,5 mm ²	☹️