


- 开启角度:
- 铰杯厚度:
- 铰杯直径:
- 面板 (K) 尺寸:
- 门板可用厚度:

- 95/105度
- 11.5毫米
- 35毫米
- 3—7毫米
- 14—22毫米






- Opening Degree:
- Thickness of hinge cup:
- Diameter of hinge cup:
- Dimension of door (K):
- Range for door thickness:

- 95/105°
- 11.5mm
- 35mm
- 3-7mm
- 14-22mm

Ø35mm铰杯种类 (Hing cup types)

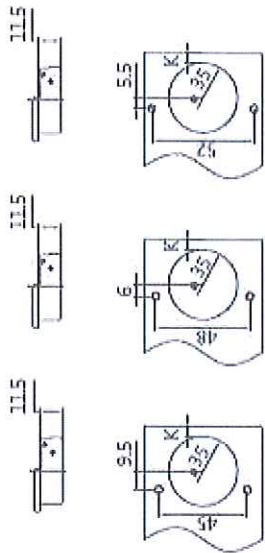

Ø35mm铰杯可配螺丝种类 Options of screws and dowels

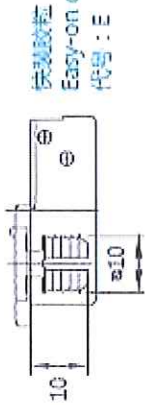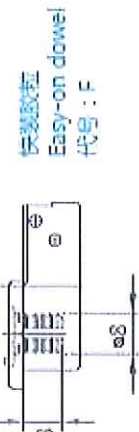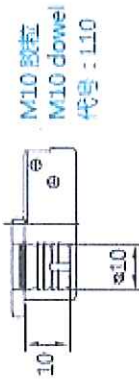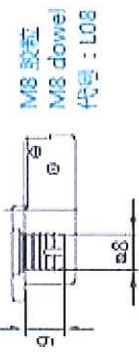


利用以下公式决定铰链臂的种类，解决问题时，必需有门身钻孔“K”及安装板高度“H”的数值。


Below formulas can be used according to different types of arm of hinges, and need the figures of both drilling holes “K” on the door and the height of assembling panel “H” when solving problem.

$$H=14+K-D$$


D	K	3	4	5	6	7
H	0	17	18	19	20	21
	2	15	16	17	18	19
	4	13	14	15	16	17

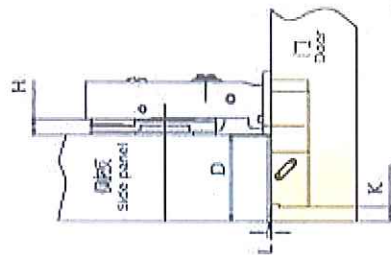

铰臂
Full overlay

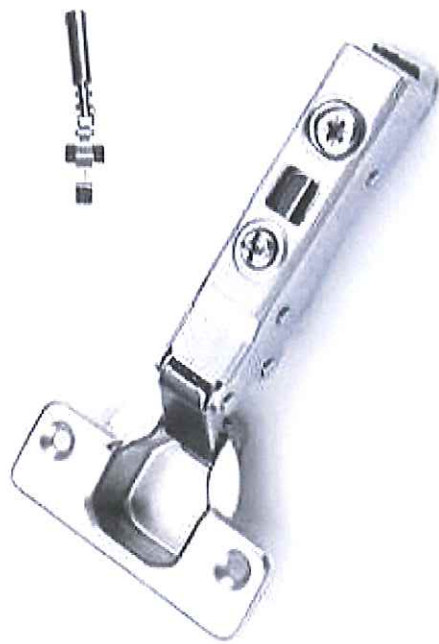

H1

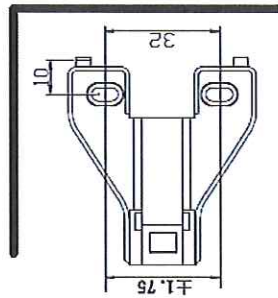

高度H	订货号 Item No.	木螺丝 Wood screw hole	欧式螺丝 Euro. screw hole	桥式螺丝 Bridge screw hole
H=0		H1 04		
H=3		H1 34		
H=6		H1 64		