



80 W Maximum Power

High Efficiency Monocrystalline Solar Module

BENEFITS

- High and stable conversion efficiency based on over 15 years professional experience
- High reliability with guaranteed 0+3 % output power tolerance
- Proven materials, tempered front glass and a sturdy anodized aluminum frame allow modules to operate reliably in multiple mountly configuration
- Combination of high efficiency and attractive appearance

QUALITY AND SAFETY

- 12 years product warranty,25 years output power warranty
- ISO9001: 2008 (Quality Management System) certified factory
- IEC 61215, Safety tested IEC 61730, CE
- Product Liability Insurance guarantee end users' benefit
- Hail impact: 277 g steel ball falling from 1 m height, 60 m/s wind speed
increased snow load according to IEC 61215: up to 5400 N/m²
wind load and suction according to IEC 61215: up to 2400 N/m²

SunLink PV Technology Co.,Ltd.

Nanyuan Road, Zhangjiagang Economic Development
Zone, Jiangsu, China 215600

Tel:+86-512-58166568

Fax:+86-512-58166560

www.sunlink-pv.com





Temperature Coefficients

NOCT	45 +/-2 °C
Voltage temperature coefficient(Voc)	-0.29%/°C
Current temperature coefficient(Isc)	+0.05%/ °C
Power temperature coefficient(Pmpp)	-0.39%/°C
Minimum power tolerance	0-+3%

NOCT:Nominal Operating cell Temperature:-40°C to +85°C



Mechanical Data

Solar Cell	36(4*9)Mono-crystalline 156.75×69.66mm 5BB
Front Glass	3.2mm High Transmission,Low Iron, Tempered ARC Glass
Junction Box	IP67 Rated
Frame	Anodized Aluminium Alloy type 6063T5
Weight	5.1Kg
Dimension	690x670x30mm

Electrical Data

Module Type	SL 080-12M
Nominal peak power(Wp)	80W
Nominal voltage(Vmp)	18.6V
Nominal current(Imp)	4.31A
Open circuit voltage(Voc)	22.8V
Short circuit current(Isc)	4.62A
Module efficiency	17.3%
Operating Temperatere	-40 to +85°C
Maximum System Voltage	1000V DC

STC:1000W/m², 25°C, AM=1.5

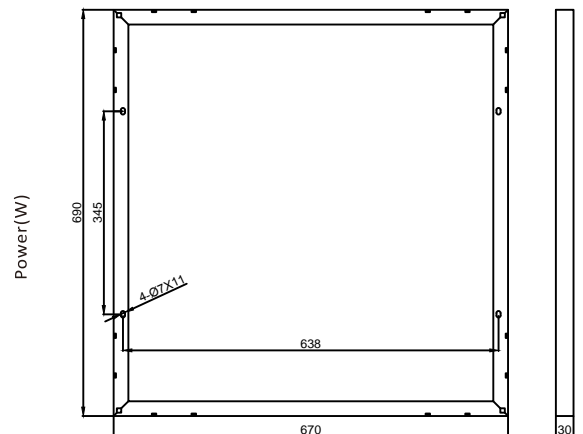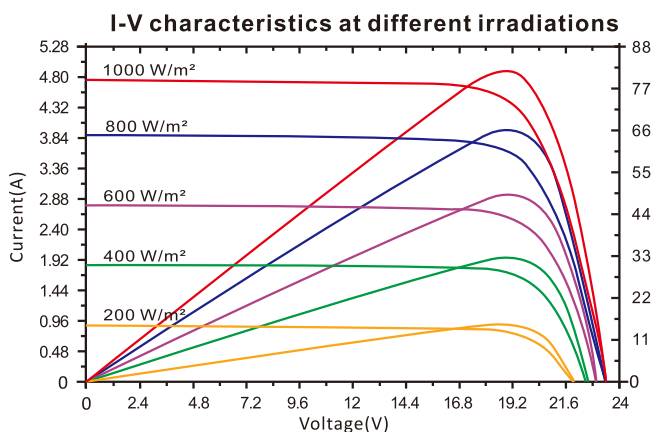

CAUTION:Read Safety And Installation.Instructions Before Using The Product. Go to www.sunlink-pv.com

© January 2010 SunLink PV Co.,Ltd. All rights reserved. Sepcifications included in this datasheet are subject to change without notice

 Printed on recycled paper.