



# ITECH C1 302 M ST

TM-IT.C1.ST004




## PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	escape route lighting
IP	IP65
IK	IK06
Version	ST – for button test
Power supply	210÷250 V AC 50÷60 Hz
Temperature range	10-40 °C
Material	PC
Colour	white
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	6.4 W
Insulation class	2
Luminous flux	238 lm
Battery	LiFePO4/C 6.4V 1.5Ah



## PHOTOMETRY

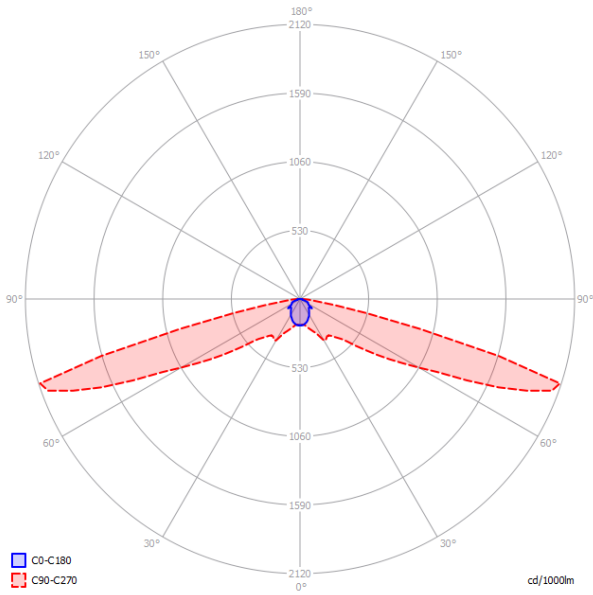

### Ceiling height

2,5  
3,0  
4,0  
5,0  
6,0  
7,0  
8,0  
9,0  
10,0

### Distance wall - fitting

8,6  
9,6  
11,0  
9,2  
4,5  
3,5

### Distance fitting - fitting

19,2  
22,0  
26,5  
29,5  
27,5  
22,0

