
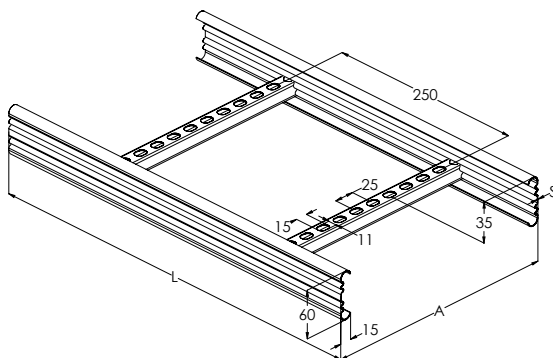



## CABLE LADDER KS20 PG HDG

Multipurpose cable ladders KS20 are suitable for medium loading capacities. Open, C-shaped side profiles enable use of interior supports and -joints.

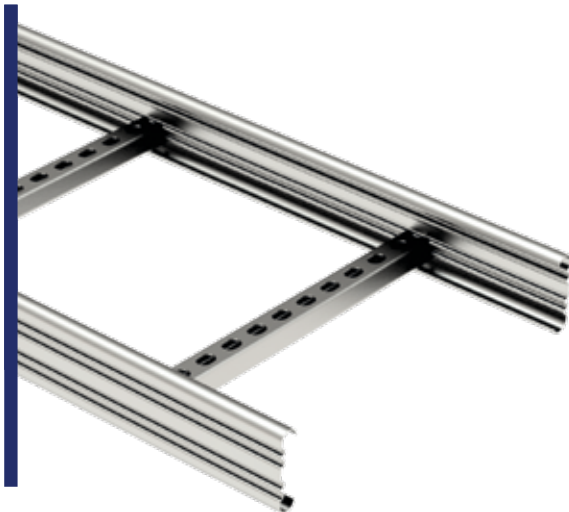


| CODE    | PRODUCT<br>x = stock product | WGT.<br>kg / pc | A<br>mm | S<br>mm | L<br>mm | PACKAGE         |
|---------|------------------------------|-----------------|---------|---------|---------|-----------------|
| 1449401 | x KS20-200 L=3000 PG         | 5.72            | 200     | 1       | 3000    | 10 PCE / 30 MTR |
| 1449402 | x KS20-300 L=3000 PG         | 6.2             | 300     | 1       | 3000    | 10 PCE / 30 MTR |
| 1449403 | KS20-400 L=3000 PG           | 6.72            | 400     | 1       | 3000    | 10 PCE / 30 MTR |
| 1449404 | KS20-500 L=3000 PG           | 6.89            | 500     | 1       | 3000    | 10 PCE / 30 MTR |
| 1449405 | KS20-600 L=3000 PG           | 7.98            | 600     | 1       | 3000    | 10 PCE / 30 MTR |
| 1449502 | x KS20-200 L=6000 PG         | 11.25           | 200     | 1       | 6000    | 10 PCE / 60 MTR |
| 1449503 | x KS20-300 L=6000 PG         | 12.13           | 300     | 1       | 6000    | 10 PCE / 60 MTR |
| 1449504 | x KS20-400 L=6000 PG         | 13.08           | 400     | 1       | 6000    | 10 PCE / 60 MTR |
| 1449505 | x KS20-500 L=6000 PG         | 13.78           | 500     | 1       | 6000    | 10 PCE / 60 MTR |
| 1449506 | x KS20-600 L=6000 PG         | 15.42           | 600     | 1       | 6000    | 10 PCE / 60 MTR |

**PG** Manufactured of hot-dip galvanized steel in accordance with standard EN 10346 : C1-C2

| CODE    | PRODUCT<br>x = stock product | WGT.<br>kg / pc | A<br>mm | S<br>mm | L<br>mm | PACKAGE         |
|---------|------------------------------|-----------------|---------|---------|---------|-----------------|
| 1433112 | KS20-200 L=3000 HDG          | 6.46            | 200     | 1       | 3000    | 10 PCE / 30 MTR |
| 1433113 | KS20-300 L=3000 HDG          | 7.01            | 300     | 1       | 3000    | 10 PCE / 30 MTR |
| 1433114 | KS20-400 L=3000 HDG          | 7.59            | 400     | 1       | 3000    | 10 PCE / 30 MTR |
| 1433115 | KS20-500 L=3000 HDG          | 8.03            | 500     | 1       | 3000    | 10 PCE / 30 MTR |
| 1433116 | KS20-600 L=3000 HDG          | 9.01            | 600     | 1       | 3000    | 10 PCE / 30 MTR |
| 1433102 | KS20-200 L=6000 HDG          | 12.72           | 200     | 1       | 6000    | 10 PCE / 60 MTR |
| 1433103 | KS20-300 L=6000 HDG          | 13.71           | 300     | 1       | 6000    | 10 PCE / 60 MTR |
| 1433104 | KS20-400 L=6000 HDG          | 14.78           | 400     | 1       | 6000    | 10 PCE / 60 MTR |
| 1433105 | KS20-500 L=6000 HDG          | 15.58           | 500     | 1       | 6000    | 10 PCE / 60 MTR |
| 1433106 | KS20-600 L=6000 HDG          | 17.42           | 600     | 1       | 6000    | 10 PCE / 60 MTR |

**HDG** Hot-dip galvanized after manufacturing in accordance with standard EN ISO 1461 : C1-C4



**KS20**

Compliant with the IEC 61537 standard.

