



Joints SSC are used to extend KS20- and KS60-type cable ladders from inside of the side profiles.

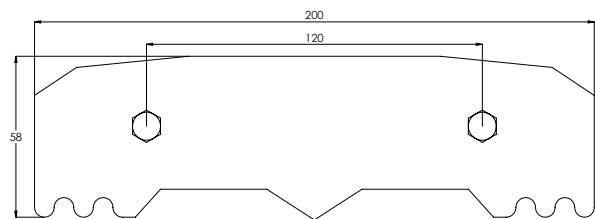

CODE	PRODUCT <small>x = stock product</small>	WGT. kg / pc	PACKAGE
1449481	x SSC PG	0.16	10 PCE
PG	Manufactured of hot-dip galvanized steel in accordance with standard EN 10346 : C1-C2		


CODE	PRODUCT <small>x = stock product</small>	WGT. kg / pc	PACKAGE
1433199	SSC HDG	0.19	10 PCE
HDG	Hot-dip galvanized after manufacturing in accordance with standard EN ISO 1461 : C1-C4		

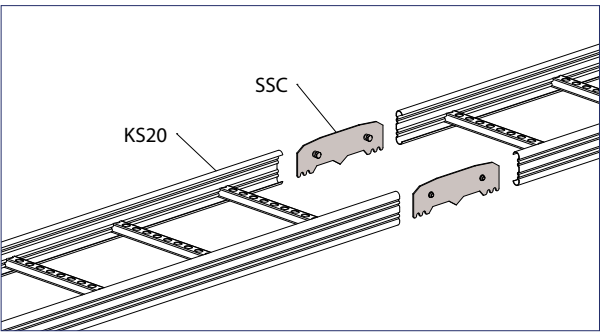


KS20 cable ladders can be attached together with joint SSC.

JOINT SSA HDG

Joints SSA keep KSF80 ladders side profiles at place and reinforce the extensions. Joints SSA can be put inside the ladder side profile.

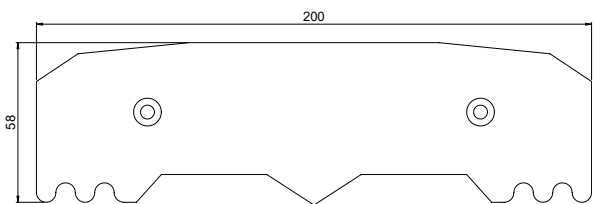

CODE	PRODUCT <small>x = stock product</small>	WGT. kg / pc	PACKAGE
1449655	SSA HDG	0.17	10 PCE
HDG	Hot-dip galvanized after manufacturing in accordance with standard EN ISO 1461 : C1-C4		

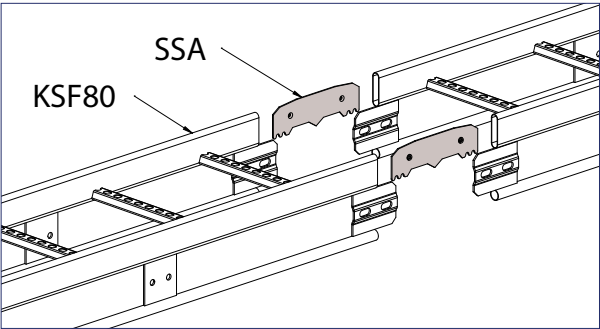

Joint SSA is a reinforcing piece for cable ladder KS80 and KSF80 joints.