





WIRE MESH TRAY WMT-50

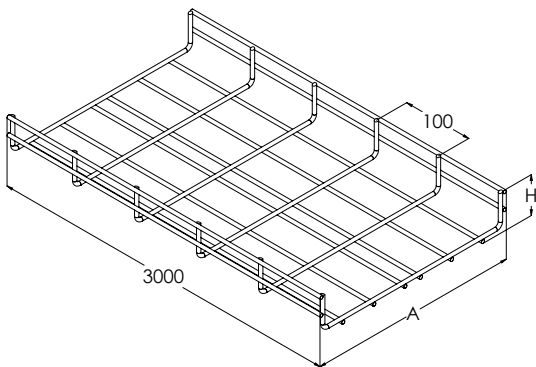


50 mm height wire mesh trays. Wire mesh trays are used mainly for lower load capacities, lightweight cables, angular lines or at places with special requirements for ventilation or hygienic e.g. ICT, food industry and renewable energy solutions.

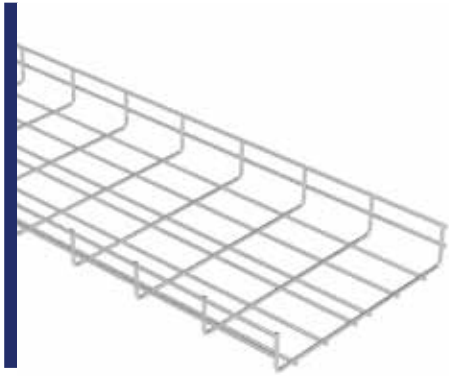

WMT 50 | WIDTHS 70, 100, 200

Compliant with the IEC 61537 standard.

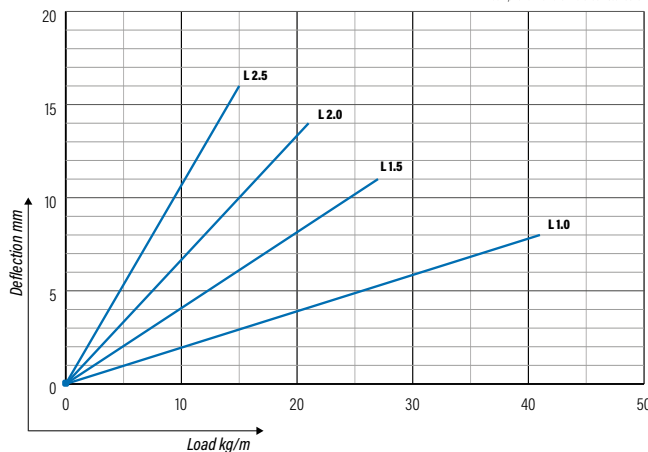

CODE	PRODUCT x = stock product	WGT. kg / pc	A mm	H mm	PACKAGE
1448407	x WMT-50-70 L=3000 EG	2.23	70	53	88 PCE / 264 MTR
1448408	x WMT-50-100 L=3000 EG	2.32	100	53	64 PCE / 192 MTR
1448409	x WMT-50-200 L=3000 EG	3.23	200	53	64 PCE / 192 MTR
1448410	x WMT-50-300 L=3000 EG	6.46	300	57	48 PCE / 144 MTR
1448411	WMT-50-400 L=3000 EG	7.87	400	57	32 PCE / 96 MTR
1448412	WMT-50-500 L=3000 EG	9.29	500	57	32 PCE / 96 MTR
1448413	WMT-50-600 L=3000 EG	10.7	600	57	32 PCE / 96 MTR

EG Electroplated with zinc after manufacturing in accordance with standard EN ISO 2081 : C1-C2

CODE	PRODUCT x = stock product	WGT. kg / pc	A mm	H mm	PACKAGE
1448507	WMT-50-70 L=3000 HDG	2.52	70	53	88 PCE / 264 MTR
1448508	WMT-50-100 L=3000 HDG	2.62	100	53	64 PCE / 192 MTR
1448509	WMT-50-200 L=3000 HDG	3.65	200	53	64 PCE / 192 MTR
1448510	WMT-50-300 L=3000 HDG	7.3	300	57	48 PCE / 144 MTR
1448511	WMT-50-400 L=3000 HDG	8.89	400	57	32 PCE / 96 MTR
1448512	WMT-50-500 L=3000 HDG	10.5	500	57	32 PCE / 96 MTR
1448513	WMT-50-600 L=3000 HDG	12.09	600	57	32 PCE / 96 MTR

HDG Hot-dip galvanized after manufacturing in accordance with standard EN ISO 1461 : C1-C4

CODE	PRODUCT x = stock product	WGT. kg / pc	A mm	H mm	PACKAGE
1448607	x WMT-50-70 L=3000 HST	2.29	70	53	88 PCE / 264 MTR
1448608	WMT-50-100 L=3000 HST	2.38	100	53	64 PCE / 192 MTR
1448609	x WMT-50-200 L=3000 HST	3.31	200	53	64 PCE / 192 MTR
1448610	x WMT-50-300 L=3000 HST	6.63	300	57	48 PCE / 144 MTR
1448611	WMT-50-400 L=3000 HST	8.08	400	57	32 PCE / 96 MTR
1448612	WMT-50-500 L=3000 HST	9.53	500	57	32 PCE / 96 MTR
1448613	WMT-50-600 L=3000 HST	10.98	600	57	32 PCE / 96 MTR

HST Acid-proof steel : C1-CX

WMT 50 | WIDTHS 300, 400, 500, 600

Compliant with the IEC 61537 standard.

