

ToLEDo Performer T-Series

ToLEDo Performer T60 3400LM 840 E27 SL

0028370



Product features

- Direct retrofit replacement for high-pressure mercury vapor lamps (HPMV)
- 50,000 hours average rated lifetime
- Up to 78% energy saving compared to the standard high-pressure mercury vapor lamps
- Mercury-free solution
- Lower maintenance cost
- High lumen efficacy
- Dual operating mode - compatible with HPMV magnetic ballast and also, suitable for AC direct mains 120-240V operation
- High surge voltage protection: 4kV
- Suitable for both open and enclosed luminaires
- Wide light distribution
- High switching cycles - 200,000X
- High colour rendering - CRI80
- Minimum and maximum operating temperature: -30°C to 50°C



PRODUCT OVERVIEW

Product name	ToLEDo Performer T60 3400LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	27
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC001959
E-number FI	4740739
Warranty	5 years
Luminous flux (lm)	3400
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Wattage (W)	27
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	50000
Product EAN number	5410288283708

DATA TABLE

General data

Product name	ToLEDo Performer T60 3400LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	27
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Logistics & Industry
Operating temperature range (°C)	-20°C - 50°C
Performance ambient temperature Tq (°C)	25

ToLEDo Performer T-Series

ToLEDo Performer T60 3400LM 840 E27 SL
0028370

ETIM Class	EC001959
E-number FI	4740739
Warranty	5 years

Optical data

Luminous flux (lm)	3400
Luminous flux (Rated) (lm)	3400
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	27
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	0.5
Product Voltage (V)	230
Lamp power factor	0.95
Control gear required	No
No. Of switching cycles before premature failures	>200000
Transformer required	No
Dimmable	No
Inrush Current (A)	79.6
Inrush Duration (µs)	2
Lamp Energy Label (class)	E
kWh per 1000 hours burning time	27
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	53

Lifetime data

Lifespan L70 B50	50000
Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

Physical data

Nominal Product Length (mm)	175
Nominal Product Diameter (mm)	60
Weight (kg)	0.31

Packaging

Single packaging type	Carton
Product EAN number	5410288283708
Packaging single length / height (cm)	22.5
Packaging single width (cm)	7.2
Packaging single depth (cm)	7.2

ToLEDo Performer T-Series



ToLEDo Performer T60 3400LM 840 E27 SL
0028370

DUN14 (outer)	15410288283705
Units per outer package	6
Packaging outer length / height (cm)	23.0
Packaging outer width (cm)	16.0
Packaging outer depth (cm)	24.0


Safety data

Optimal operating condition (°C)	-20-50
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

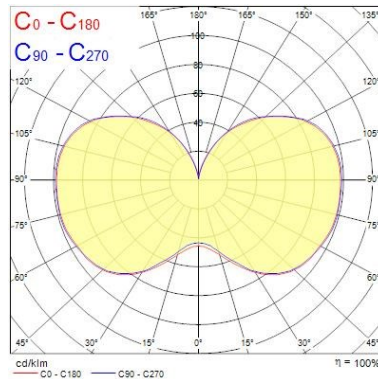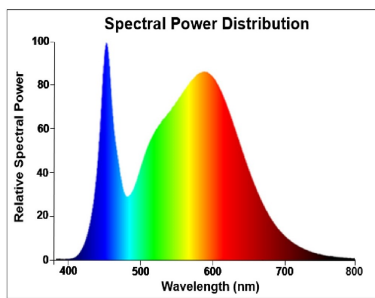

TECHNICAL DRAWINGS



SYLVANIA


ToLEDo Performer T-Series

ToLEDo Performer T60 3400LM 840 E27 SL
0028370



SYLVANIA

0028370

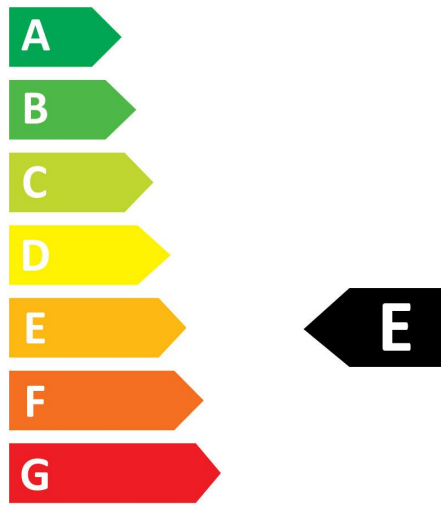

27
kWh/1000h




2019/2015

SYLVANIA

ToLEDo Performer T-Series
ToLEDo Performer T60 3400LM 840 E27 SL
0028370



0028370

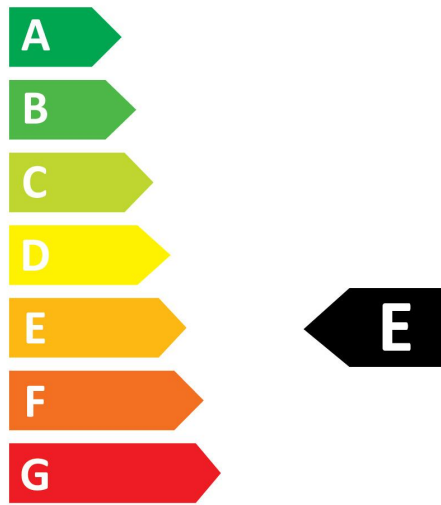

27
kWh/1000h



2019/2015