


## UAP432 Universal battery-powered hydraulic pressing tool 32 kN





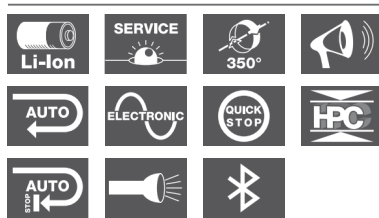


### Technical data

Linear force	32 kN
Weight	4.4 kg
Dimensions	530 x 76 x 325 mm
Ambient temperature	-10 °C up to 40 °C
Battery	18 V, Li-Ion
Battery charger	230 V (110 V on request)
Number of pressings	Approx. 400 (NS 20 / 4.0 Ah battery)
Pressing jaw holder	rotates 350°
Bluetooth	•
Realtime clock	•
OLED display	•
Hydraulic Pressure Control	•

Item	Part No. <b>Makita</b>	Part No. <b>Bosch</b>	
Battery-powered pressing tool with Makita battery	<b>UAP432CFM</b>		
Battery-powered pressing tool with Bosch battery		<b>UAP432CFB</b>	
Scope of supply			Page
Makita battery 18 V / 4.0 Ah, Li-Ion	<b>RAL40</b>		69
Makita quick-charger 230 V for 18 V Li-Ion batteries	<b>LGL1</b>		71
Bosch battery 18 V / 5.0 Ah Li-Ion		<b>RALB2EU</b>	70
Bosch charger 230 V for 18 V Li-Ion battery		<b>LGLB1EU</b>	71
Plastic case	<b>KKUAP4NGS</b>	<b>KKUAP4NGS</b>	
Accessories			Page
Makita battery 18 V / 5.0 Ah, Li-Ion	<b>RAL4</b>		69
Mains adapter 18 V / 230 V (compatible only with Makita/110 V on request)	<b>NG2</b>		70
Bosch battery 18 V / 5.0 Ah Li-Ion		<b>RALB2EU</b>	70

**suitable for**

SB pressing jaw Standard 32 kN	Page 30
 <ul style="list-style-type: none"> <li>▪ Stainless steel, steel: max. NS 54 mm / 2"</li> <li>▪ Copper, copper alloys: max. NS 54 mm / 2"</li> <li>▪ Multi-layer pipe / PEX pipe: max. NS 50 mm / 2"</li> <li>▪ The stated information is system-dependent</li> </ul>	
UW Universal interchangeable jaw Standard 32 kN	Page 32
 <ul style="list-style-type: none"> <li>▪ Stainless steel, steel: max. NS 22 mm / 3/4"</li> <li>▪ Copper, copper alloys: max. NS 28 mm / 1"</li> <li>▪ Multi-layer pipe / PEX pipe: max. NS 32 mm / 1"</li> <li>▪ The stated information is system-dependent.</li> </ul>	
QC pressing chain Quick-Click 32 kN	Page 36
 <ul style="list-style-type: none"> <li>▪ Can be used only in connection with adapter jaw SBKQC (not included in scope of supply)</li> <li>▪ Stainless steel, steel: max. NS 54 mm / 108 mm / 4"</li> <li>▪ Copper, copper alloys: NS 54 mm / 108 mm / 4"</li> <li>▪ Multi-layer pipe / PEX pipe: max. NS 110 / 4"</li> <li>▪ The stated information is system-dependent.</li> </ul>	
SSK 4-segment pressing chain 32 kN	Page 36
 <ul style="list-style-type: none"> <li>▪ Can be used only in connection with adapter jaw SBKQC (not included in scope of supply)</li> <li>▪ Stainless steel, steel: max. NS 54 mm / 3/4"</li> <li>▪ Copper, copper alloys: max. NS 54 mm / 2"</li> <li>▪ The stated information is system-dependent.</li> </ul>	
BP pressing chain LP (low pressure) 32 kN	Page 37
 <ul style="list-style-type: none"> <li>▪ Can be used only in connection with adapter jaw SBKUAP4 (not included in scope of supply)</li> <li>▪ Stainless steel, steel: max. NS 108 mm / 4"</li> <li>▪ Copper, copper alloys: NS 108 mm / 4"</li> <li>▪ Multi-layer pipe / PEX pipe: max. NS 110 / 4"</li> <li>▪ The stated information is system-dependent.</li> </ul>	



*Possible scope of supply*