


G10449057
G11088689V2
19.04.21

LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com







DAMPPROOF COMPACT IP66

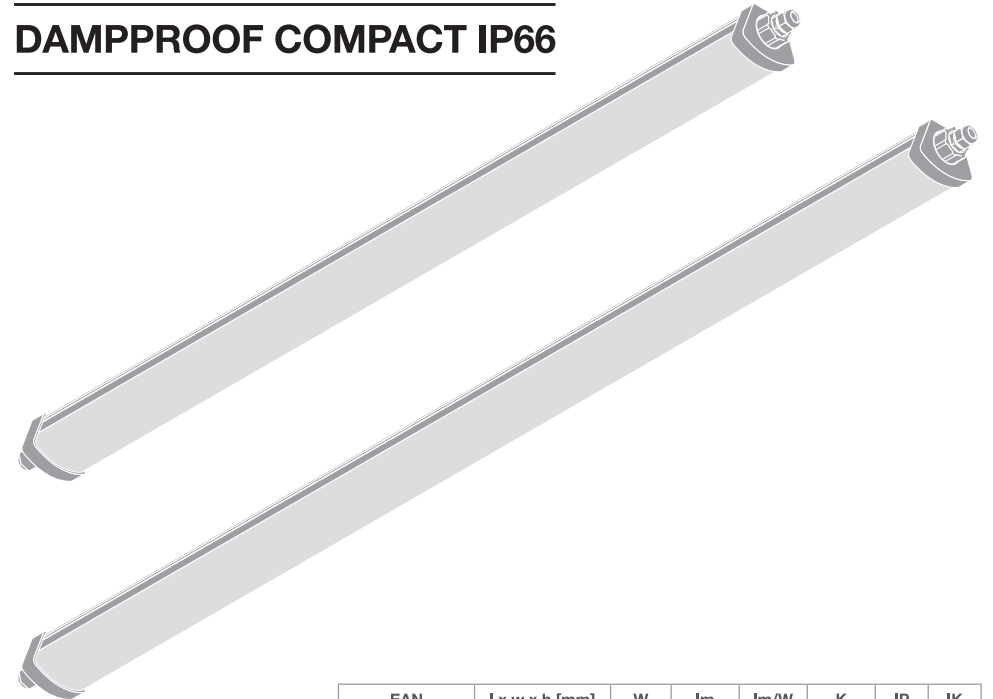

	EAN	l x w x h [mm]	W	lm	lm/W	K	IP	IK
DP COMPACT 1200 23W/3000K GR IP66	4058075424227	1290 x 86 x 68	23	2600	120	3000K	66	08
DP COMPACT 1200 23W/4000K GR IP66	4058075210028	1290 x 86 x 68	23	2800	120	4000K	66	08
DP COMPACT 1200 44W/3000K GR IP66	4058075424241	1290 x 86 x 68	44	5100	120	3000K	66	08
DP COMPACT 1200 44W/4000K GR IP66	4058075210042	1290 x 86 x 68	44	5400	120	4000K	66	08
DP COMPACT 1200 44W/6500K GR IP66	4058075210066	1290 x 86 x 68	44	5400	120	6500K	66	08
DP COMPACT 1500 31W/3000K GR IP66	4058075424265	1590 x 86 x 68	31	3500	120	3000K	66	08
DP COMPACT 1500 31W/4000K GR IP66	4058075210080	1590 x 86 x 68	31	3800	120	4000K	66	08
DP COMPACT 1500 55W/3000K GR IP66	4058075424289	1590 x 86 x 68	55	6300	120	3000K	66	08
DP COMPACT 1500 55W/4000K GR IP66	4058075210103	1590 x 86 x 68	55	6700	120	4000K	66	08
DP COMPACT 1500 55W/6500K GR IP66	4058075210127	1590 x 86 x 68	55	6700	120	6500K	66	08

	EAN	θ (°C)	V _{AC}	Hz	∠	PF	R _a	⚖
DP COMPACT 1200 23W/3000K GR IP66	4058075424227	-35...+50	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.1 kg
DP COMPACT 1200 23W/4000K GR IP66	4058075210028	-35...+50	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.1 kg
DP COMPACT 1200 44W/3000K GR IP66	4058075424241	-35...+50	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.1 kg
DP COMPACT 1200 44W/4000K GR IP66	4058075210042	-35...+50	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.2 kg
DP COMPACT 1200 44W/6500K GR IP66	4058075210066	-35...+50	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.2 kg
DP COMPACT 1500 31W/3000K GR IP66	4058075424265	-35...+50	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.4 kg
DP COMPACT 1500 31W/4000K GR IP66	4058075210080	-35...+50	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.4 kg
DP COMPACT 1500 55W/3000K GR IP66	4058075424289	-35...+50	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.4 kg
DP COMPACT 1500 55W/4000K GR IP66	4058075210103	-35...+50	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.4 kg
DP COMPACT 1500 55W/6500K GR IP66	4058075210127	-35...+50	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.4 kg








DAMPPROOF COMPACT IP66

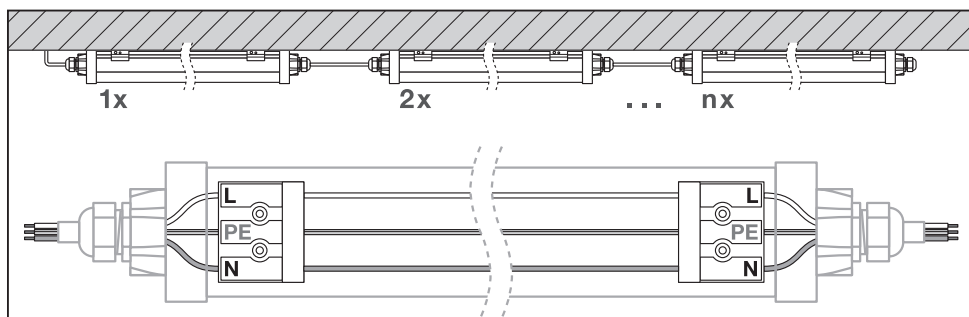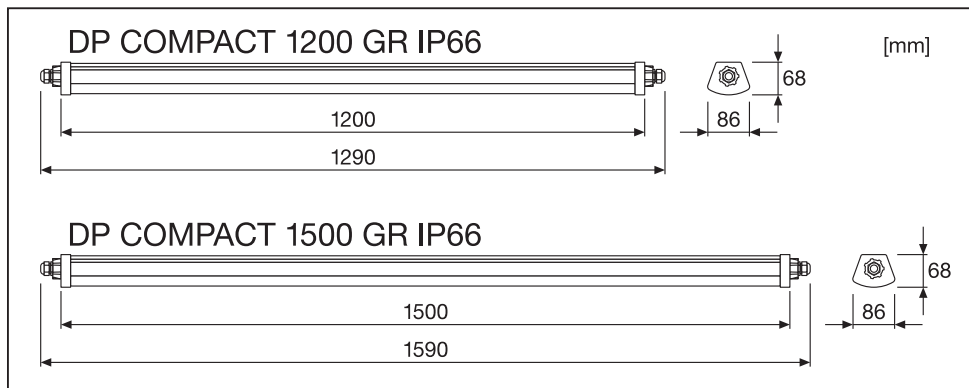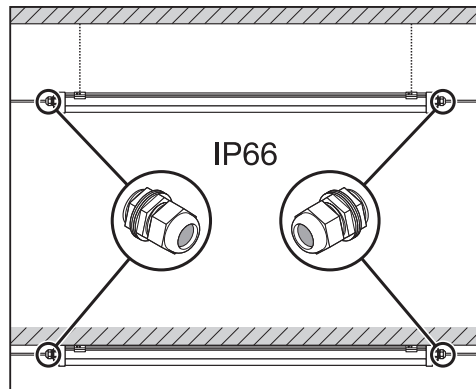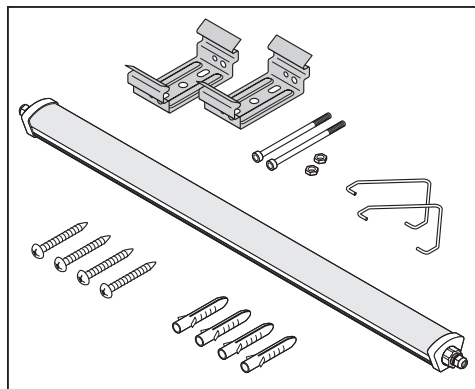

n	B10	B16	C10	C16
DP COMPACT 1200 GR IP66	20	20	20	20
DP COMPACT 1500 GR IP66	16	16	16	16

2

DAMPPROOF COMPACT IP66

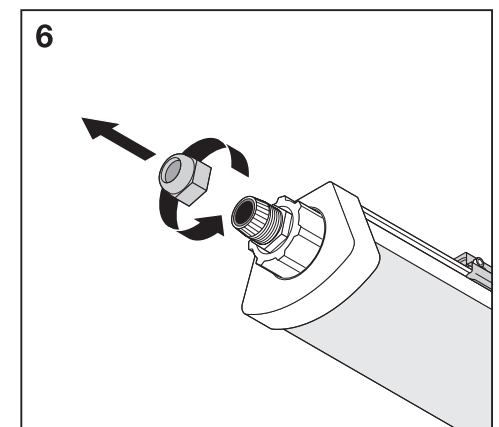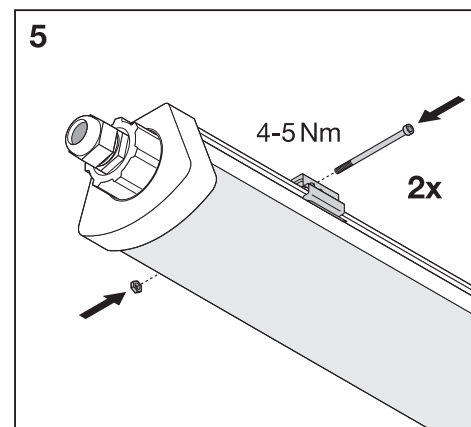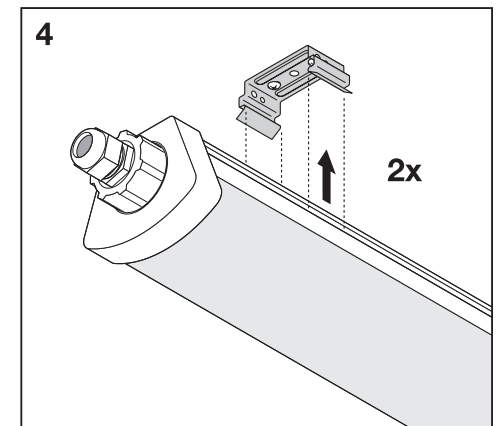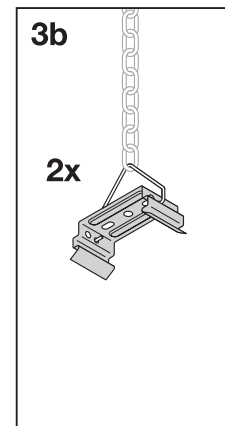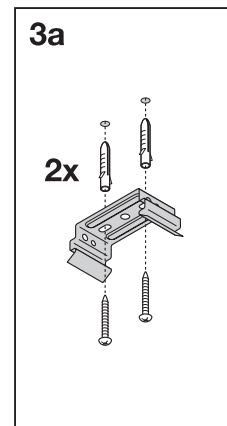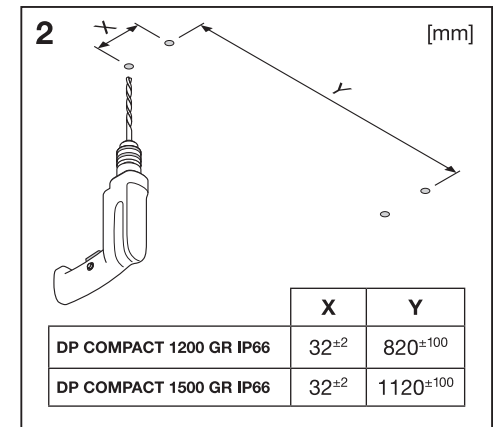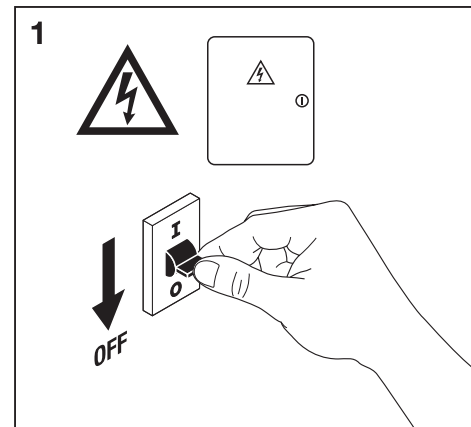

3