


ALUMAX



Rakenne	Runko alumiinia, kupu karkaistua lasia.
Väri	Runko harmaa, kupu kirkas.
Valonlähde	Loistelamppu T5, tilattava erikseen.
Asennus	Soveltuu seinä- tai kattoasennukseen. Pinta-asennus.
Kytkenä	Jousiliittimet 5 x 2,5 mm ² , ketjutettavissa.

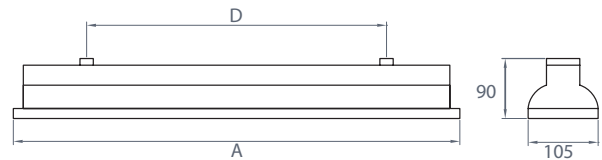

	A	D
14W	624	534
24W	624	534
28W	1224	1134
35W	1542	1434
49W	1524	1434
54W	1224	1134
80W	1524	1434
2 x 14W	624	534
2 x 24W	624	534
2 x 28W	1224	1134
2 x 35W	1542	1434
2 x 49W	1524	1434
2 x 54W	1224	1134
2 x 80W	1524	1434

IP66	☉ -0-	VÄRI	PAINO KG	SNRO
A3MLAA	T5 14W GL/RS	harmaa	2,40	4310076
A3MLBA	T5 24W GL/RS	harmaa	2,50	4310077
A3MLCB	T5 28W GL/RS/LJ	harmaa	3,30	4310066
A3MLDB	T5 35W GL/RS/LJ	harmaa	4,60	4310067
A3MLEB	T5 49W GL/RS/LJ	harmaa	4,60	4310068
A3MLFB	T5 54W GL/RS/LJ	harmaa	3,30	4310069
A3MLGB	T5 80W GL/RS/LJ	harmaa	4,60	4310070
A3MLHA	T5 2x14W GL/RS	harmaa	2,40	4310078
A3MLIA	T5 2x24W GL/RS	harmaa	2,50	4310079
A3MLJB	T5 2x28W GL/RS/LJ	harmaa	3,40	4310071
A3MLKB	T5 2x35W GL/RS/LJ	harmaa	4,70	4310072
A3MLLB	T5 2x49W GL/RS/LJ	harmaa	4,70	4310073
A3MLMB	T5 2x54W GL/RS/LJ	harmaa	3,40	4310074
A3MLNB	T5 2x80W GL/RS/LJ	harmaa	4,70	4310075



GL	Lasikupu
RS	Salvat ruostumatonta terästä
LJ	Läpijohdotettu