

Start Highbay HE DALI

START Highbay HE IP66 DALI 29000lm 865 WB

0043923



Product features

- START Highbay High Efficacy; DALI dimmable; Drive current: 4100mA; 180W; 29000lm; 161lm/W; 54000Hrs L80B50; 6500K; CRI80; Beam angle: 80°; A++ A+ A; 365mm of diameter; RG1; Class I; IK08; IP66; 0.25m mains cable; 0.3m control cable; 1.2m chain length including hooks



PRODUCT OVERVIEW

Product name	START Highbay HE IP66 DALI 29000lm 865 WB
Technology	LED
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4309076
Warranty	5 years
Fixture luminous flux (lm)	29000
Luminaire efficacy (lm/W)	161
Colour temperature (K)	6500
CRI (Ra)	80
Beam Angle (°)	80
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	180
Electrical protection	Class I
IP rating	IP66
IK rating	IK08
Product EAN number	5410288439235

DATA TABLE

General data

Product name	START Highbay HE IP66 DALI 29000lm 865 WB
Technology	LED
General application	Logistics & Industry
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001716
E-number FI	4309076
Warranty	5 years

Optical data

Fixture luminous flux (lm)	29000
----------------------------	-------

Start Highbay HE DALI

START Highbay HE IP66 DALI 29000lm 865 WB

0043923

Luminaire efficacy (lm/W)	161
Colour temperature (K)	6500
CRI (Ra)	80
Beam Angle (°)	80
Glare control	< 25
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	180
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15
Electrical protection	Class I
Drive current (mA)	4100
Inrush Current (A)	85
Inrush Duration (µs)	600
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	4
Max. Luminaires per 13A C Breaker	5
Max. Luminaires per 16A C Breaker	7
Max. Luminaires per 20A C Breaker	8
Max. Luminaires per 10A B Breaker	2
Max. Luminaires per 13A B Breaker	3
Max. Luminaires per 16A B Breaker	4
Max. Luminaires per 20A B Breaker	5

Lifetime data

Lifespan L70 B50	54000
Lifespan L80 B50	54000
Lifespan L90 B50	54000
Lifespan L90 B10	50000

Physical data

IP rating	IP66
IK rating	IK08
Nominal Product Length (mm)	365
Nominal Product Width (mm)	365
Nominal Product Height (mm)	194
Nominal Product Diameter (mm)	365
Weight (kg)	5.5

Packaging

Single packaging type	Carton
Product EAN number	5410288439235
Packaging single length / height (cm)	43.5
Packaging single width (cm)	43.5
Packaging single depth (cm)	22.5
DUN14 (outer)	05410288439235

Start Highbay HE DALI

START Highbay HE IP66 DALI 29000lm 865 WB

0043923


Units per outer package	1
Packaging outer length / height (cm)	43.5
Packaging outer width (cm)	43.5
Packaging outer depth (cm)	22.5

PHOTOMETRY

0.5	0.73	E(0°) E(C0)	74170 21883
1.0	1.46	E(0°) E(C0)	18543 5469
1.5	2.20	E(0°) E(C0)	8244 2429
2.0	2.93	E(0°) E(C0)	4536 1388
2.5	3.66	E(0°) E(C0)	2957 875
3.0	4.39	E(0°) E(C0)	2080 607

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 72.4°)

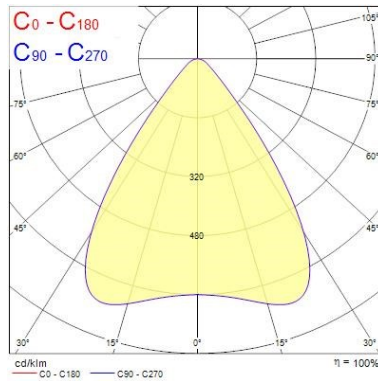

TECHNICAL DRAWINGS

