



SLC LED STRIP S2 MONO CV 126 5M 8MM 9,6W 1000LM 4000K

08/11/2022

S11062



Product description

Outstanding light output and low power. Suitable for most installations as direct, indirect, decorative and background lighting.

Our bestseller is now available in an upgraded version with better colour rendering CRI 90+, more lumen output and higher efficiency. Suitable for most installations as both direct and indirect lighting. Create uniform light with 126 LEDs pro meter. Must be placed in a profile for cooling and ensure a long lifetime. With double-sided 3M tape, the strip is versatile and easy to mount.





Technical data

Model	Strip	Mounting method	Surface mounting/recessed mounting
Lamp type	LED not exchangeable	Number of nodes per meter	126
Lamp power per meter	9,6 W	Luminous flux per meter	1000 lm
Voltage type	DC	Lamp voltage	24 - 24 V
Beam angle	120 °	Type of control gear	LED operating device voltage-controlled
Rated life time L80/B10 at 25 °C	60000 h	Degree of protection (IP)	IP20
Protection class	II	Colour of light	White
Colour temperature	4000 - 4000 K	Colour rendering index CRI	90-100
Width	8 mm	Height/depth	2 mm
Length of particular segments	55,6 mm	Self-adhesive	Yes
Type of wiring	Ending	Number of poles	2
Conductor cross section	0,35 mm ²	Connection type	Solder




Colour rendering index (CRI/Ra)	90
LED-Strip length (m)	5
Max length per connection:	5 meter
3M adhesive tape	Yes
Brand	SLC

Beam angle (°)	120
Cutting point, every: (mm)	55
Operating temperature	-20°C ~ +45°C
Dimmable	Yes
Produced by	The Light Group

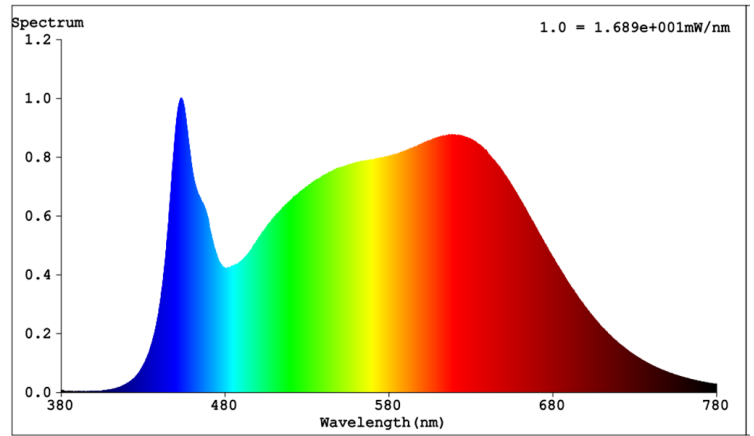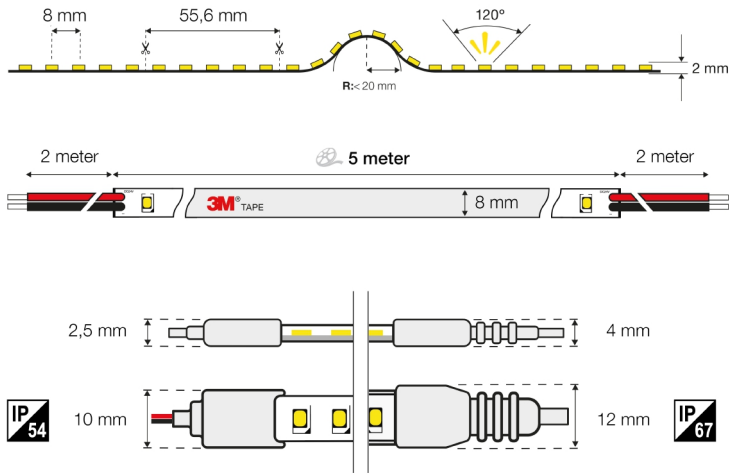




10mm x 1000mm



C Halfplanes


180.0 — 0.0
270.0 — 90.0

Flux 1029 lm
Maximum 323.78 cd/klm
Position C=247.50 G=5.00
Efficiency: 100.00%
Date: 13-10-2020
Asymmetrical

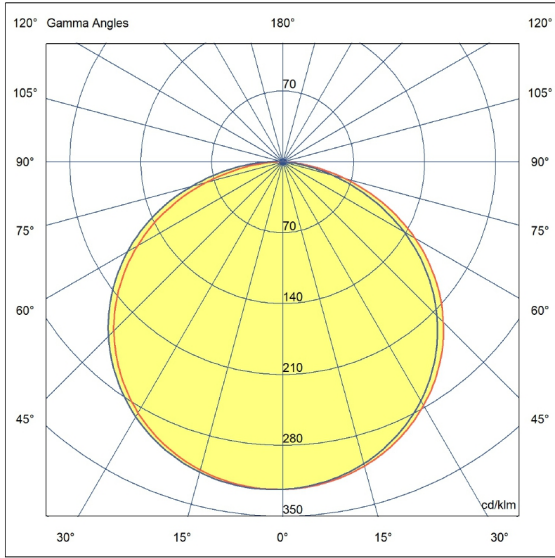

Scandinavian Lighting Concept

S11062

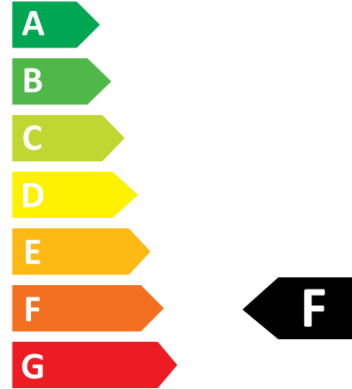

5 kWh/1000h



2019/2015

