


NOMAK-HF C-PRo

Symmetrical halogen-free data cable for industrial control equipment

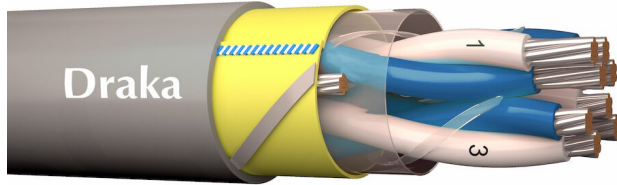

GENERAL INFO

APPLICATION

These symmetrical data transmission cables are used in control and supervision centre for industrial sites. They are suitable for fixed installation inside housings and also outdoors.

Declaration of Performance (DoP)
Nominal voltage U [V]

See Table Delivery info
250

CERTIFICATIONS AND DESIGN STANDARDS

CE **RoHS**



IEC 60332-1
EN 50575:2014+A1:2016

IEC 60332-3
EN 13501-6, class Cca-s1,d1,a1

IEC 60754

IEC 61034

CABLE DESIGN

Conductor	Copper
Conductor surface	Tinned
Insulation	Polyethylene (PE)
Drain wire	Yes
Screen over stranding	Foil
Outer sheath	Halogenfree polymer

APPLICATION PROPERTIES

Max. conductor temperature [°C]	70
Permitted cable outer temperature after assembling without vibration (min) [°C]	-40
UV resistant	Yes
Outdoor installation	Yes
Permitted cable outer temperature during assembling/handling (min) [°C]	-5
Minimum permissible bending radius during laying	15 x D under maximum tension 10 x D without tension

FIRE PROPERTIES

Reaction-to-fire, CPR classification	Cca-s1,d1,a1
Self-extinguishing	Yes
Flame retardant	In accordance with EN 13501-6
Halogen free	acc. IEC/EN 60754-1/2
Low smoke (acc. IEC 61034-2)	Yes

PRODUCT RANGE

PRODUCT NAME	Snro	EAN-code (GTIN)	DOP number	Packaging type	Standard delivery length
NOMAK-HF C-PRo 2x2x0,5+0,5 K1000	0241679	8711401076496	1009961	Drum	1,000
NOMAK-HF C-PRo 4x2x0,5+0,5 K1000	0241680	8711401074492	1009805	Drum	1,000
NOMAK-HF C-PRo 8x2x0,5+0,5 K1000	0241681	8711401074508	1009806	Drum	1,000
NOMAK-HF C-PRo 12x2x0,5+0,5 K1000	0241683	8711401078513	1010098	Drum	1,000
NOMAK-HF C-PRo 24x2x0,5+0,5 K1000	0241687	8711401074522	1009808	Drum	1,000
NOMAK-HF C-PRo 48x2x0,5+0,5 K1000	0241689	8711401074478	1009728	Drum	1,000

MECHANICAL AND ELECTRICAL VALUES

Test voltage [kV]	0.5
NVP value [%]	60

Product description (short)	Diameter over cable [mm]	Nominal operation capacitance [nF/km]	Characteristic impedance [Ohm]	Insulation resistance [MΩ·km]	Loop resistance [Ohm]	Weight [kg/km]	Min. permitted bending radius, during cable laying [mm]
2x2x0,5+0,5	9	90	90	2,000	81	75	
4x2x0,5+0,5	11	90	90	2,000	81	120	
8x2x0,5+0,5	14	90	90	2,000	81	190	
12x2x0,5+0,5	16	90	90	2,000	81	260	
24x2x0,5+0,5	22	90	90	2,000	81	470	
48x2x0,5+0,5	29	90	90	2,000	81	850	

© Prysmian Group Finland Oy. All rights reserved.

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group; any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without notice.

This specification is not contractually valid unless specifically authorised by Prysmian Group.