

SLAB STAND For Residential

C-NG series

- Innovative slab stand will raise the condenser up to 300mm or 500mm.
- Originally developed mechanism enables extremely fast assemble.
- Keeps the condenser away from snow, flood, pests.
- Each legs are independently adjustable for uneven surfaces.
- First slab stand roled out in Japan, the cradle of split AC.




H300mm




H500mm

Fastest installation in the industry.


Check out CATCHER's product videos

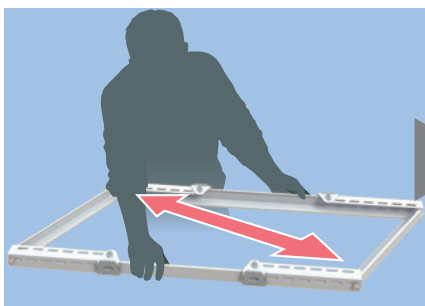

Open the pre-assembled frame by ONE-TOUCH.
3 seconds

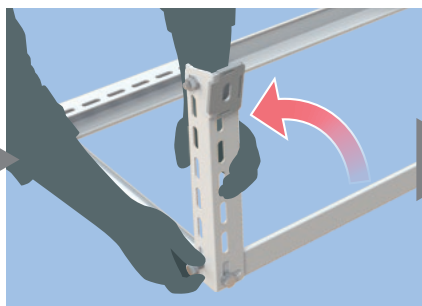




Raise and secure the pre-fixed legs.
80 seconds (20 seconds x 4)
(Legs are not pre-fixed for 500mm stand)

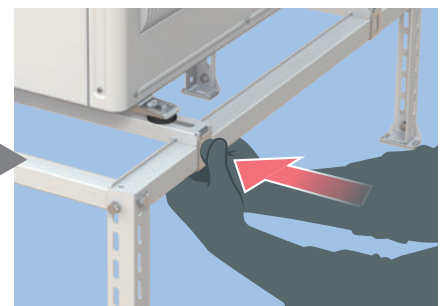



Instead of screwing, fix the side bar by ONE-TOUCH latch.
6 seconds (3 seconds x 2)

Corrosion Resistant

Spray water testing comparison

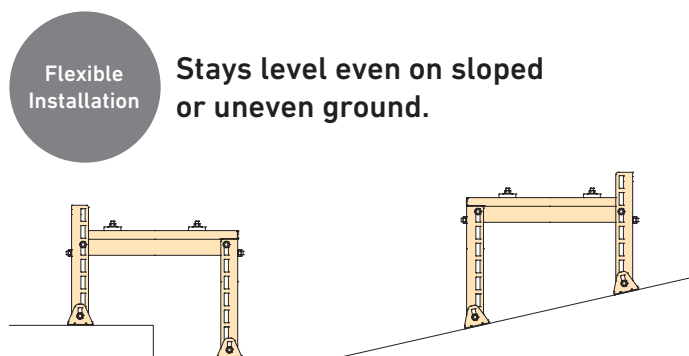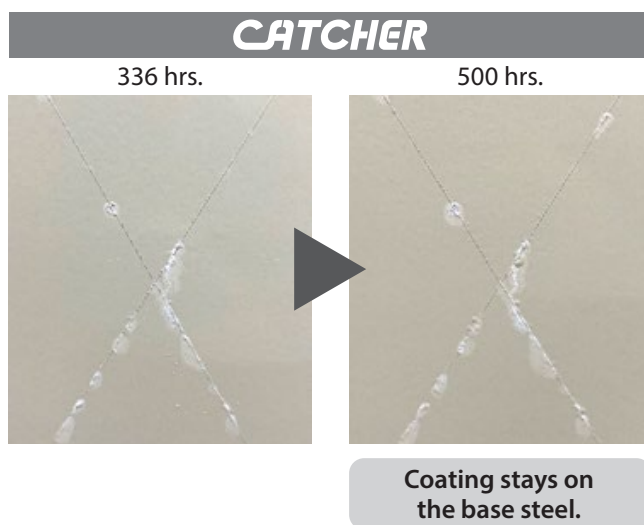
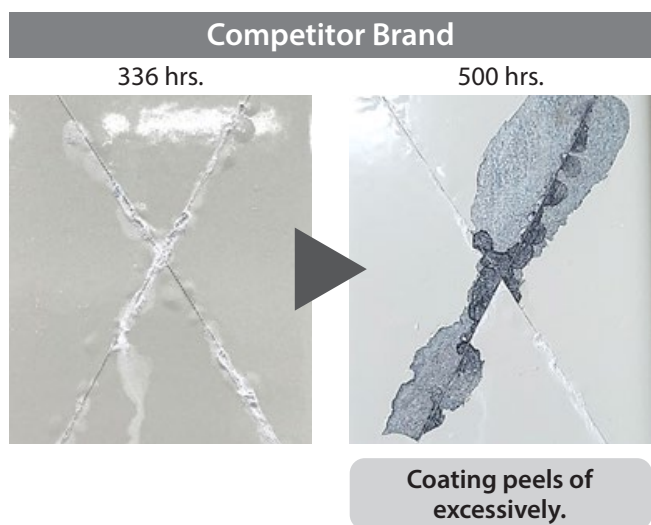


SLAB STAND - H300mm

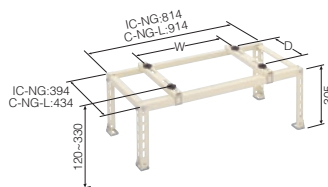

Item No.	A/C applicable size	Pitch adjustment Rectangular setting	Min. lot
IC-NG	W : 300 ~ 700 D : 160 ~ 340	0° ~ 32° (Level ~ 6.2/10) 0° ~ 13° (Level ~ 2.3/10)	4
C-NG-L	W : 400 ~ 800 D : 200 ~ 380	0° ~ 28° (Level ~ 5.2/10) 0° ~ 12° (Level ~ 2.1/10)	4

SLAB STAND - H500mm

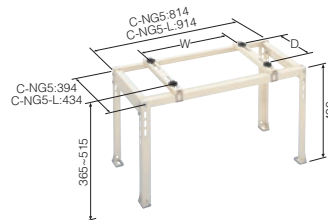

Item No.	A/C applicable size	Pitch adjustment Rectangular setting	Min. lot
C-NG5	W : 300 ~ 700 D : 160 ~ 340	0° ~ 23° (Level ~ 4.2/10) 0° ~ 11° (Level ~ 1.9/10)	4
C-NG5-L	W : 400 ~ 800 D : 200 ~ 380	0° ~ 21° (Level ~ 3.8/10) 0° ~ 10° (Level ~ 1.7/10)	4

INABA DENKO

INABA DENKI SANGYO CO., LTD.

Inaba Denko Overseas Sales Department
WEBSITE: <http://www.inaba-denko.com/en/>

