

THE NEW SILENT⁺ MINI ORANGE

BETTER THAN EVER

The world's No.1 Orange Mini Pump is perfect for ducted units; floor standing & chassis units; high wall split systems. Ideally installed within a ceiling void or similar area. Quietly Brilliant.



Ultra quiet – as low as 16dB(A)*

Variable speed, on demand power, unique sophisticated pump control algorithm = silence. No need for acoustic dampers, or anti-vibration mounting kits.

Proven 5th Gen Technology

Capacitance Sensing & Rotary Diaphragm = Silence & Power – up to 35L/h flow rate!

Low maintenance

Adaptive flow rates and on demand power means less stress on components.

Plug & Play**

Perfect for rapid replacement of the pump.

Backed with a 3 year guarantee

Aspen Pumps Silent⁺ Mini Pumps

All as low as 16 dB(A). We offer the quietest range of mini pumps in the world, for all applications.

UNIVOLT

* Assuming solid wall construction with a 2kW unit

** New pumps are not backwards compatible with previous / current models.



Silent+ Mini Orange®

CONDENSATE REMOVAL PUMP

The world's No.1 Orange mini pump is now better than ever. Using our proven 5th Gen Technology, the Silent+ Mini Orange boasts sound levels as low as 16dB(A)*. So quiet it eliminates the need for additional noise or vibration dampers. Capacitance sensor technology, provides intelligent, adaptive flow rates. Quietly brilliant.



35L/h max. flow



10m max. rec. head




As low as 16dB(A)*

Key Features

- Proven 5th Gen Technology: Capacitance Sensing & Rotary Diaphragm = Silence & Power
- Low maintenance
- Plug and play**
- 3 year warranty


Suitability

- Up to 40kW / 136,000Btu/h
- Ducted units; floor standing & chassis units; high wall split systems
- **Perfect for...** small commercial and residential units

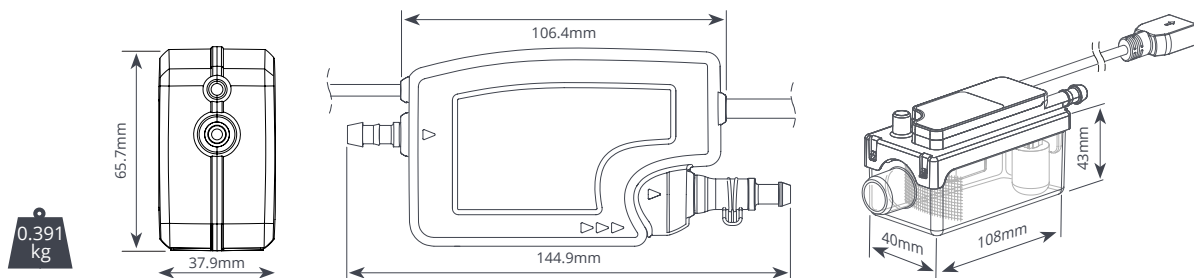

SPECIFICATIONS

Max. flow	35L/h @ 0m head
Max. rec. head	10m
Max. suction lift	1.5m
Min. dB(A) @ 1m	16dB(A)*
Power supply	100-250VAC, 0.18A, 2.4W, 50/60 Hz
Rated	Continuous
Class	II □
Max. unit output	40kW (136,000Btu/h)
Max. ambient temp	40°C (104°F)
IP Protection	IP24
Inlet o/d	Ø16mm (5/8")
Outlet o/d	Ø6mm (1/4")
Safety switch	5.0 A Normally closed
Self priming	✓

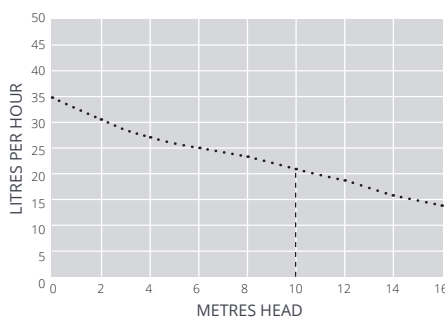

OPTIONS

Silent+ Mini Orange (5th Gen, Europe) FP3430

IN THE BOX

Silent+ Mini Orange 5th Gen pump • Reservoir (inc. filter and lid) • 1.5m plug and play cable** • 1.5m clear PVC tube • 150mm clear vent hose • 220mm Orange inlet hose • Drain connector kit: straight connector and rubber elbow • Quick start guide

SUGGESTED XTRA ACCESSORIES

Description	Part No.
Hose Clamp 10.1 dia. (x10)	B3340
S+ Mini Pump spare filters (x10)	FP3330
Barbed anti-siphon device	FP3336/1
Reservoir copper mesh filter (x10)	FP3460



Visit aspenpumps.com for more installation accessories.

*Assuming solid wall construction with a 2kW unit

**Not backwards compatible

Download full manual at aspenpumps.com

Information correct at time of going to press. Not all products are available in all regions.

aspenpumps.com | +44 (0)1323 848842 | sales@aspenpumps.com

part of **ASPEN PUMPS GROUP** **EN**