


## Free standing lightning protection masts 12-18m

**Cat. no.**  
65211809

**Type**  
65.18 AL 1P CZ

**Material**  
(Al) aluminium

Used to protect metal elements of the roof and devices (skylights, air conditioners, air handling units, ventilation ducts) against the effects of lightning. The supporting structure is an octopod frame base with concrete blocks, ensuring adequate wind load resistance. Mast mounting sets allow vertical plumbing in the range of 0°-1.5°. 44408208 PVC pad should be applied under the concrete blocks - to be ordered separately. Additionally, we recommend use of washers 94308222 for roofs covered with tar paper and 94308221 for roofs covered in membrane. Aluminium made mast and stainless steel octagonal frame base.

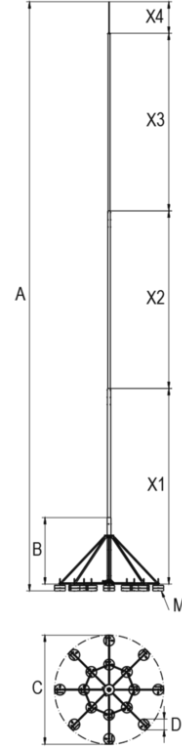

TYP	HEIGHT	WIND RESISTANCE	A	B	C	D	X1	X2	X3	X4	M	
65.18 AL 1P CZ	18000	122 km/h	18160	2000	3380	340	6000	6000	6000	1000	17×16 kg	482 kg

