

PACIFIC LED WT460C/WT461C

Mounting instructions

Instructions de montage
Montageanleitung
Montage instruktiv
Instruzioni di montaggio

Instrucciones de montaje
Instruções de montagem
Monteringsinstruktioner
Monteringsvejledning

Kokoonpano- ja kiinnitysohjeet
Montaj yönergəsi
Szerelési utasítások
Instrukcja montażu

Návod k montáži
Návod k montáži

LEDs

~220V...240V
50 Hz/60 Hz

max +35°C
min -20°C

IK08


30

CE


IP66

min 30 cm

Luminaire type	Max No of luminaires on MCB (16A type-B) *		Inrush Current Peak [A/μs]		
	PSD	PSU	PSD	PSU	
WT460C/461C & L700	20	30	48/180	11/270	
WT460C/461C & L1300	20	23S: 30 42S: 28	48/180	23S: 11/270	42S: 18/314
WT460C L1600	20	35S: 30 64S: 28	48/180	35S: 11/270	64S: 18/314

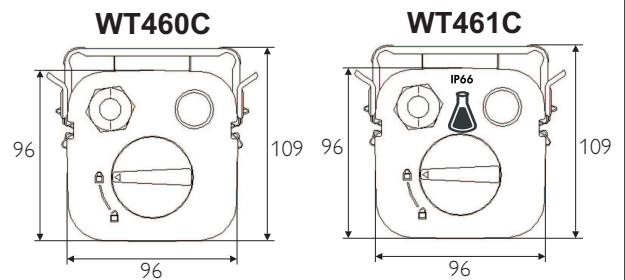

* Depends on the parasitic capacity and inductance of the power mains network

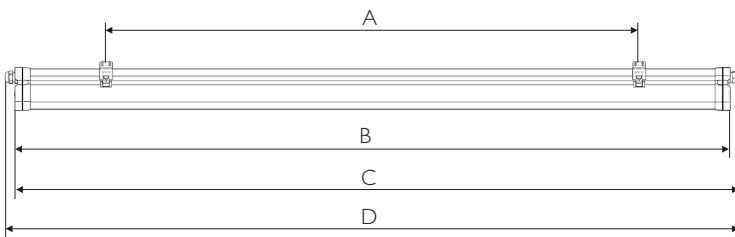

Luminaire type	A [mm]	B [mm]	C [mm]	D [mm]	kg max
WT460C/461C & L700	450	700	721		1,9
WT460C/461C & L1300	900	1300	1321		3,25
WT460C L1600	1200	1600	1621		3,7
WT460C/461C & TW1/TW3 L1300	900	1300	1321	1342	3,4
WT460C & TW1/TW3 L1600	1200	1600	1621	1642	3,9

