

TECHNICAL DATA AND INSTALLATION GUIDE

RavenShield Wall
Outdoor wall grille with gasket

Ravensberg Consulting AB

Stridbecksliden 4
SE-302 33 Halmstad
Sweden

ventilation@ravensberg.se

Explore more from Ravensberg

Scan or click the QR code to visit our YouTube channel for product videos, technical insights and more.

RavenShield Wall
Outdoor wall grille with gasket

- Outdoor wall grille with gasket for intake or exhaust air through an external wall. Manufactured from galvanized sheet steel with a powder-coated finish. Supplied with a round duct connection and gasket.



- Standard colours: Black RAL 9005 and White RAL 9003.
- Material: powder-coated galvanized sheet steel.

• RavenShield Wall - Article codes


Ravensberg Article Code	Product Description
RB-SH-WALL-125-BK9005	RavenShield Wall, Ø125, Black RAL 9005
RB-SH-WALL-125-WH9003	RavenShield Wall, Ø125, White RAL 9003
RB-SH-WALL-125-RAL[RAL number]	RavenShield Wall, Ø125, Special RAL colour on request
RB-SH-WALL-160-BK9005	RavenShield Wall, Ø160, Black RAL 9005
RB-SH-WALL-160-WH9003	RavenShield Wall, Ø160, White RAL 9003
RB-SH-WALL-160-RAL[RAL number]	RavenShield Wall, Ø160, Special RAL colour on request
RB-SH-WALL-200-BK9005	RavenShield Wall, Ø200, Black RAL 9005
RB-SH-WALL-200-WH9003	RavenShield Wall, Ø200, White RAL 9003
RB-SH-WALL-200-RAL[RAL number]	RavenShield Wall, Ø200, Special RAL colour on request
RB-SH-WALL-250-BK9005	RavenShield Wall, Ø250, Black RAL 9005
RB-SH-WALL-250-WH9003	RavenShield Wall, Ø250, White RAL 9003
RB-SH-WALL-250-RAL[RAL number]	RavenShield Wall, Ø250, Special RAL colour on request


Black RAL 9005 and White RAL 9003 are the most common choices. All RAL colours are available on request. MOQ may apply depending on the order, regardless of colour. For custom RAL, replace [RAL number] with the selected RAL code, e.g. RB-SH-WALL-125-RAL7016.

• Technical Parameters

Product Dimensions:

All dimensions are in mm.

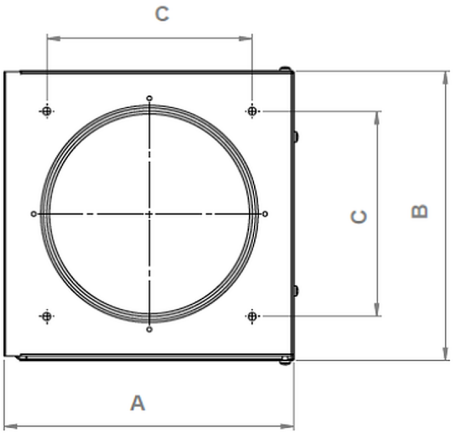

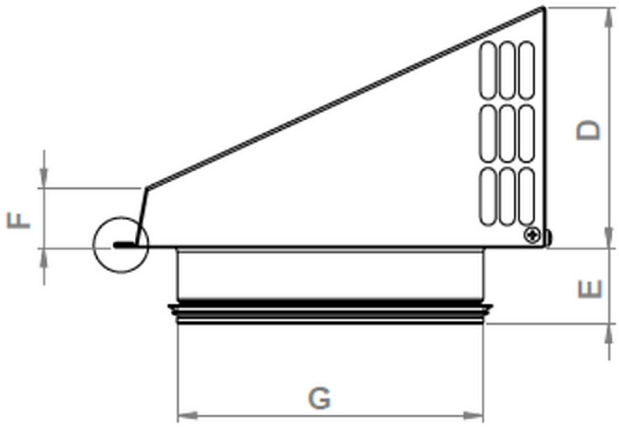

We reserve the right to change technical data without prior notice.

SPIRO Ø	A	B	C	D	E	F	Ø G
Ø125	226	226	160	126	40	31	125
Ø160	226	226	160	126	40	31	160
Ø200	270	270	220	145	40	31	200
Ø250	305	305	270	170	40	31	250

Specifications

- Suitable for both intake and exhaust air.
- Supplied with a round duct spigot and gasket.
- Material: powder-coated galvanized sheet steel.


Installation

1. Remove the four screws securing the front cover and remove the cover to access the rear mounting plate. See Picture 1.

2. Apply a suitable exterior-grade sealant between the duct spigot and the wall to prevent water ingress. Fix the rear mounting plate to the wall with four screws. See Picture 2.

3. Refit the front cover and secure it with the four screws. See Picture 1.

4. For cleaning, remove the front cover by unscrewing the four screws. See Picture 1.

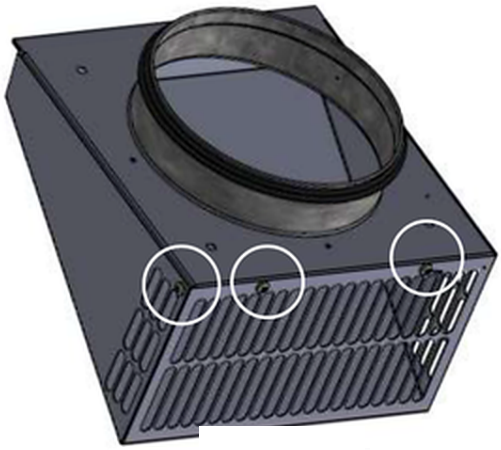


Picture 1




Picture 2

We reserve the right to change technical data without prior notice.

• Performance graphs

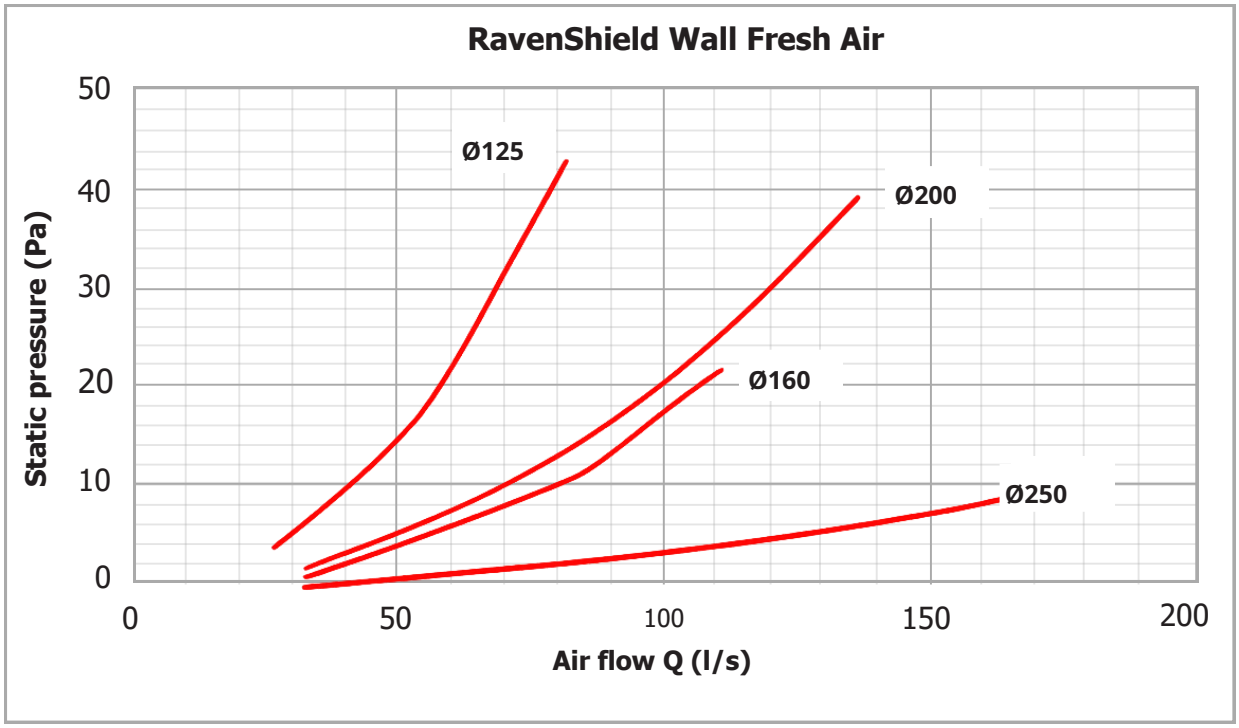

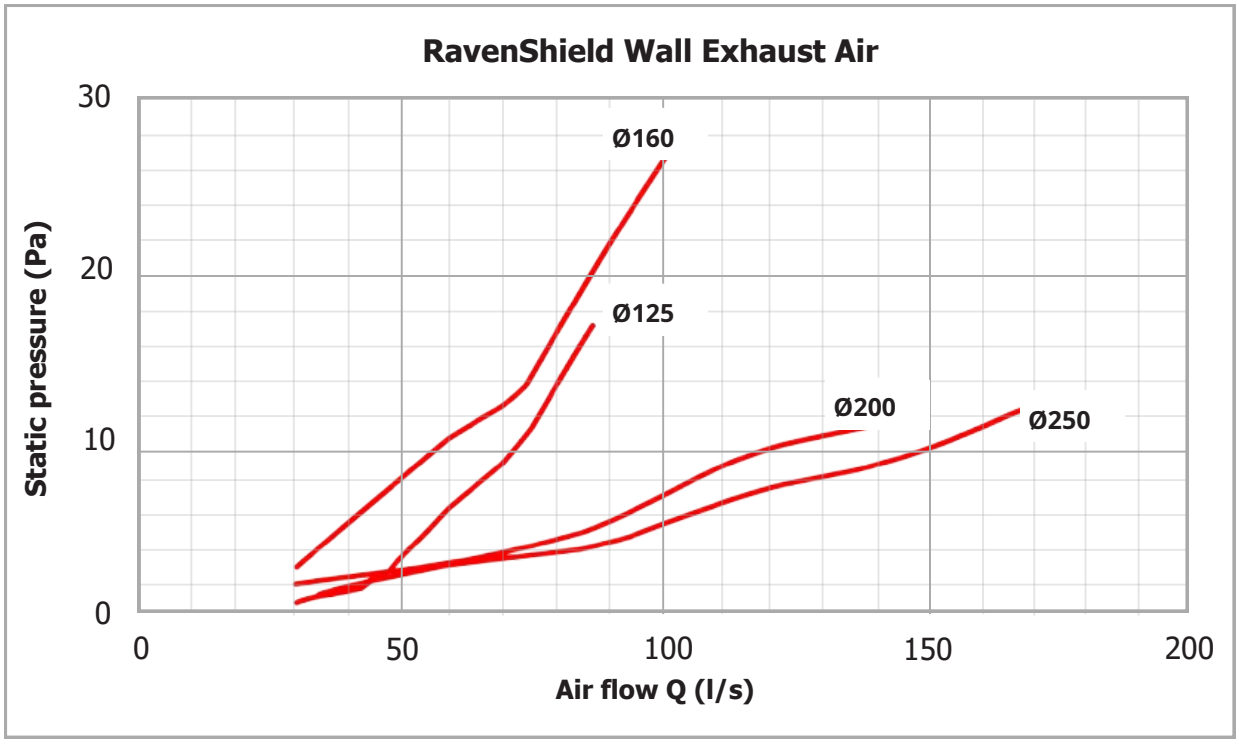

We reserve the right to change technical data without prior notice.