

EAN: 6414150079566

www.oras.com/en/products/oras/product/2738F



Kitchen faucet with operated easy-grip lever, flexible high swivel spout and aerator. Spout's swing angle is factory preset at 120° (can be limited to 60° or 80°).

F = with flexible pipes

- Kitchen
- Side operated, Single lever
- Deck mounted
- Chrome
- Swivel spout
- Easy-Grip Lever
- integrated diverter with automatic reset
- Pull-out hand spray
- Adjustable hot water stop (retrofitable), adjustable mix water temperature
- Litter filter(s)
- body made of DZR brass, surfaces in contact with drinking water contain less than 0.3% lead, waterways without nickel coating

Technical data

Flow properties


Flow-rate at 300 kPa	0.2 l/s
Pressure loss with flow (0.2 l/s)	300 kPa



Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	200 mm
Material	brass


Regulations

EN standard	EN 15091
Noise class	I (ISO 3822) Oras lab.

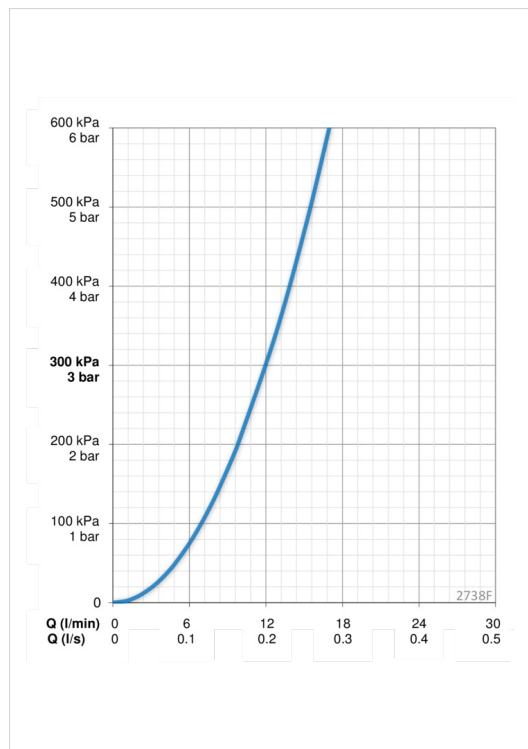

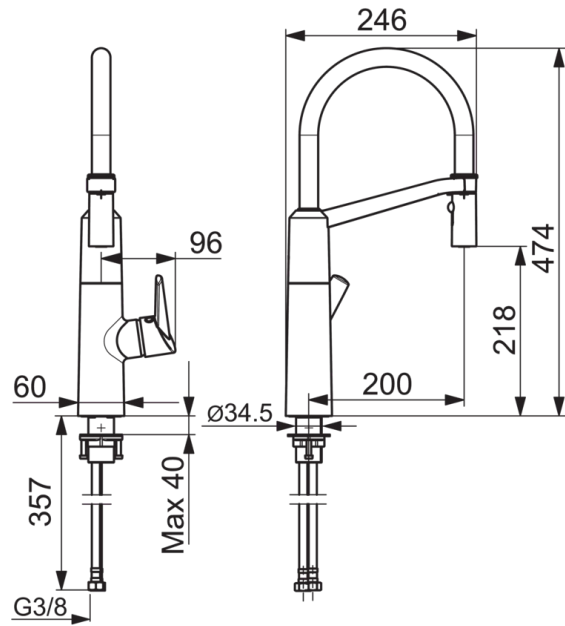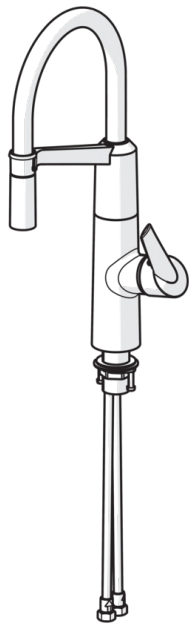

Spare parts

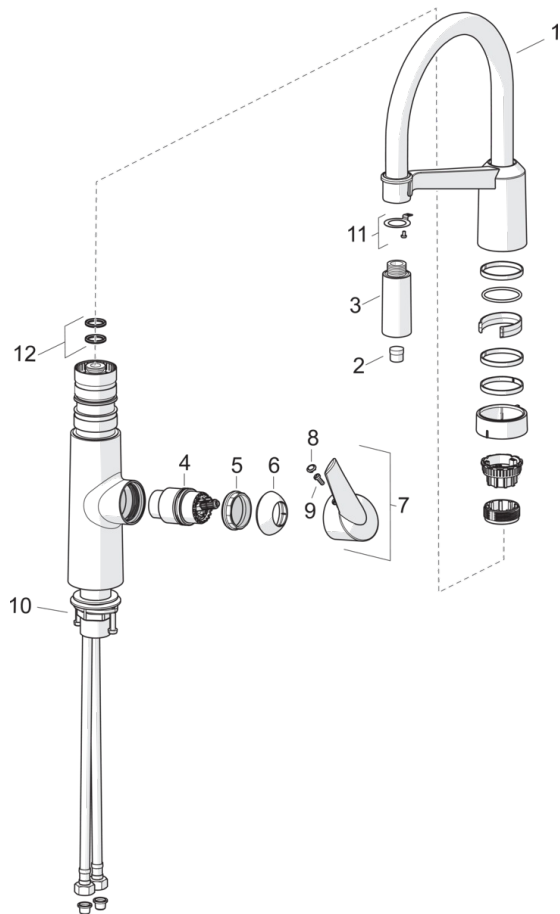

SP2738F

	Code
01	1002660V
02	1000972V
03	1001321V
04	158890
05	158726
06	159053V
07	601319V
08	159020/10
09	159248/10
10	602629V
11	1001323V
12	601072V