


Coupler
Hot dip galvanized / black enamelled RAL 9005

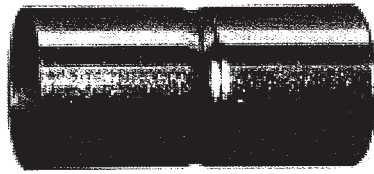

Product information – technical leaflet

Connection for galvanized/ black enamelled steel pipe

Material: mild steel rolled
 Galvanized: inside and outside hot dip galvanized acc. to EN ISO 1461 or black enamelled
 Approval: VDE/ÖVE EN 61386-1
 VDE/ÖVE EN 61386-21

Coupler hot dip galvanized (EN ISO 1461)

<i>Item number</i>	<i>Sign</i>	<i>OD- Ø in mm</i>	<i>Length in mm</i>
50 5665	Coupler hot dip galvanized 16 – STMV16	18	45
50 5666	Coupler hot dip galvanized 20 – STMV20	22	54
50 5667	Coupler hot dip galvanized 25 – STMV25	27,4	58
50 5668	Coupler hot dip galvanized 32 – STMV32	34,4	68
50 5669	Coupler hot dip galvanized 40 – STMV40	42,4	76
50 5670	Coupler hot dip galvanized 50 – STMV50	52,4	96
50 5671	Coupler hot dip galvanized 63 – STMV63	65,4	104

Coupler black enamelled (RAL 9005)

<i>Item number</i>	<i>Sign</i>	<i>OD- Ø in mm</i>	<i>Length in mm</i>
50 5651	Coupler black enamelled 16 – STM16	18	45
50 5653	Coupler black enamelled 20 – STM20	22	54
50 5655	Coupler black enamelled 25 – STM25	27,4	58
50 5657	Coupler black enamelled 32 – STM32	34,4	68
50 5659	Coupler black enamelled 40 – STM40	42,4	76
50 5661	Coupler black enamelled 50 – STM50	52,4	96
50 5663	Coupler black enamelled 63 – STM63	65,4	104