


Indoor light

RS PRO LED S2 IP65

EAN 4007841055820



Functional description

Same design as the RS PRO LED S1 IP65, just larger in diameter. Besides this, "big brother" is equally as impressive as little sister: IP65 rating, class II protection, impact-resistant to IK10, STEINEL LED lighting system, high-frequency sensor technology, wireless connection, basic light-level function, presence mode and neighbouring light function.

Technical specifications

Dimensions (Ø x H)	362 x 82 mm
Mains power supply	220 – 240 V , 50 / 60 Hz
Sensor Technology	High frequency
Transmitter power	< 1 mW
Output	26 W
Interconnection	Yes
Luminous flux	2010 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Base	without
LED cooling system	Active and Passive Thermo Control
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °
Electronic scalability	Yes
Mechanical scalability	No
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 min
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Functions	Neighbouring-light function, Presence function
Impact resistance	IK10
IP rating	IP65
Protection class	II
Ambient temperature	-10 – 50 °C
Housing material	Aluminium
Cover material	Plastic, opal
Manufacturer's Warranty	5 years

Data sheet



Indoor light

RS PRO LED S2 IP65

EAN 4007841055820

Version

Neutral white

Indoor light

RS PRO LED S2 IP65

EAN 4007841055820

Light distribution curve 1

Sensorenerfassungsbereich 1

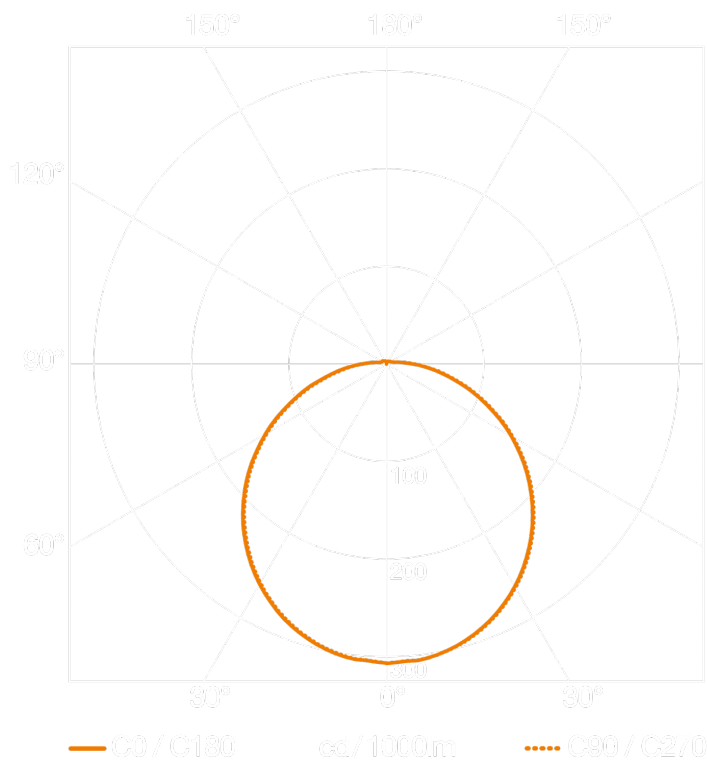


Image not found or type unknown

