

EAN: 6414150035531

www.oras.com/en/products/oras/product/6114



Touchless washbasin faucet with a mixing valve. Fixed electrical connection 230 V. Recognition range can be adjusted at the faucet. The faucet is equipped with litter filters and non-return valves.

- Public & Semi-public
- Touchless, External transformer
- Deck mounted
- Chrome
- Fixed spout
- Litter filter(s), Mixing valve

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller)	0.11 l/s
Pressure loss with flow (0.1 l/s)	170 kPa

Technical properties

Hot water supply	max. +80°C
Working pressure	50 - 1000 kPa
Connection size	G3/8
Projection	120 mm
Material	brass

Software settings

Afterflow period	1 s (0 - 255 s)
Max. flow period	2 min (1 - 255 s)

Electronic properties


Electrical Connection	230 VAC
-----------------------	----------------


Regulations

EMC Directive	CE 89/336/EEC
EN standard	EN 15091
Noise class	I (ISO 3822)
Protection class	IP 67


Type approvals

STF certificate	STF VTT-RTH-00112-11
-----------------	-----------------------------

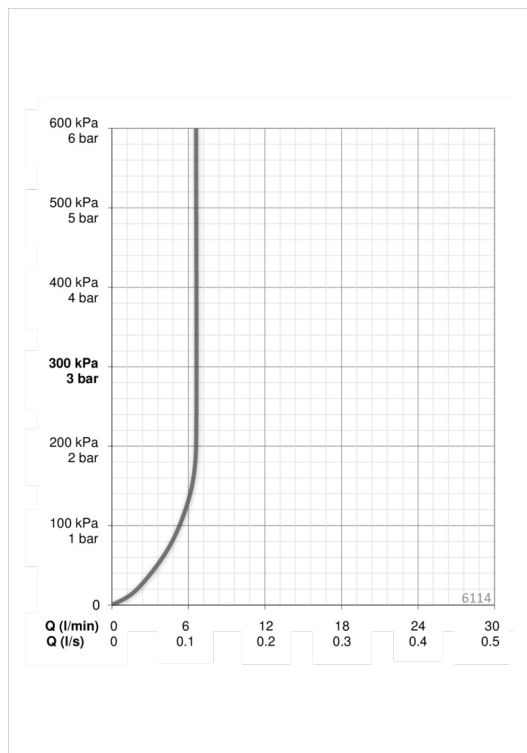

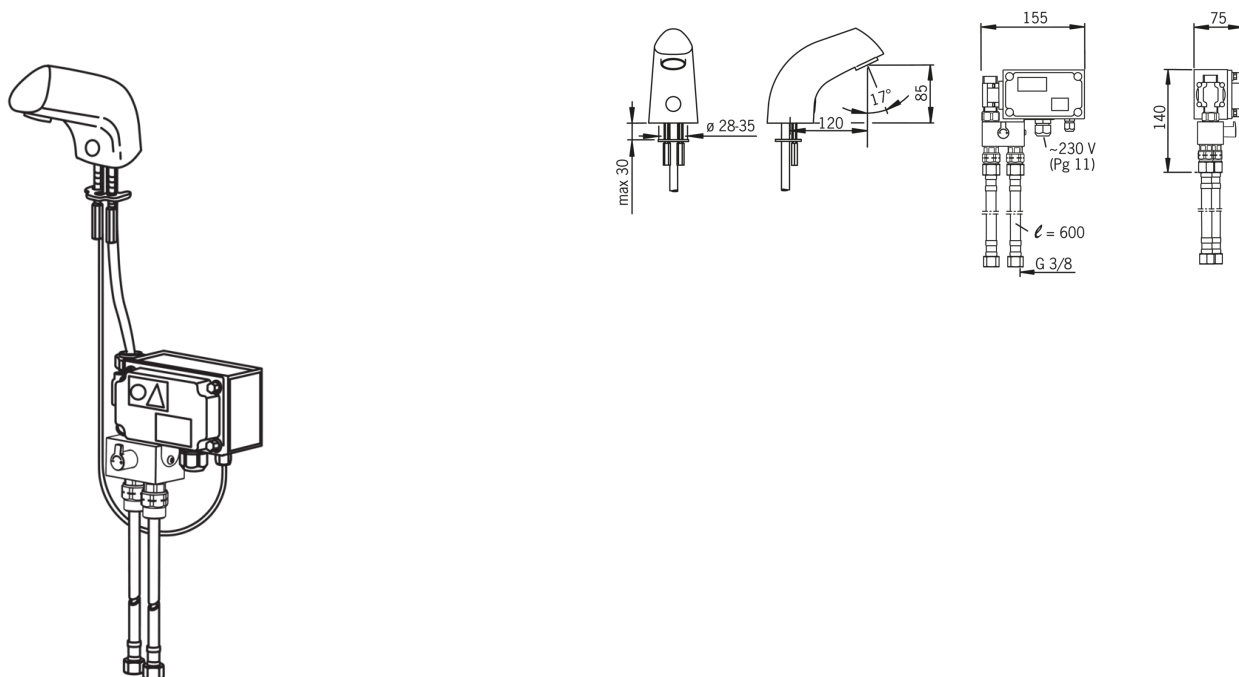

Spare parts

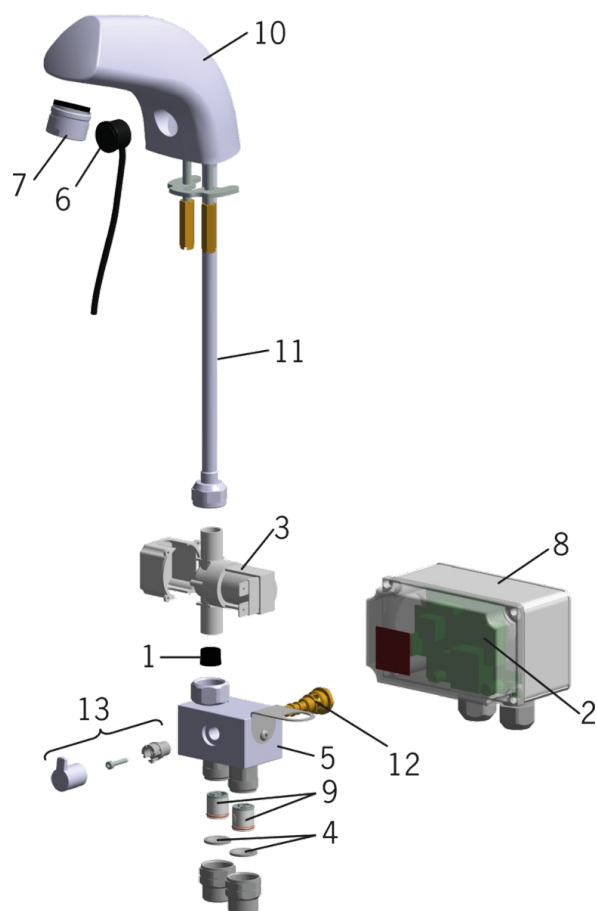

SP6114

	Code
01	198084
02	198085
03	198092
04	198094/2
05	600934V
06	198789/3
06	198789/9
06	198789/6
06	198789
07	198792
08	198095
09	105311
10	198785
11	198787
12	199201V
13	600493V