

EAN: 6414150076008

www.oras.com/en/products/oras/product/6120FT

Touchless washbasin faucet with a temperature adjustment handle (as factory default). The faucet can be easily modified for preset temperature or premixed water. The faucet is equipped with litter filters, non-return valves and flexible pipes. Electrical connection with a plug transformer 230/12 V.

Alternative: concealed power supply 199275. A maximum five of these items can be connected to the power supply at a time.

No adjustments are needed at installation because an advanced Autofocus sensor is used. Flow controller (6 l/min) enables low water consumption (0.5 l / instance of use).



- Public & Semi-public
- Touchless, Plug-in transformer
- Deck mounted
- Chrome
- Fixed spout
- PCA® for a constant flow rate regardless of pressure fluctuations
- Temperature control handle
- Cold or pre-tempered water
- Non-return valve(s), Litter filter(s)
- Autofocus sensor
- Convertible for cold or premixed-water supply

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller)	0.1 l/s
Pressure loss with flow (0.1 l/s)	200 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	96 mm
Material	brass

Software settings


Afterflow period	2 s ± 1 s
Max. flow period	2 min


Electronic properties

Electrical Connection	230 / 12 V
-----------------------	-------------------


Regulations

EMC Directive	CE 2004/108/EY
EN standard	EN 15091
Noise class	I (ISO 3822)
Protection class	IP 55 / transformer IP 40

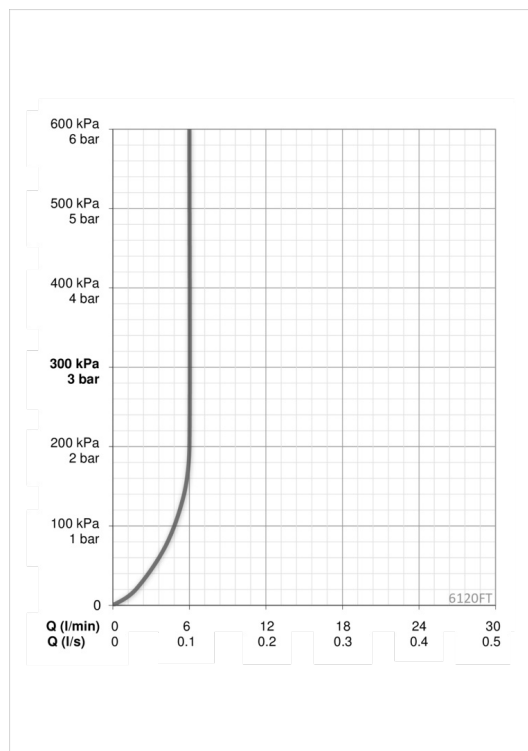

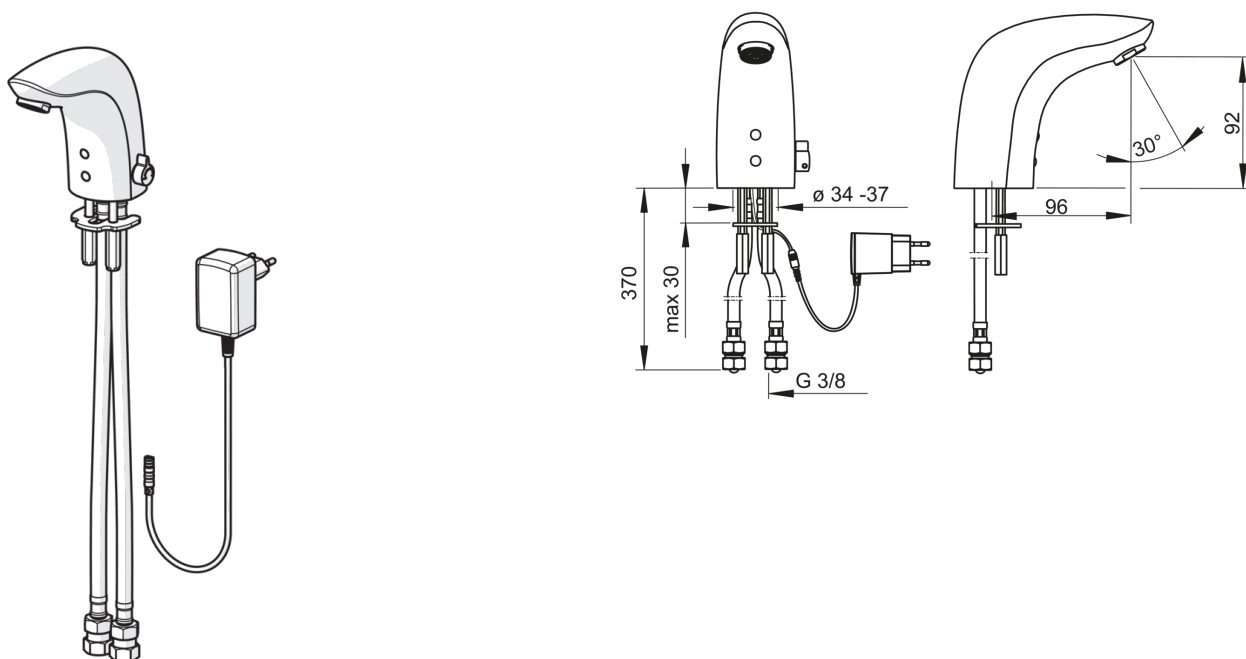

Spare parts

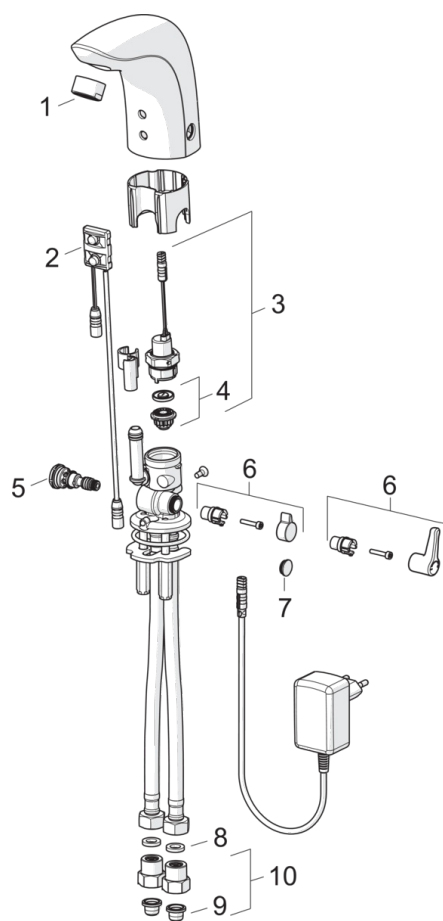

SP6120FT

	Code
01	199266V
02	600082V
03	199206V
04	199205V
05	199201V
06	1005158V
06	199212V
07	199208V
08	600705/10
09	199257/2
10	198473/2