
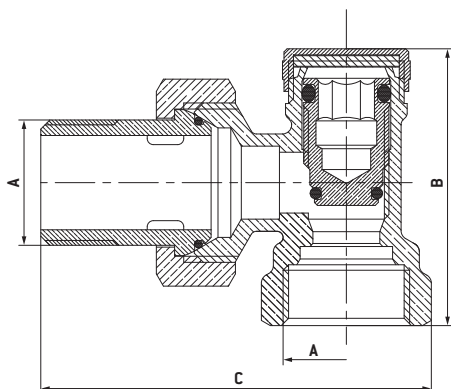


3603...**LOCKSHIELD VALVE**

Radiator valves

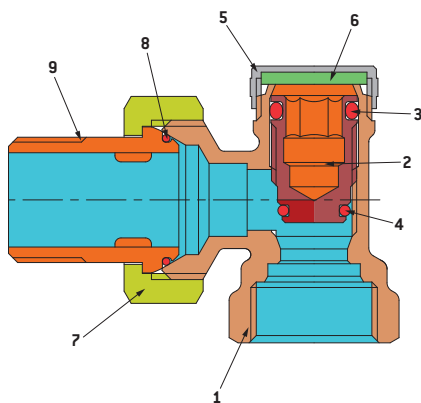

- Female angle lockshield valve with connection for iron pipes
- Maximum nominal pressure: 10 bar
- Temperature range: 0-95°C

This valve is particularly indicated for distributing, regulating and shutting off heat carriers.

The field of application is in plant engineering in residential heating systems. The valve allows thermal balancing of heating elements by micro-metrically modifying the fluid outflow rate.

Seat seal is provided by an EPDM Perox O-ring, which is ideal for use with water and glycol solutions max 50%.

Pre-sealed PTFE connectors are available for certain models.

Components:

POSN.	PART NAME	No. Pcs.	MATERIAL
1	Body	1	CW617N UNI-EN 12165 Nickel-plated
2	Upper part	1	CW614N UNI-EN 12164
3	O-ring 107	1	EPDM Perox
4	O-ring 112	1	EPDM Perox
5	Cap	1	CW614N UNI-EN 12164 Nickel-plated
6	Cap seal	1	PVC
7	Nut	1	CW617N UNI-EN 12165 Nickel-plated
8	O-ring	1	NBR
9	Connector	1	CW617N UNI-EN 12165 Nickel-plated (1/2") CW614N UNI-EN 12164 Nickel-plated (3/8")

Dimensions:


A	B	C
3/8"	45,5	62
1/2"	45,5	64
3/4"	47	82

Packaging/price:

	3/8"	1/2"	3/4"
PIECES PER BOX	15	15	10
PIECES PER CARTON	150	150	100
PRICE	3,05	3,03	4,78

3604...**LOCKSHIELD VALVE**

Radiator valves

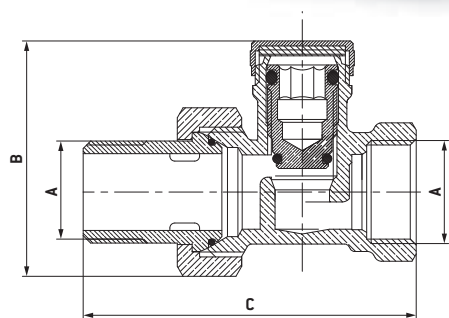

- Female straight lockshield valve with connection for iron pipes
- Maximum nominal pressure: 10 bar
- Temperature range: 0-95°C

Dimensions:


A	B	C
3/8"	45,5	67
1/2"	47,5	67
3/4"	50	83

Packaging/price:

	3/8"	1/2"	3/4"
PIECES PER BOX	15	15	10
PIECES PER CARTON	150	150	100
PRICE	2,99	3,48	4,56

3607...**LOCKSHIELD VALVE**

Radiator valves

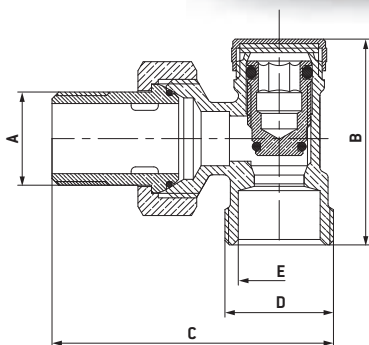

- Angle lockshield valve thread 24x19, with interchangeable connection for copper, plastic and multi-layer pipes
- Maximum nominal pressure: 10 bar
- Temperature range: 0-95°C

Dimensions:

A	B	C	D	E
3/8"	45,5	61	24X19	18,1
1/2"	45,5	62	24X19	18,1

Packaging/price:

	3/8"	1/2"
PIECES PER BOX	15	15
PIECES PER CARTON	150	150
PRICE	2,79	2,96