



- Shower
- Thermostatic
- Wall mounted
- Matt black
- Temperature control handle, Flow control handle

- Eco flow control
- Safety stop against scalding at 38°C, Temperature preset fixable
- Thermostatic cartridge for automatic temperature control, Litter filter(s), Non-return valve(s), Ceramic head part for flow control
- Direct connection, Internal thread

Technical data

Flow properties

Eco-flow at 300 kPa	0.19 l/s
Flow-rate at 300 kPa	0.27 l/s
Pressure loss with flow (0.2 l/s)	165 kPa

Technical properties





Hot water supply	max. +80°C
Working pressure	100 - 1000 kPa
Connection size	G3/4
Installation width	c150 mm
Material	Brass

Regulations

EN standard	EN 1111
Noise class	I (ISO 3822) Oras lab.

Type approvals

STF certificate	VTT-RTH-00085-17
KIWA SE	1598

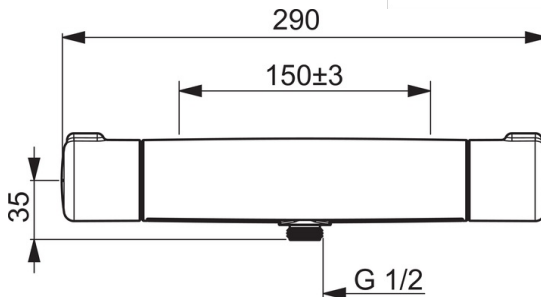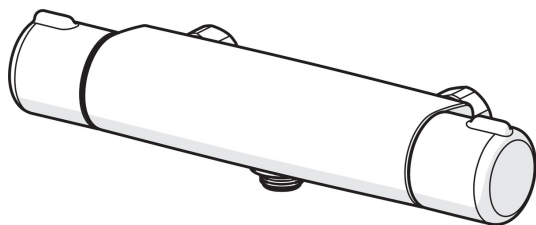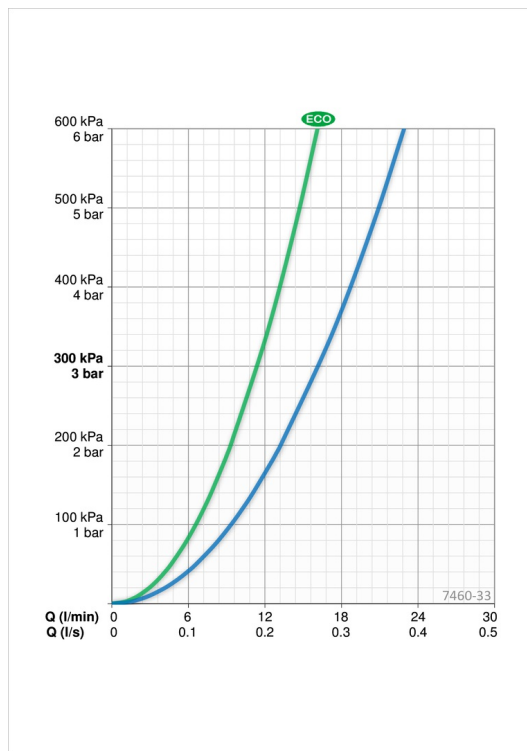



Spare parts

SP7460-33

	Name	Code
02	Headpart	109898
03	Filter sealing, G3/4, DN20	178375V
05	O-ring kit	178796V
06	Thermostatic cartridge	178780V