

EAN: 6414150077333

www.oras.com/en/products/oras/product/7462U



Thermostatic Bath and shower faucet. Eccentric unions and cover plates included. Temperature handle equipped with safety stop at 38°C. Volume handle with diverter and EcoFlow control. The faucet includes litter filters and non-return valves.

- Bathroom, Shower
- Thermostatic
- Wall mounted
- Chrome
- Fixed spout
- integrated diverter with volume control
- Eco flow
- safety stop against scalding at 38°C, Temperature adjustment fixable
- Litter filter(s), Non-return valve(s)

Technical data

Flow properties




Eco-flow at 300 kPa	0.16 l/s
Flow-rate at 300 kPa	0.33 l/s
Pressure loss with flow (0.2 l/s)	230 kPa
Pressure loss with flow (0.3 l/s)	300 kPa

Technical properties


Hot water supply	max. +80°C
Working pressure	100 - 1000 kPa
Connection size	G1/2
Installation width	cc150 mm
Projection	159 mm
Material	brass

Regulations

EN standard	EN 1111
Noise class	I (ISO 3822) Oras lab.

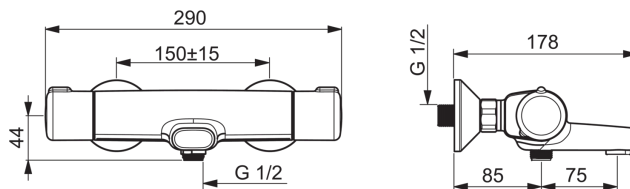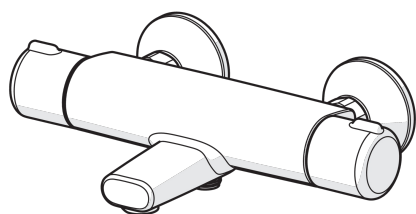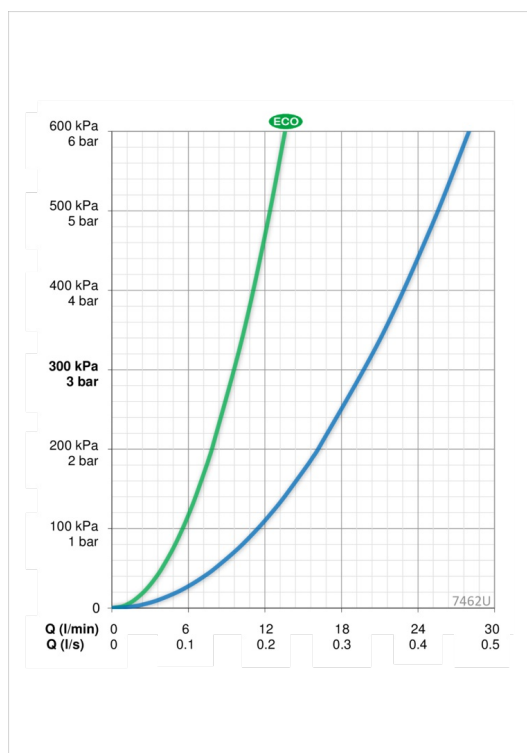

Spare parts

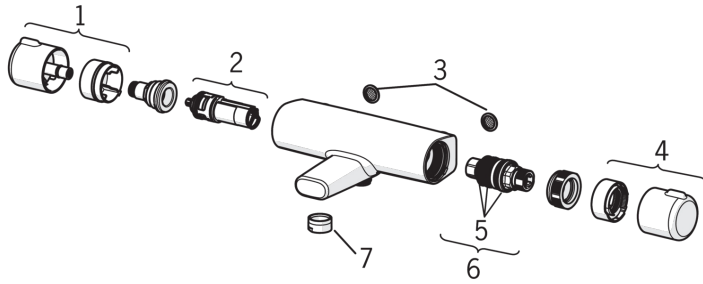

SP7462

	Code
01	602452V
02	601278V
03	198094/2
03	178375V
04	602431V
05	178796V
06	178780V
07	158556