



TIF FI 1215-1  
SAM 40  
M11255

# ÄÄNITEHOTASO SAM 40

## A-painotettu äänitehotaso standardin EN 12102 mukaan

### dBA re 1pW

		Min <sup>1</sup>	Nimelli- nen <sup>2</sup>	Maks <sup>3</sup>
Tuote	L <sub>W(A)</sub>	45,0	49,0	50,0
Ulkoilma	L <sub>W(A)</sub>	44,5	54,0	59,0
Tuloilma	L <sub>W(A)</sub>	44,0	56,0	63,0

<sup>1</sup> 90 m<sup>3</sup>/h paineella 100 Pa

<sup>2</sup> 175 m<sup>3</sup>/h paineella 150 Pa

<sup>3</sup> 250 m<sup>3</sup>/h paineella 175 Pa

## Sound power level according to EN 12102

### dB re 1pW

		Min <sup>1</sup>	Nimelli- nen <sup>2</sup>	Maks <sup>3</sup>
Tuote	L <sub>W</sub>	56,0	60,0	60,5
Ulkoilma	L <sub>W</sub>	57,0	66,0	70,0
Tuloilma	L <sub>W</sub>	59,0	65,5	70,5


<sup>1</sup> 90 m<sup>3</sup>/h paineella 100 Pa

<sup>2</sup> 175 m<sup>3</sup>/h paineella 150 Pa

<sup>3</sup> 250 m<sup>3</sup>/h paineella 175 Pa


## SAM 40

### Äänitehotaso (dBA re 1pW)

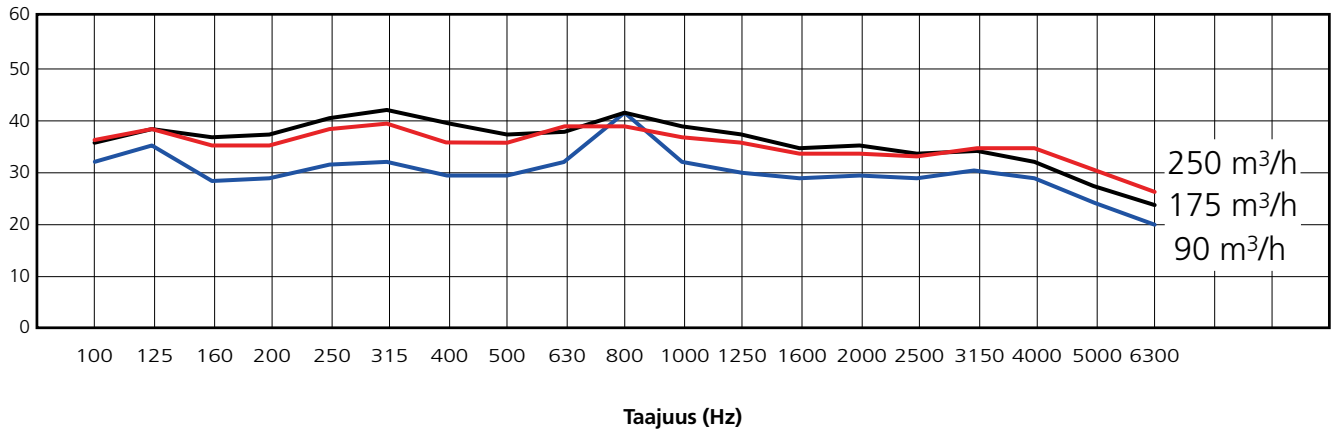

### Ulkoilmakanava

Äänitehotaso  
(dMA re 1pW)

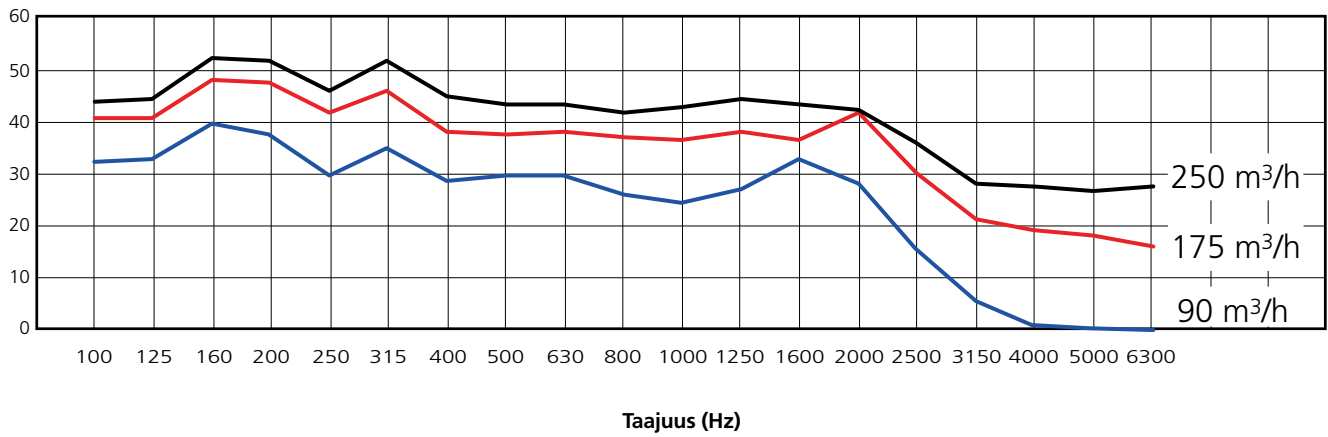

### Tuloilmakanava

Äänitehotaso  
(dMA re 1pW)

