

EAN: 6414150081736

www.oras.com/en/products/oras/product/8222F

Kitchen faucet with swivel spout, smart press pad and aerator. Spout's swing angle is factory preset at 110°, can be limited to 60° or 85°. Smart, remote press pad opens water, pushing again closes water, safety stop after 60 seconds. Red LED light illuminates the temperature control lever to indicate hot water.

Electrical connection with a plug transformer 230/12 V

Design: Mario Trimarchi

F = with flexible pipes



- Kitchen
- Two-grip, Plug-in transformer
- Deck mounted
- Chrome
- Swivel spout

Technical data

Flow properties

Flow-rate at 300 kPa	0.17 l/s
Pressure loss with flow (0.1 l/s)	105 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	181 mm
Material	brass

Software settings


Max. flow period	60 s (4-120 s)
------------------	-----------------------


Electronic properties

Electrical Connection	230 / 12 V
Battery	CR 2450 3 V


Regulations

EMC Directive	CE 2014/30/EU
EN standard	EN 15091
Noise class	I (ISO 3822) Oras lab.
Protection class	IP 55

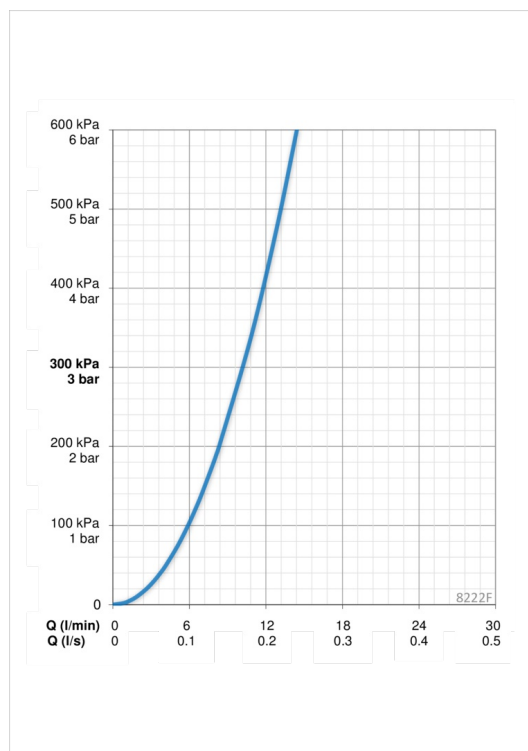

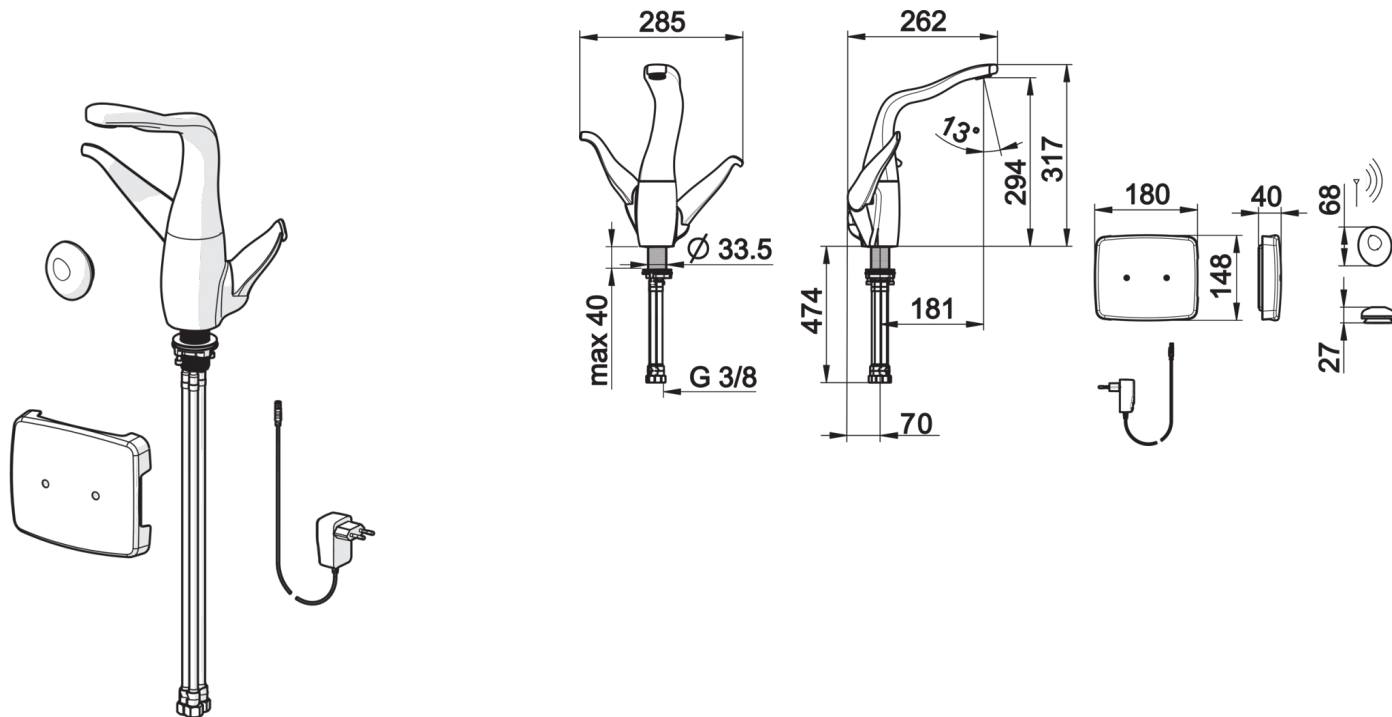

Spare parts

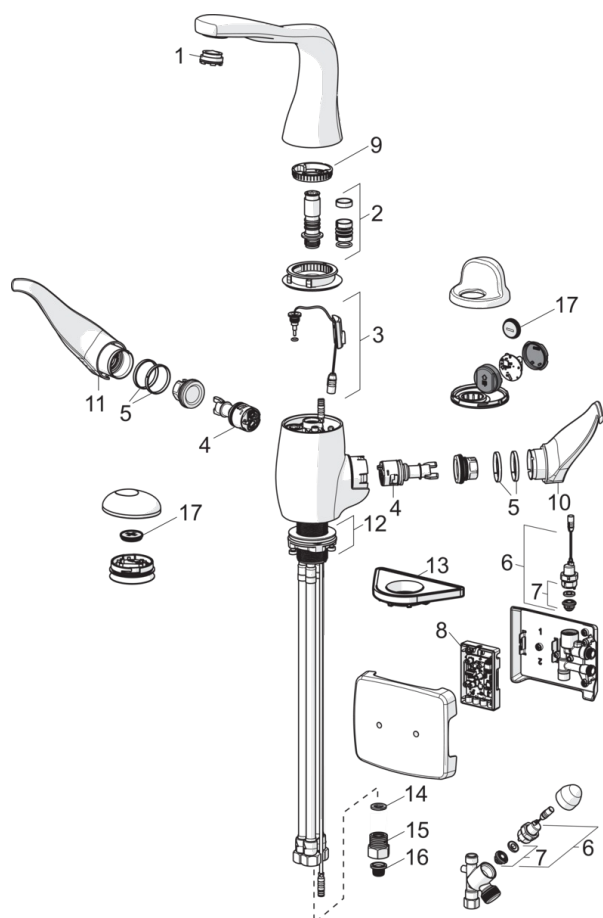

SP8222F

	Code
01	601287V
02	198287V
03	1001729V
04	602547V
05	1001155V
06	601884V-F
07	601512V
08	1002071V
09	602560V
10	602557V
11	602558V
12	602573V
13	158825
14	600705/10
15	198473/2
16	199257/2
17	601468V