



# 8227F ALESSI Swan By Oras - Kitchen faucet with dishwasher valve, 230/12 V

EAN: 6414150081767

www.oras.com/en/products/oras/product/8227F

Kitchen faucet with dishwasher valve, swivel spout, Smart press pad, Smart hand shower and aerator. Spout's swing angle is factory preset at 110°, can be limited to 60° or 85°. Smart, remote press pad opens water, pushing again closes water, safety stop after 60 seconds. Equipped with an on/off and flow rate control, and a temperature control. Red LED light illuminates the temperature control lever to indicate hot water.

The dishwasher valve is opened by pressing the Smart, remote press pad and signal light shows that dishwasher valve is activated. The valve closes automatically after preset period: 4 or 12 hours (one push opens the valve for 4 hours, pushing for 5 seconds opens the valve for 12 hours)

Function of the Smart, remote hand shower: when lifting hand shower from the holder water starts to flow from the faucet; by pressing the trigger water comes from the hand shower. Electrical connection with a plug transformer 230/12 V

Design: Mario Trimarchi

F = with flexible pipes

- Kitchen
- Two-grip, Plug-in transformer
- Deck mounted

- Chrome
- Swivel spout

#### **Technical data**

	$\alpha$	nra	perti	100
г	UW	DI U	veil	ıes

Flow-rate at 300 kPa **0.17 l/s**Pressure loss with flow (0.1 l/s) **105 kPa** 

## **Technical properties**

Hot water supply max. +70°C

Working pressure 100 - 1000 kPa

Connection size G3/8

Material brass

#### **Software settings**

Dishwasher valve open period 4 h / 12 h

Max. flow period 60 s (4-120 s)

## **Electronic properties**

Electrical Connection 230 / 12 V
Battery CR 2450 3 V


#### Regulations

EMC Directive C € 2014/30/EU


EN standard EN 15091


Noise class I (ISO 3822) Oras lab.

Protection class IP 55

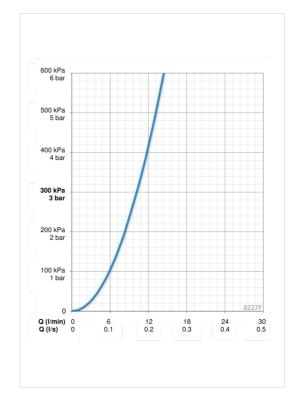




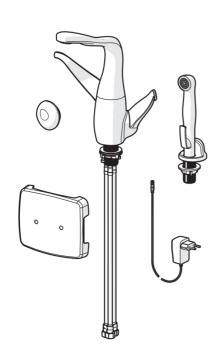

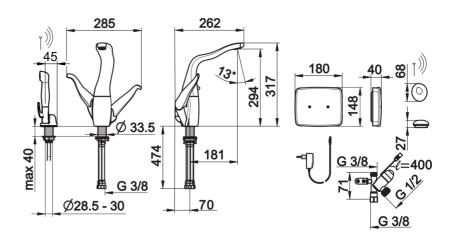

# Spare parts

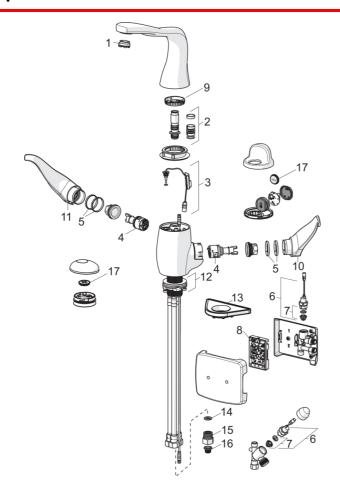

S	P	8	2	2	2	F

	Code
01	601287V
02	198287V
03	1001729V
04	602547V
05	1001155V
06	601884V-F
07	601512V
80	1002071V
09	602560V
10	602557V
11	602558V
12	602573V
13	158825
14	600705/10
15	198473/2
16	199257/2
17	601468V