


## Preflex prewired conduits with H07Z1-U halogen free installation wires

mm <sup>2</sup> core	mm outerØ cable	kg/km cable	Ω/km 20°
1,5	2,8mm	19	12,1
2,5	3,3mm	29	7,41
6	4,4mm	65	3,08

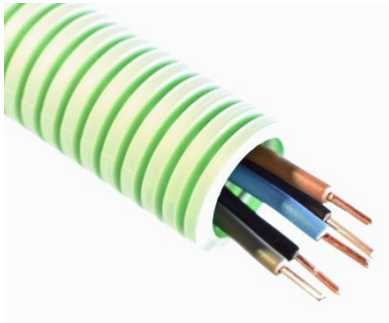

### Cable description :

Halogen free installation wires for wiring inside protected permanent fixtures, inside appliances and in -or on- lighting fittings.

<HAR> certified.

### Insulation :

Halogen free

### Operating voltage :

450/750 V

### Test voltage :

2500 V

### Operating T° :

-40°C to +50°C

cable type	conductor colors	Ø conduit	kg/km total	standard packaging
3G1,5	Green/yellow blue brown	16	105	coil 100m
3G1,5	Green/yellow blue brown	20	125	coil 100m
5G1,5	Green/yellow blue brown black grey	20	163	coil 100m
7G1,5	Green/yellow blue brown black grey white red	20	201	coil 100m
3G2,5	Green/yellow blue brown	16	135	coil 100m
3G2,5	Green/yellow blue brown	20	155	coil 100m
5G2,5	Green/yellow blue brown black grey	20	213	coil 100m
1G6	Green/yellow	16	113	coil 100m