


## Uni Install excl. light source

### Technical data

<b>Voltage</b>	220-240 VAC 50 Hz
<b>System effect</b>	Max. 7.5W LED
<b>Carving dimensions</b>	Ø75 mm
<b>Installation height</b>	63 mm
<b>Exterior dimensions</b>	Ø87 mm / 87 x 87 mm
<b>Dimensions connector box</b>	L: 85 mm, W: 55 mm, H: 30 mm
<b>Tilt angle</b>	30°
<b>Possibility of through wiring</b>	Yes, 3G1.5
<b>IP-class</b>	IP44 (depends on the light source)
<b>Insulation class</b>	Class II
<b>Material</b>	Aluminium, plastic
<b>Environment</b>	Indoors
<b>Warranty</b>	5 years
<b>Approvals</b>	CE

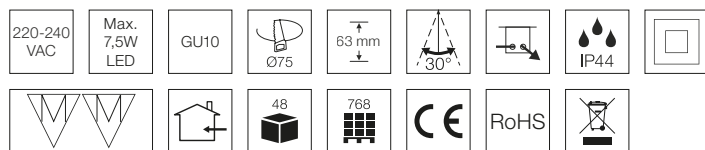


### Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Quick and easy mounting
- Mounting with screws or adjustable springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Adjustable springs for ceiling thickness up to 44 mm
- Adjustable screws for ceiling thickness up to 35 mm
- Designed and developed in Denmark

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
1221	5704629012219	Matt white	Round
1222	5704629012226	Brushed alu	Round
1223	5704629012233	Matt white	Square
1224	5704629012240	Brushed alu	Square
1227	5704629012271	Chrome	Round
1228	5704629012288	White	Round
1229	5704629012295	White	Square
1230	5704629012301	Matt black	Round

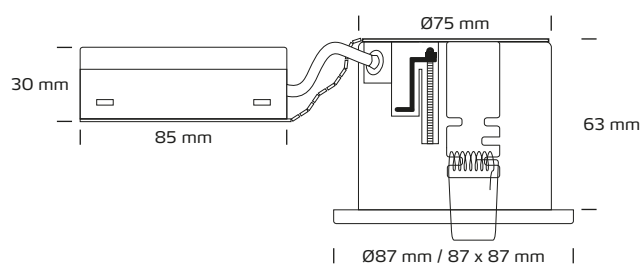

\*The drawing is not drawn to scale