
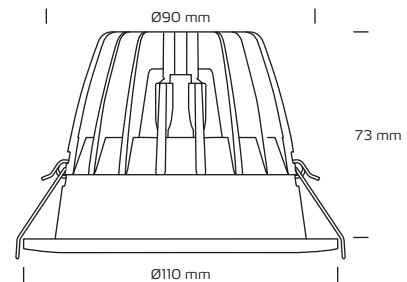


Zita 15W, 3000K

Technical data

Hole diameter:	Ø90 mm
Height:	73 mm
Front size:	Ø110 mm
Amperage / voltage:	350mA / 36V
System effect:	15W
Light source:	Integrated CITIZEN LED, 3000 Kelvin
Light intensity:	1080 Lumen
Colour rendering:	CRI>90
SDCM:	3
Beam angle:	36°
Dimmable:	Yes
IP-class:	IP20 / IP44 (is intended for installation in areas 1 and 2)
Insulation class:	Class III / II
Material:	Plastic, aluminium
Possibility of through wiring:	5-pole connector box for loop in and out with DALI / Push and mains
Colour code:	RAL 9003

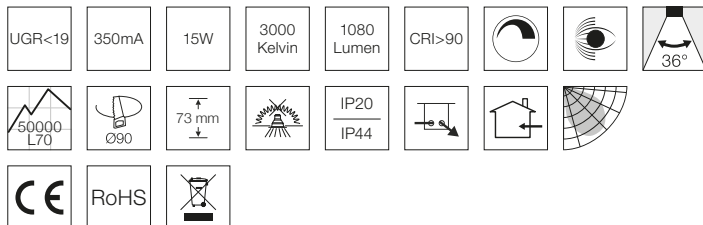

*The drawing is not drawn to scale

Product information

- UGR<19
- FlickerFree
- DALI / PUSH Cc driver
- Quick and easy mounting
- Mounting with springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Ceiling thickness for mounting is up to 25 mm

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

} LED

LED downlight

874/2012

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
20111013	5704629000568	Matt white (RAL 9003)	Round