
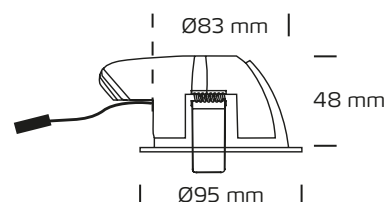


Velia PRO Large Tilt 9W, 2700K

Technical data

Amperage	500mA
System effect	9W
Light source	CREE LED
Colour temperature	2700 Kelvin
Light intensity	650 Lumen
Colour rendering	CRI>95
Expected lifespan	50,000 hours L90 B10 100,000 hours L70 B50
Dimmable	Yes, using recommended drivers
Flicker free	Yes, according to the new Ecodesign / ErP directive (September 2021)
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<3
Beam angle	38°
Carving dimensions	Ø83 mm
Installation height	48 mm
Exterior dimensions	Ø95 mm
Tilt angle	45°
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class III
Material	Plastic, aluminium, glass
Environment	Indoor
Warranty	5 years with Nordtronic driver
Approvals	CE

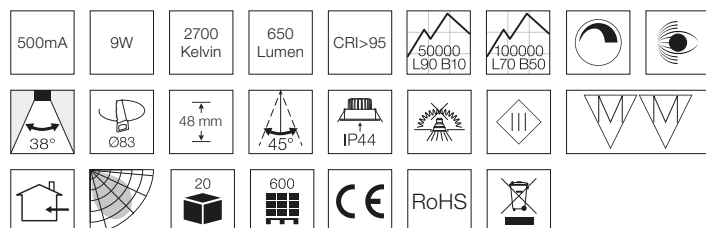

*The drawing is not drawn to scale

Product information

- High colour rendering index (CRI)
- High lumen output
- Glare free
- Flicker free according to the new Ecodesign / ErP directive (September 2021) when using recommended drivers
- 45° tilt angle, perfect for use in sloped ceiling, wardrobe, gallery lighting etc.
- Mounting with springs
- Quick and easy mounting
- Ceiling thickness for mounting is up to 26 mm

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
30132012	5704629000858	Matt white	Round

Drivers

Item no.	EAN no.	Type
98544013	5704629000902	Triac
98525015	5704629000599	Dali / Push
1889	5704629018891	Dali / Push 0.1-10V