




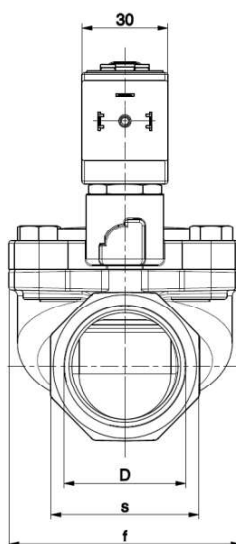

SOLENOID VALVE
2/2 - NC (Normally closed)
Pilot operated
G1 ¼ ÷ 2

L182D-BIG

G 1" ¼ ÷ 2"

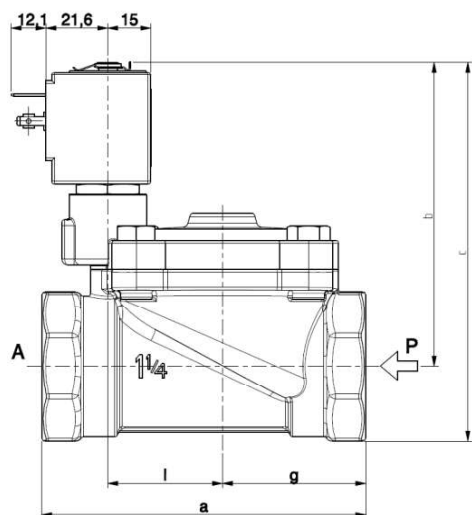

D	a	b	c	f	g	l	s
G 1 ¼	113	106	132	81	50	40	52
G 1 ½	140	110	140	110	64	53	60
G 2	157	114	150	110	72	53	72

► **GENERAL FEATURES**

Diaphragm valve, pilot operated, having full orifice.
Suitable to shut off liquid and gaseous fluids (verify the compatibility of fluid with materials in contact).
Not suitable for use with dangerous fluids listed in Group 1, therefore they are free from CE marking in conformity with article 3 § 3 of the European Directive 97/23/EC (Pressure Equipment Directive).
WRAS certified solenoid valves (certificate n. 1411048).

► **TECHNICAL FEATURES**

Maximum allowable pressure (PS) 10 bar

Response times

Opening time (ms)

Closing time (ms)

Fluid temperature

Max viscosity

	1 1/4	1 1/2	2
Opening time (ms)	100	360	360
Closing time (ms)	650	650	650

-10°C +85°C

5°E (~37 cStokes or mm²/s)

► **MATERIALS IN CONTACT WITH FLUID**

Body	Brass
Sealing	EPDM
Internal components	Brass and stainless steel
Seat	Brass
Guide assembly	Stainless steel
Shading ring	Copper

► **COIL**

Approval	UL (class F) – for UL cl.H: ZA34
Continuous duty	ED 100%
Encapsulation material	PPS (Polyphenylsulfure) fiberglass reinforced
Coil insulation class	F (155°C) on request class H (180°C)
Ambient temperature	-10°C +50°C
Electric connections	DIN 46340 - 3 poles connectors (EN175301-803)
Protection degree	IP 67 (EN 60529) with plug connector
Voltages DC	12-24V (+10% -5%)
AC	24V/50Hz - 110V/50Hz (120V/60Hz) - 230V/50Hz (+10% -15%)
	(Other voltages and frequencies on request)


Port size ISO 228	Orifice size, (mm)	Differential pressure (bar)					Kv (m³/h)	Series and type			Power absorption			Sealings	Notes	Weight (kg)
		Δp min	Δp max													
			Gases		Liquids											
			AC	DC	AC	DC		Valve	Valve with manual override	Coil	AC (VA)		DC (W)			
									Inrush	Holding						
G 1 ¼	30	0,50	10	10	10	10	15	L182D48	L182D49	ZA10A	23	14	9	EPDM	-	1,590
G 1 ½	45						27									2,510
G 2	45						34									2,990

► **NOTES**

- Sealings: EPDM = Ethylene-propylene elastomer
- Operation with gaseous fluids at high pressure without any outlet restriction can reduce the diaphragm life.
- UL approved coil (E153691)

L182D-BIG G 1" ¼ ÷ 2"

► SPARE PARTS

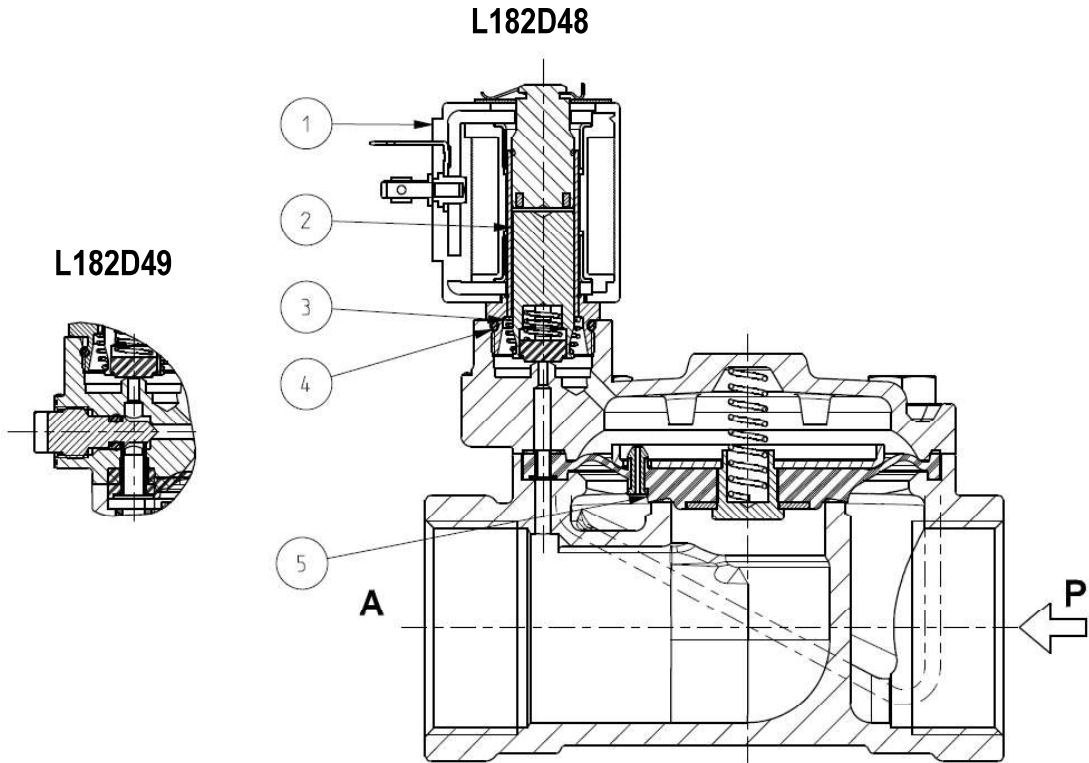

Kit description	Kit P.N.		Consisting of:
Core kit	G3146803		Core pos. 2 Core return spring pos. 3 OR guide assembly pos. 4
Diaphragm kit	G 1 ¼	2400804R	Diaphragm assembly pos. 5
	G1 ½ - 2	2401305R	
Coil	ZA10A		Coil pos. 1

► MOUNTING

Solenoid valve can be mounted in any position; vertical with coil upwards preferred.

THE VALIDITY OF REPORTED DATA IS REFERRED TO THE DATE OF ISSUE. POSSIBLE UPDATES ARE AVAILABLE ON REQUEST.