


## Operating instructions for CX3 All Size Compression Tool

- 1) Install the proper plunger tip:
  - Plunger A for F short RG6/59
  - Plunger B for BNC Male RG5/59
  - Plunger C for F & IEC RG 6/59
  - Plunger C for F Male RG7/11
- 2) Turn the tool head to select for RG6/59 sizes or RG7/11 sizes.
- 3) Prepare the cable and install your Cabelcon CX3 connector on the cable according to instructions.
- 4) Open the lever arm and insert your connector as shown on picture 2.
- 5) Close the lever arm until fully closed.
- 6) Open the lever arm and remove the compressed connector.

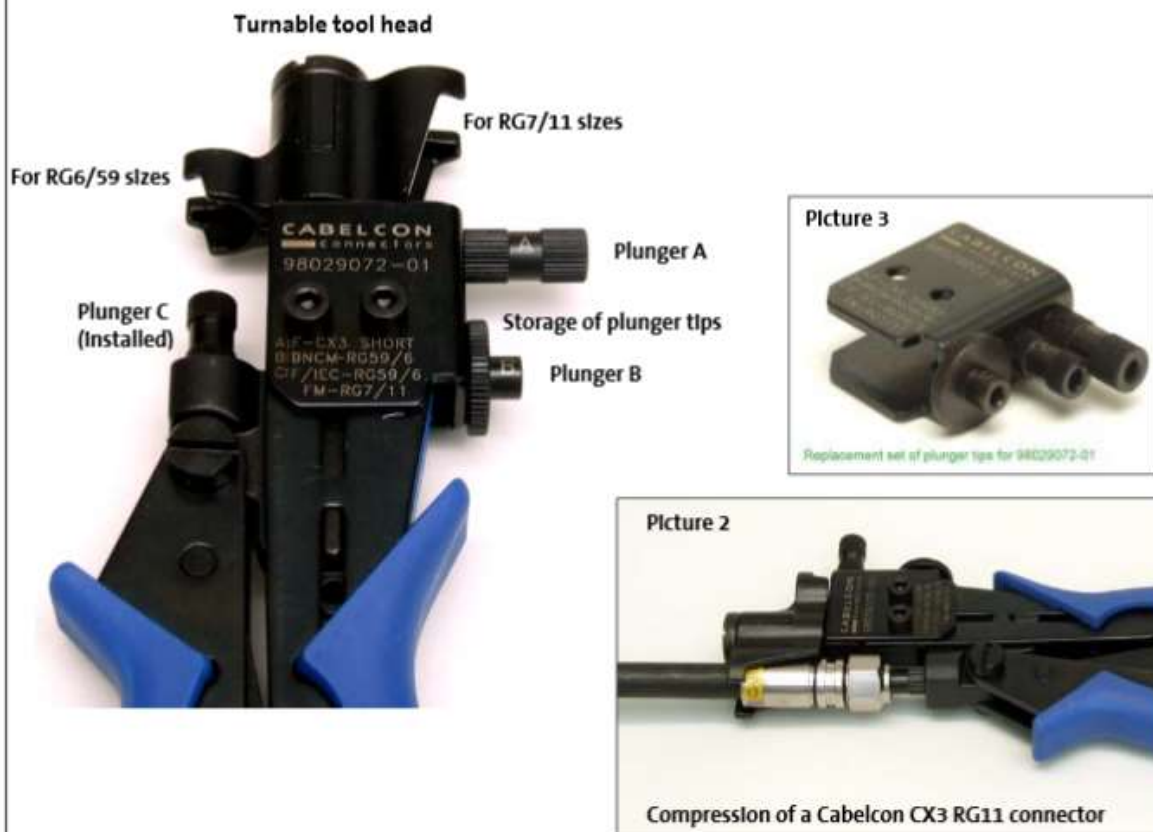

COMPRESSION TOOL CX3 ALL SIZE F, BNC & IEC for RG6/7/11/59  
Plunger tips kit for 98029072 (see picture 3)

98029072-01

98029997

Rev. 160610