

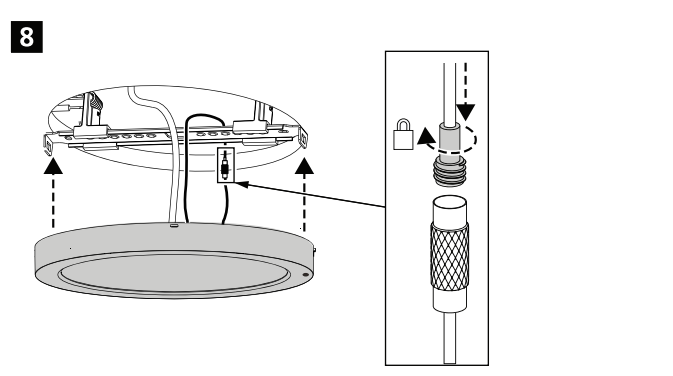
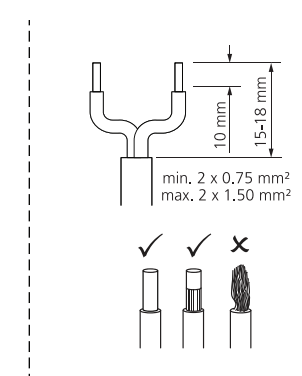
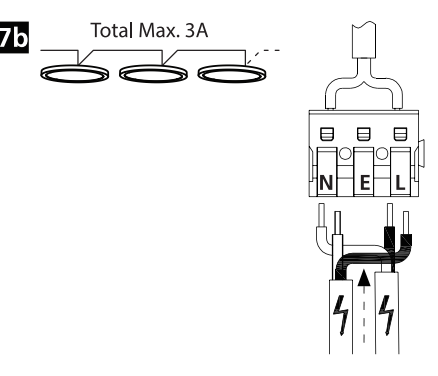
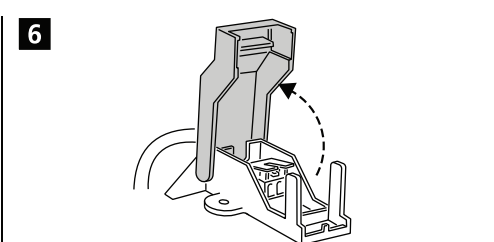
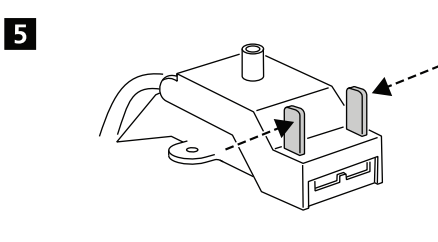
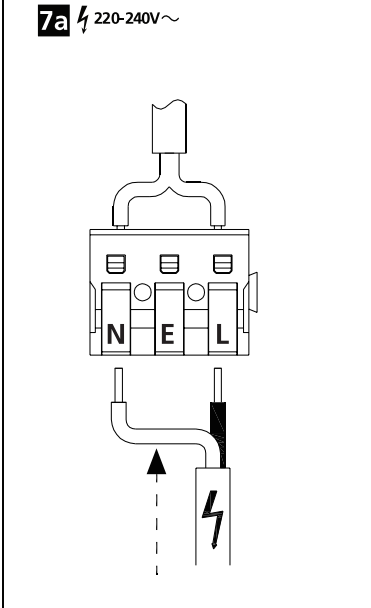
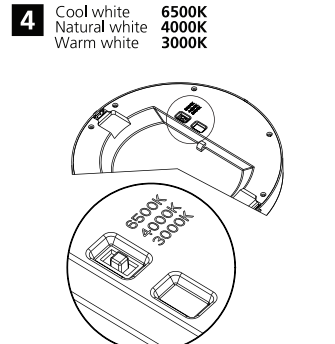
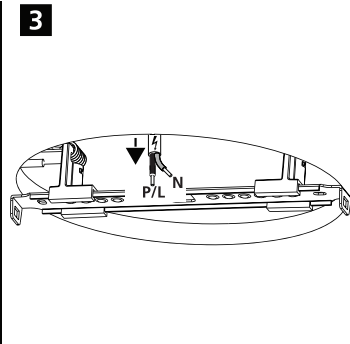
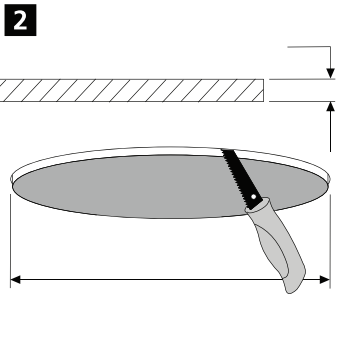
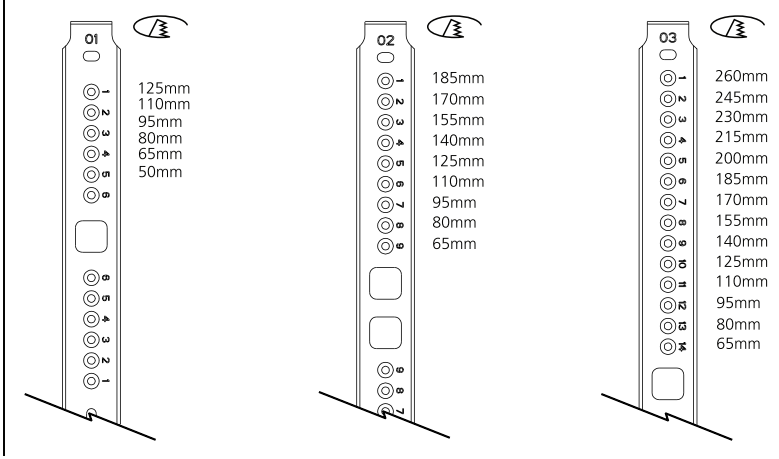
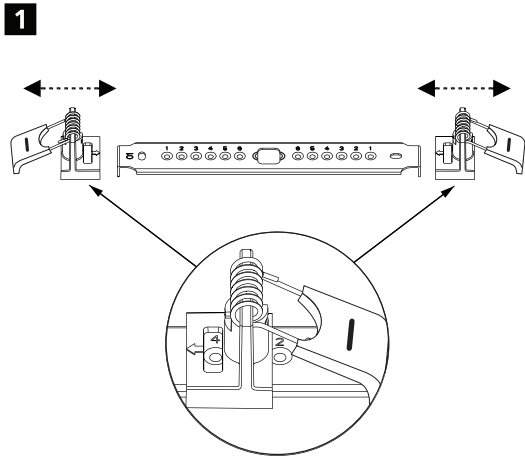


Product Description	L (mm)	W (mm)	H (mm)
Start Downlight 5in1 50-125	225	225	60
Start Downlight 5in1 65-185	285	285	60
Start Downlight 5in1 65-260	360	360	60

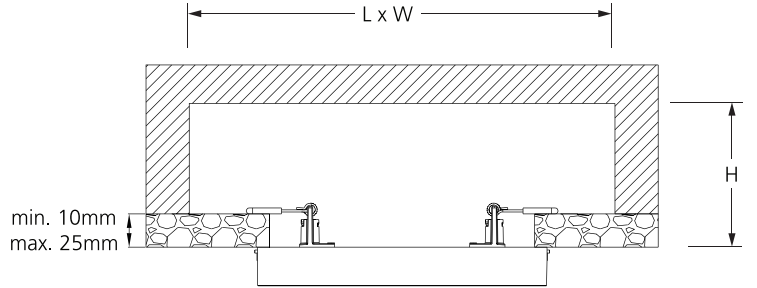


9

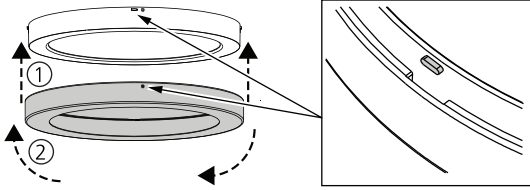


0053153 0053156
0053154 0053157
0053155 0053158


1 Start Downlight 5 in 1 (Surface Mount)

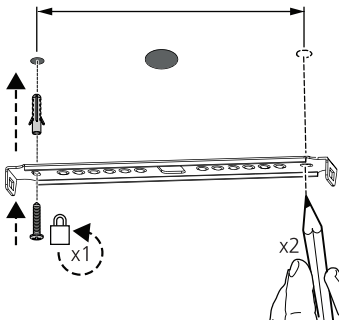


2

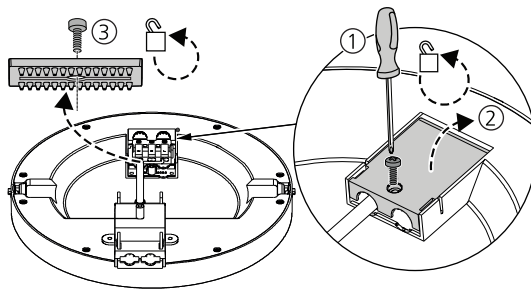


3 220-240V ~ + □

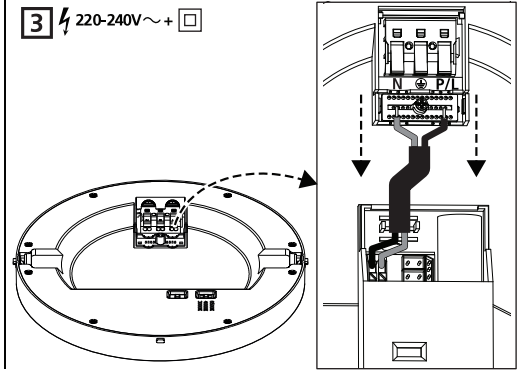


4

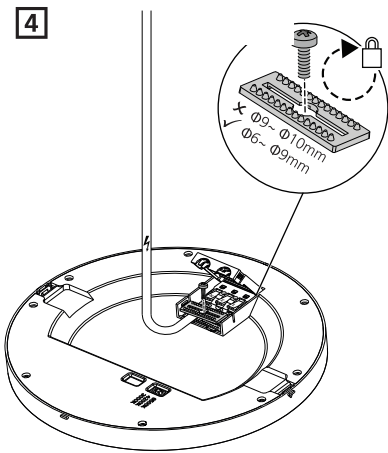









5



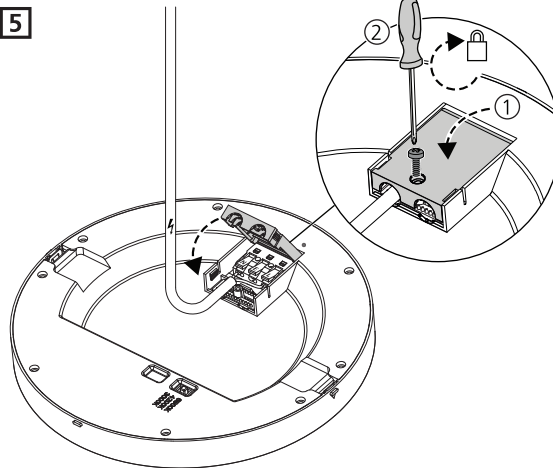


6

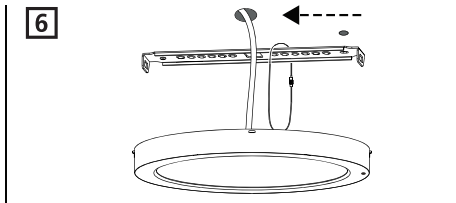

7

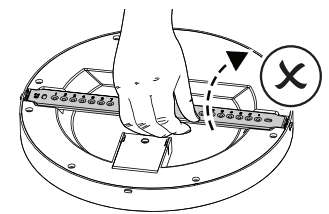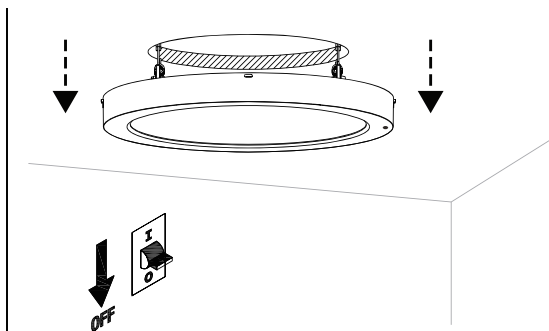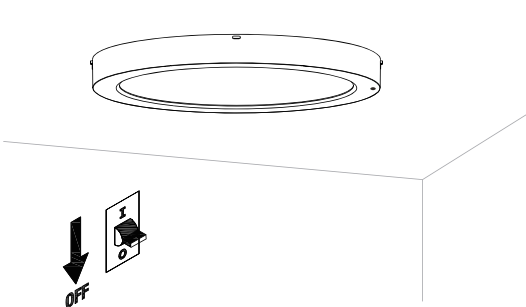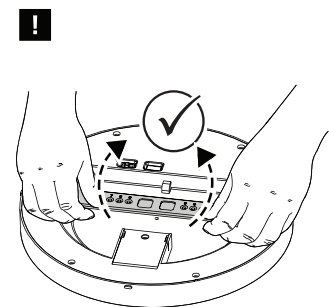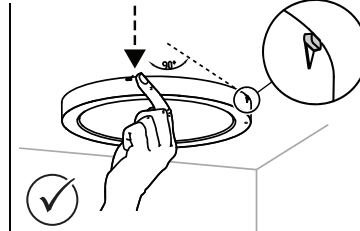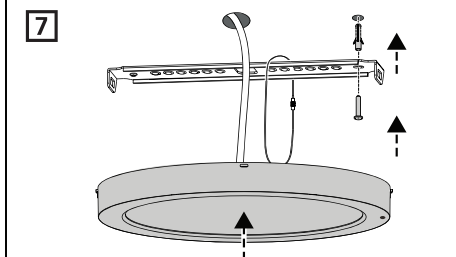

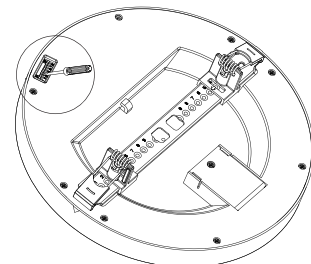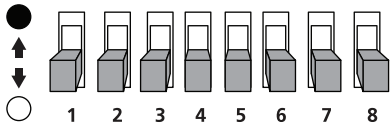

Start Downlight 5in1 PIR

A - 65-185

1 Brightness

- 50% (9W)
- 100% (18W)

B - 65-260

1 Brightness

- 50% (11W)
- 100% (23W)

2	3	CCT
●	●	3000K
○	●	4000K
●	○	6500K
○	○	-

4	5	LUX
●	●	10lux
○	●	20lux
●	○	40lux
○	○	24h

6	7	Delay
●	●	5s
○	●	30s
●	○	60s
○	○	180s


8	Light ON/OFF Settings
●	ON (No Dimming)
○	OFF (Dimming - 1sec ON / 3 sec OFF)



A - 65-185

1 POWER

- 50% (9W)
- 100% (18W)





A	B
9W	11W
●	●
↑	↑
○	○
18W	23W

B - 65-260







1 POWER

- 50% (11W)
- 100% (23W)


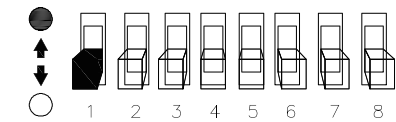


CCT
3000K
4000K
6500K




2	3	CCT
●	●	3000K
○	●	4000K
●	○	6500K
○	○	—

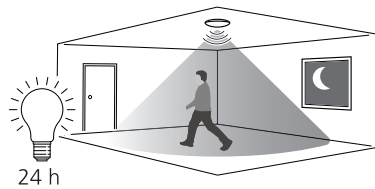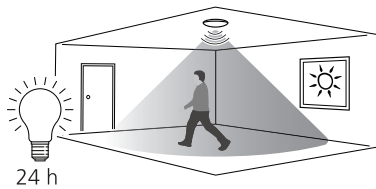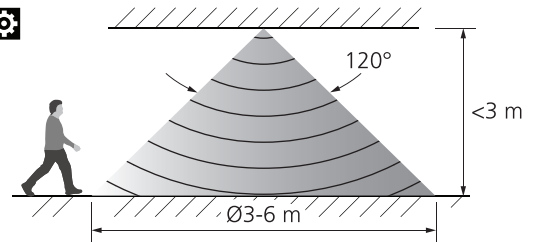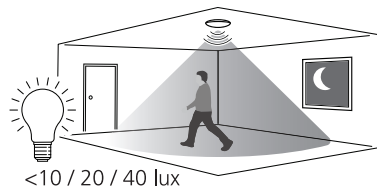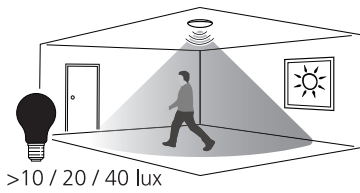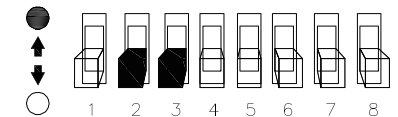

4	5	LUX
●	●	10 lux
○	●	20 lux
●	○	40 lux
○	○	24 h

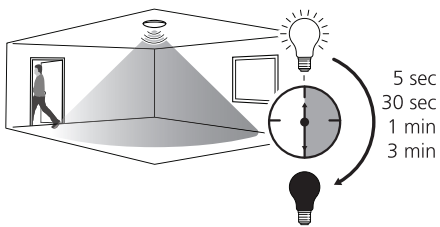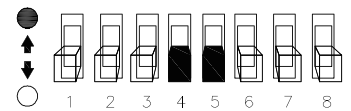

6	7	Delay
●	●	5 sec
○	●	30 sec
●	○	60 sec
○	○	180 sec

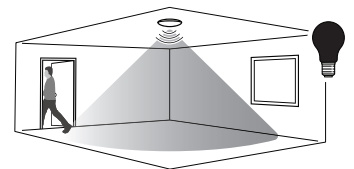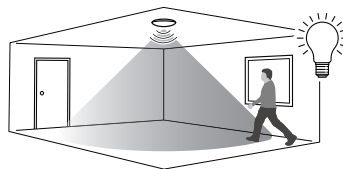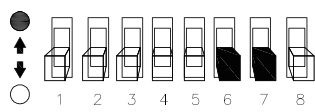

8 Light ON/OFF Settings

- ON (No Dimming)
- OFF (Dimming - 1sec ON / 3 sec OFF)

