


exNode Z18 BTDA


exaktor

Montage / Mounting / Asennus

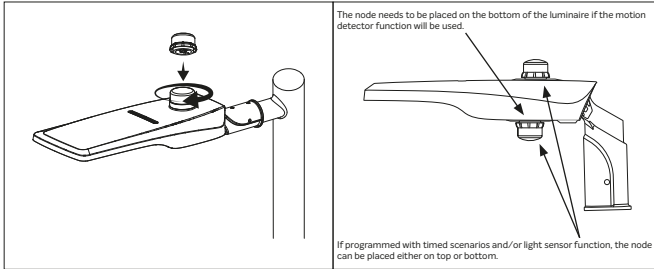

Detekteringsområde / Detection area / Tunnistusalue

13 019 67 - STYRENHET exNODE Z18 BTDA

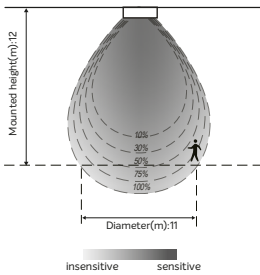


Height (m)	Sensitivity				
	100%	75%	50%	30%	10%
Diameter (Ø.m)					
12	11	9	6	none	none
8	12	10	6	2	none
5	13	11	7	5	2
3	14	12	8	6	5

13 020 42 - Styrenhet exNode Z18 PIR


A: Tangential movement	B: Radial movement	Mount height	Tangential Movement (A)	Radial Movement (B)
		3m	max 50m² (Ø = 8m)	max 13m² (Ø = 4m)
		5m	max 79m² (Ø = 10m)	max 13m² (Ø = 4m)
		8m	max 154m² (Ø = 14m)	max 13m² (Ø = 4m)
		12m	max 314m² (Ø = 20m)	max 13m² (Ø = 4m)

Måttskiss / Masurement / Mitat

13 019 67 - STYRENHET exNODE Z18 BTDA

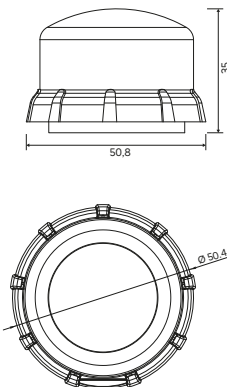

13 020 42 - Styrenhet exNode Z18 BTDA PIR

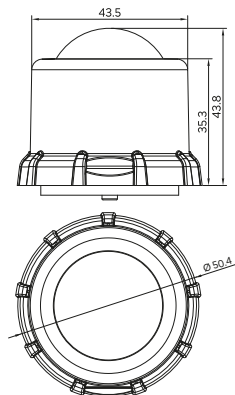

BTDA app



iOS

Exaktor Koolmesh



android

Koolmesh



Bluetooth räckvidd/Bluetooth range/Bluetooth kantama




Max 30m (Indoor)
Max 50m (Outdoor)

Smart Phone to Device Range



Återvinning/Recycling/Kierrätys



För mer information och manualer, skanna QR-koden!
For more information and manuals, scan the QR code!
Lisätietoja ja käyttöohjeita skannaamalla QR-koodi!