



## Contact us

**ABB Oy**

Muuttitie 2A 65320

Vaasa, Finland

[abb.com/lowvoltage](http://abb.com/lowvoltage)

© Copyright 2025 ABB. All rights reserved.

Specifications subject to change without notice.

34OT\_G2-68 rev. C / 15CC301135M0201 # 04.04.2025

## OT Plus OT63...80G2- & OTC63...80G2-




TSG2-3



TSG2-1


PNG2  
PEG2

AUXGB-11  
AUXGM3-11



OT63G2-6BS  
OT80G2-6BS


OTC63G2-3BS  
OTC80G2-3BS

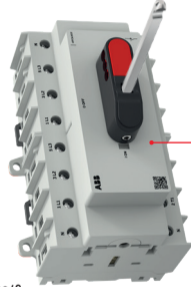

OT63G2-8BS  
OT80G2-8BS


OTC63G2-4BS  
OTC80G2-4BS

## Mounting

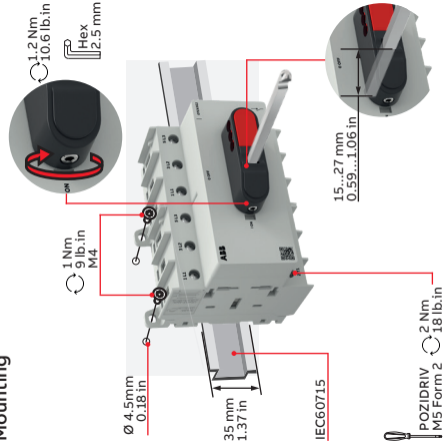


## Padlock

Ø 6 mm  
0.23 in

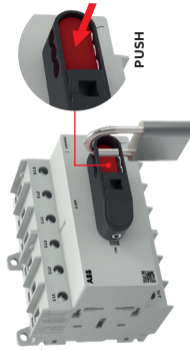

## Adjustable neutral pole timing

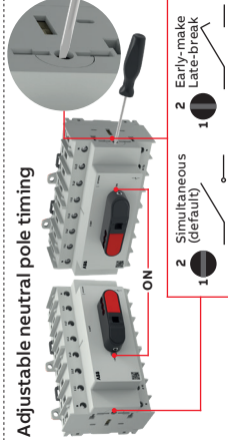

## Clearances per UL60947-4-1



## Wire type 1 Wire 2 Wire Stripping Tightening

Wire type (Cu only)	(mm <sup>2</sup> )	(mm <sup>2</sup> )	length	torque
Class 5-Flexible	1.5-35	1.5-16		
Class 2-Stranded	1.5-35	1.5-16		
Class 6-Very flexible with ferrule	1.5-4	1.5-4		
Class 1-Solid	1.5-6	1.5-6		
UL - CU wire size (AWG)	16-2	16-8		

## OTC63...80G2-

	OFF	OFF	OFF
Switch I			
Switch II			



Warning! Hazardous voltage! Installation by person with electrotechnical expertise only.

